## specifications


## SIZO IPIE Refrigeration

## **TMF1000N-A Series**

ActiveCore Series, 2 Door (Glass), Upright Freezer

Project:

Item No:

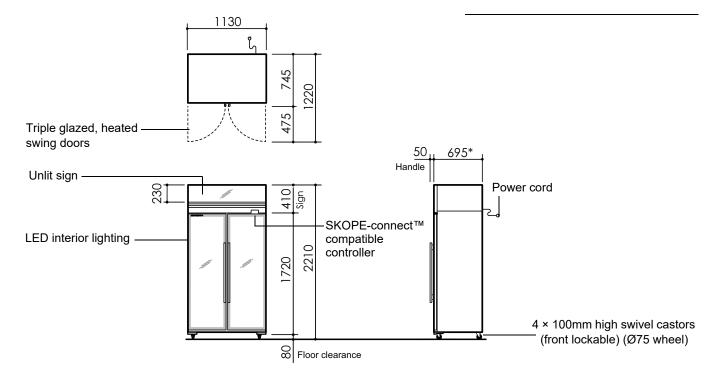

**CABINET** 

Doors 2 × self-closing, triple glazed, single Low-E film, heated, lockable, argon

filled, toughened safety glass swing doors (hinged LH, RH)

Internal door opening 2 × door openings: 1570mm high × 450mm wide

Shelves 5 × adjustable height wire shelves: 1015mm wide × 470mm deep

Sign Unl

Material Powdercoat galvanised steel

**PERFORMANCE** 

Max. ambient temp. 40°C

Temperature range -21°C to -18°C (adjustable with SKOPE-connect™ -26°C to -12°C)

Standard: ≤63.5 dB(A) Hush Mode: ≤61.5 dB(A)

GEMS class L1

GEMS energy consumption 16.17 kWh/24h

GEMS annual running cost \$1,771 p.a.(@ \$0.30/kWh)

**ELECTRICAL** 

Noise measurement

Electrical safety climate class 5

Interior side lighting 2 × 1400mm, 15W LED

Power cord Supplied with 10 Amp plug and 2.3m lead
Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 5.5 Amps (includes unit 3.5 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect™ compatible)

Connectivity interface Bluetooth

Refrigeration system Top mounted, integral, removable ActiveCore freezer cartridge

(UTHDNI-0043)

Refrigerant R290 / 107g (natural refrigerant)

Nominal capacity
Heat rejection (Avg./Peak)
Drainage

920 Watts (4500rpm)
680 Watts/825 Watts
No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited

## DIMENSIONS External Internal 1570mm 1130mm 1030mm

Depth 745mm Floor area 0.84m<sup>2</sup> Weight 225kg Volume 980L

\* Depth 695mm excludes removable door handle and dool lock bracket

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions Overall cabinet dimensions		
±5mm		
-5mm to +10mm		
Length of multiple cabinets		
At each joint	At each end wall	
±5mm	+15mm	
-5mm to +10mm	+15mm	
	cabinet allow the foll  Overall cabinet d  ±5mm  -5mm to +10mm  Length of multipl  At each joint  ±5mm	

Ventilation requirements	
Тор	300mm
Sides	Not required
Back	10mm
Bottom	Not required



Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673 Email: skope@skope.com, Website: www.skope.com







554mm