

Standard Pallet Jack / 2.5T - 685mm Wide

Industrial Pallet Jack - 2500kg Capacity.

Built for long-lasting performance, this heavy-duty pallet jack is designed to handle loads of up to 2500kg with ease. Ideal for use in warehouses, retail stores, and construction sites, it enables safe and efficient transport of a wide range of standard palletised goods.


Features

- **Robust Construction:** Made from strong, torsion-resistant steel for reliable performance under demanding conditions.
- **Reinforced Forks:** Ribbed fork design enhances structural strength and load stability.
- **Standard Pallet Compatibility:** Suitable for use with standard-sized pallets for maximum versatility.
- **Efficient Entry/Exit:** Lead-in and lead-out rollers under the fork tips allow for smooth pallet entry and removal.
- **Maintenance-Free Hydraulics:** Hydraulic unit and bearings are sealed and require no routine maintenance.
- **High-Visibility Finish:** Powder-coated in safety yellow for improved visibility and added protection against wear and corrosion.
- **Overload Protection:** Integrated pressure relief/overload valve prevents excessive load, enhancing safety and OH&S compliance.
- **Durable Nylon Wheels:** Ideal for concrete and other hard surfaces, nylon wheels reduce the push/pull force required, making load handling more efficient.



Specifications

Model		MPT2500
Capacity	(kg)	2500
Min Fork Height	(mm)	75
Max Fork Height	(mm)	190
Fork Width	(mm)	160
Fork Overall Width	(mm)	685
Fork Length	(mm)	1150
Overall Size L x W x H	(mm)	1540x685x1230
Load Roller (dia x width)	(mm)	Ø74x93
Steering Wheel (dia x width)	(mm)	Ø180x50
Net Weight	(kg)	70

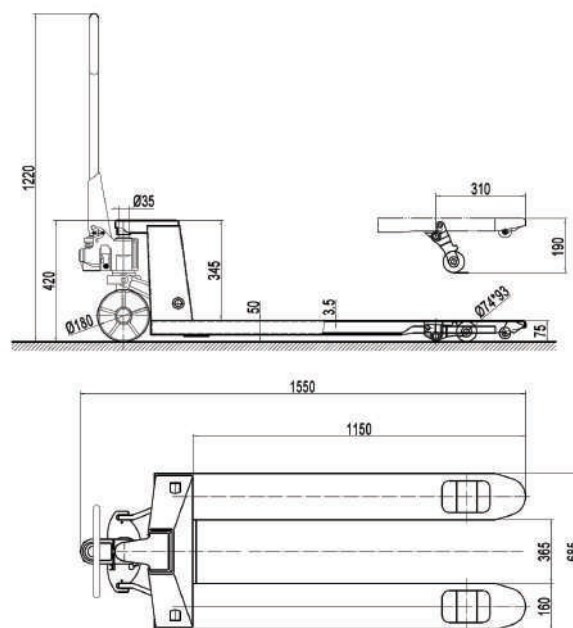

Visit www.mitaco.com.au for more photos and details

Mitaco has national sales and distribution capabilities, our sales office and warehouse is located in Brisbane. Large inventory holdings enable fast-track dispatch of stock orders. This combined with an easy to use online ordering system makes the delivery of stocked products simple, fast and reliable.