
Flexo CS Coverplate EJs

Flexo CS: The most widely used stainless steel floor coverplate expansion joint system. FxCS is used in retail centres, supermarket and department–store trading floors, airports terminals, apartment developments, public buildings etc. Offering multi-directional movement, and composite c-bars, it is compatible with most floor finishes.





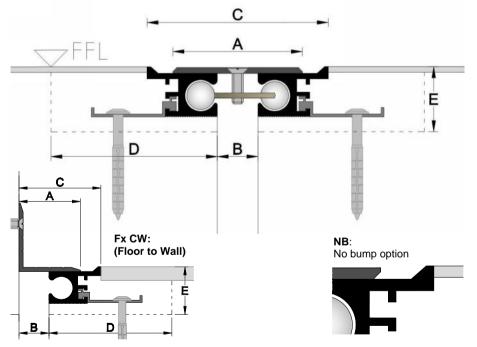

Fx CS

Previous Model No: UACS











Performance

Concealed Fixings

Thermally Dynamic

High Capacity

Low Maintenance

Bead blasted cover plate Slip resistance Class V Tested to AS4586 2013

Compatible Finishes

Tiles Vinyl Carpet Epoxy

Standard Length

4.8m

Standard Finish

No.4 Stainless Steel

Options

Stainless Steel











| | A: Coverplate | | B: Gap | | | | C: Exposed Width | | |
|---------|---------------|-----------|--------|------|------|-------|------------------|------|------|
| Product | Width | Thickness | Min. | Mid. | Max. | Mvmt. | Min. | Mid. | Max. |
| Fx50CS | 50 | 3 | 6 | 26 | 46 | 40 | 63 | 83 | 103 |
| Fx70CS | 70 | 3 | 6 | 36 | 66 | 60 | 82 | 112 | 142 |
| Fx100CS | 100 | 3 | 36 | 66 | 96 | 60 | 112 | 142 | 172 |
| Fx120CS | 120 | 3 | 56 | 86 | 116 | 60 | 132 | 162 | 192 |

4mm Linished Stainless Steel Coverplate Available

Block Out: 90D x 35E

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.2