

Electric Towing Tug – 3.5 Tonne Capacity with Tow Bar & Hitch

The KMT-T35F Electric Towing Tug is designed to safely and efficiently move loads up to **3500kg** in warehouses, airports, factories and other industrial environments. Compact and highly manoeuvrable, it is ideal for towing trailers, boats, caravans, light aircraft, vehicles and other wheeled loads where controlled movement is required.

Featuring an adjustable tow bar and front towing hitch, the KMT-T35F can both pull and push loads with minimal operator effort. Easy-to-use handle controls, battery level indicator and battery-powered operation provide smooth and reliable performance throughout the working day.

Features

- 3500kg towing capacity.
- Adjustable tow bar and front towing hitch included.
- Suitable for pulling and pushing wheeled loads.
- 24V DC drive system for reliable operation.
- Easy-to-use steering handle with conveniently located controls.
- Battery level gauge.
- Large tyres for improved traction.
- Durable steel construction for industrial use.
- Powder-coated finish for long-term durability.
- Compact design for confined work areas.
- Batteries and battery charger included.




Specifications

Model	KMT-T35F	
Rated Capacity	(kg)	3500
Driving Motor	(V/W)	24/1500
Travel Speed	(km/h)	0-3.5
Battery	(V/Ah)	2×12/120
Charger	(V/A)	Built-in 24/15
Turning Radius	(mm)	1675
Front Wheel	(mm)	375×115
Rear Wheel	(mm)	125×50
Support Wheel	(mm)	100×50
Overall Dimensions	(mm)	1915×805×1230
Net Weight	(kg)	350



Visit www.mitaco.com.au for more photos and details

Mitaco has national sales and distribution capabilities, our sales office and warehouse is located in Brisbane. Large inventory holdings enable fast-track dispatch of stock orders. This combined with an easy to use online ordering system makes the delivery of stocked products simple, fast and reliable.

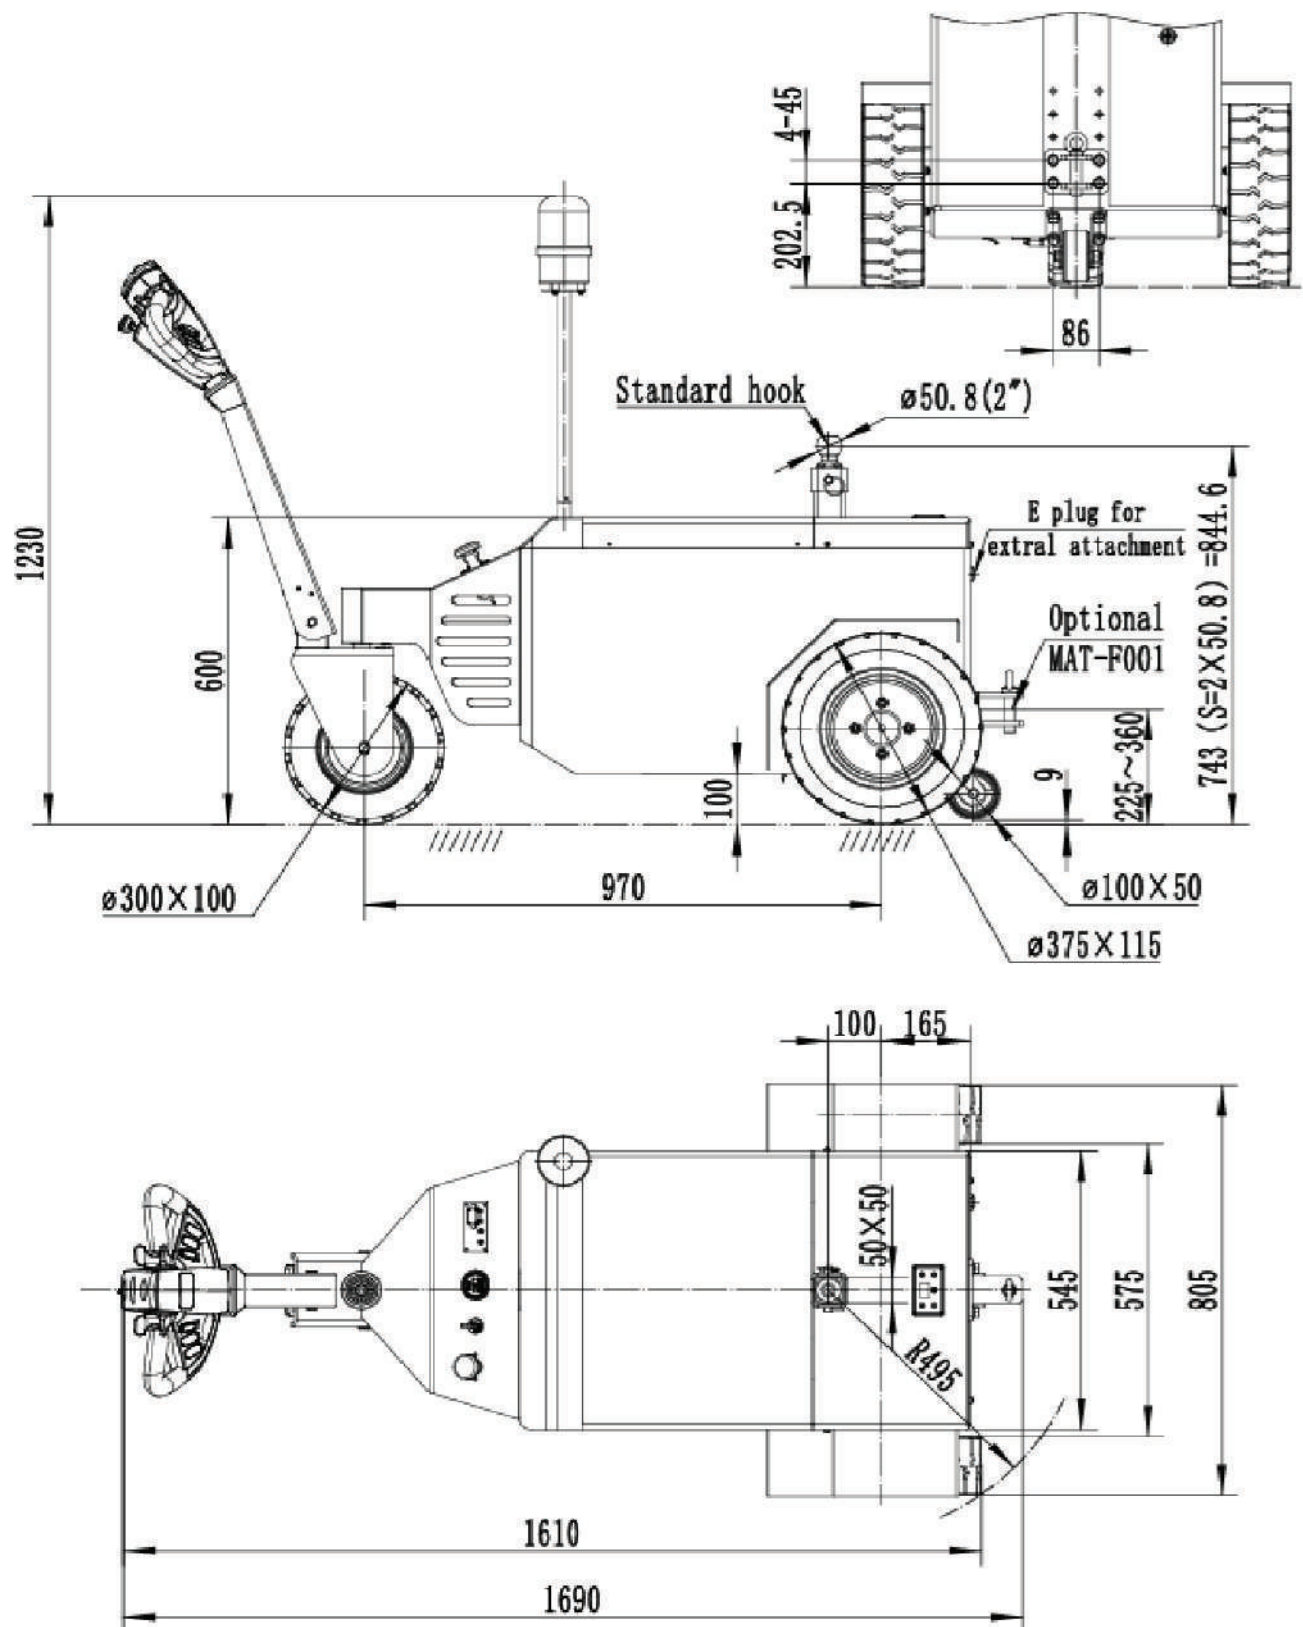

Specification:

1. Traction Cap. 3500kg
2. Drive bridge: DC24V/1500W
3. Battery: 2*12V/120Ah
4. Charger: 24V/15A
5. Traction speed: 0-3.5km/h



Model: KMT-T35F