

# Tenso® TS-702Y

Mercury Side-Seal Automatic  
Strapping Machine

#60436



**Downward  
Tension Force**

**Strap Guide  
Access**

**Auto Strap  
Ejector**

**LCD  
Display**

The Mercury Side-Seal Automatic Strapping Machine TS-702Y is a high-speed solution featuring a Mercury strapping head and advanced brushless DC motor technology. Designed for versatility, it is suitable for various industries, including household appliances, furniture, tiles, and logistics. With its high-capacity performance, it seamlessly integrates into automated production lines, ensuring efficiency and reliability.


## Features

- Robust and compact strapping head
- Control panel with LCD display
- Free access to strap guides (patents registered)
- Inner strap dispenser design
- Downward tension force
- Auto strap ejector
- Strap end ejector
- Sensor controlled heater
- Roller table included



## Highlights

- **Various Applications** – Suitable for different kinds of packages
- **Auto Strap Ejector** – Clears unwanted strap automatically if accidentally activated without package
- **Control Panel with LCD Display** – The LCD display shows the machine condition for easy operation and maintenance
- **Downward Tension Force** – The downward force is applied while ejecting and tensioning the straps to ensure a firm and secure hold on packages. This controlled pressure enhances stability, preventing movement or loosening during transport.
- **Inner Strap Dispenser** – Making coil change in the most convenient and labour-saving way
- **Dual Press Bar (Optional)** – Idea to strap compressible materials or telescoped boxes
- **Free access to Strap Guides** – Quick Access to the strap guide without tools. The most maintenance-friendly design

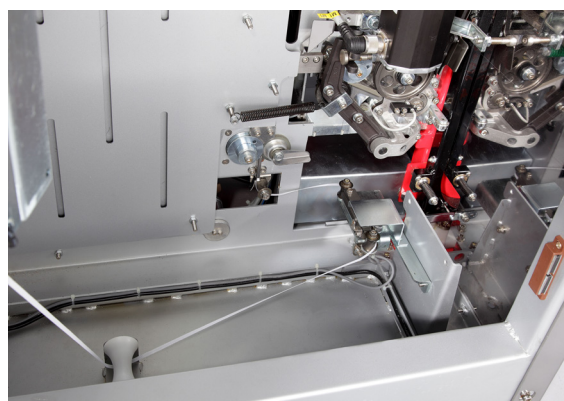

## Options

- Light tower with low strap sensor
- Small package
- End of cycle and strapping error signals
- Dual Press Bar

## Specifications

<b>Strap Type</b>	PP STRAP
<b>Capacity</b>	60 cycles per minute
<b>Strap Width</b>	5mm, 6 mm, 9 mm, or 12 mm
<b>Tension Range</b>	1 - 32 kg (for 5 mm, 6 mm, and 9 mm) 1 - 45 kg (for 12 mm)
<b>Weight</b>	294 kg
<b>Electrical Requirements</b>	110V, 220V, 230V, 240V 50/60Hz 1PH
<b>Certification</b>	TUV CE CERTIFIED



See me in action!

**Tenso® TS-702Y**