




Powder-coated exterior over a corrosion-resistant stainless steel type-316 base material to provide protection from the elements.

- Corrosion-resistant base material provides the ultimate protection from the elements.
- Heavy-gauge construction with tamper-resistant screws that resist stains and corrosion.
- Vandal-resistant bubblers feature chrome-plated integral hood guard to prevent contamination from other users, airborne deposits and tampering.
- Laminar flow provides clean fill with minimal splash.
- Pet fountain features slow drainage for easy drinking.
- Freeze-resistant options available.
- Available in 12 stunning finishes.
- Ideal for outdoor use.

Power	No Electrical Required
Finish	Beige, Black, Blue, Brown, Evergreen, Gray Orange, Purple, Terracotta, White, Yellow
Features	316 Stainless Laminar Flow Heavy Duty Vandal Resistant Pet Fountain
Chilling capacity	Non-refrigerated
Bubbler style	Vandal Resistant
Mounting	Floor Mount/Freestanding
Compliance	ADA & ICC A117.1 ASME A112.19.3/CSA B45.4 Buy American Act GreenSpec NSF 372 (lead free) NSF 61
Product dimensions	L: 660mm W: 787mm H: 1626mm
Shipping dimensions	L: 1181mm W: 724mm H: 832mm
Approximate Shipping weight	83kg
Installation location	Outdoor

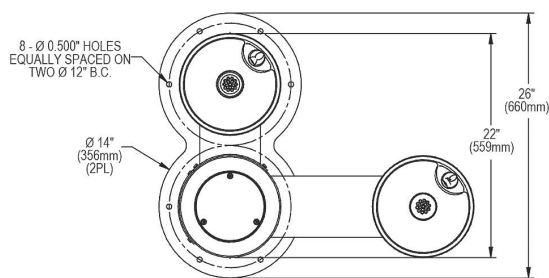

Technical drawing showing three side elevations of a water meter assembly with various dimensions in inches and millimeters.

Left Elevation:

- Top width: Ø 10" (254mm)
- Top height: 29" (737mm)
- Access panel height: 14-9/16" (371mm)
- Access panel width: 64" (1626mm)
- Access panel depth: 30" (762mm)
- Access panel width (bottom): 8-9/16" (167mm)
- Access panel depth (bottom): 8" (203mm)
- Access panel label: A

Middle Elevation:

- Top width: Ø 10" (254mm)
- Top height: 29" (737mm)
- Access panel height: 14-9/16" (371mm)
- Access panel width: 64" (1626mm)
- Access panel depth: 30" (762mm)
- Access panel width (bottom): 8-9/16" (167mm)
- Access panel depth (bottom): 8" (203mm)
- Access panel label: A

Right Elevation:

- Top width: Ø 10" (254mm)
- Top height: 29" (737mm)
- Access panel height: 14-9/16" (371mm)
- Access panel width: 64" (1626mm)
- Access panel depth: 30" (762mm)
- Access panel width (bottom): 8-9/16" (167mm)
- Access panel depth (bottom): 8" (203mm)
- Access panel label: A

Dimensions and Labels:

- Ø 10" (254mm)
- 29" (737mm)
- 14-9/16" (371mm)
- 64" (1626mm)
- 30" (762mm)
- 8-9/16" (167mm)
- 8" (203mm)
- 44" (1118mm)
- 19" (483mm)
- 34-11/16" (881mm) ORIFICE HEIGHT
- 33-5/16" (847mm)
- 27" (686mm)
- 1-1/2" DRAIN (38mm)
- Ø 10" (254mm)

Legend:

- A = 3/8" O.D. Unplated copper tube connect. Shut off valve by others.
- B = Access panel (8" x 10").
- C = Removable bottom cover.

Note: * ADA Requirement

Front & Side view