

Preliminary
US

MHL 420



127 hp



46,076 - 48,281 lbs



up to 49'3"



FUCHS

A TEREX BRAND

TECHNICAL SPECIFICATIONS

OPERATING WEIGHT WITHOUT ATTACHMENT		
MHL420	46,076 - 48,281 lbs	
Diesel engine		
	EU Stage V / US Tier 4	EU Stage IIIA / US Tier 3**
Manufacturer and model	Deutz TCD 3.6 L04	Deutz TCD 3.6 L04
Design	4-cylinder in-line engine	4-cylinder in-line engine
Operation	4-stroke diesel, common rail direct injection, turbocharger with charge air cooling, regulated exhaust gas recirculation, diesel particle filter with continuous regeneration and SCR catalytic converter	4-stroke diesel, common rail direct injection, turbocharger with charge air cooling
Engine rating	127 hp	127 hp
Rated speed	1850 rpm	1850 rpm
Displacement	220 cui	220 cui
Cooling system	Water and charge air cooling with demand driven, temperature-dependent fan drive and reversible fan	Water and charge air cooling with demand driven, temperature-dependent fan drive and reversible fan
Emission standard	EU Stage V / US Tier 4 / China 4	EU Stage IIIA / US Tier 3*
Fuel tank (Diesel)	73 gal	73 gal
Urea Tank (AdBlue)	5,3 gal	—
Electrical system		
Alternator	28 V / 100 A	28 V / 100 A
Operating voltage	24 V	
Battery	2 × 12 V / 105 Ah / 750 A (according to EN)	
Lighting system	2 × LED floodlights at the front of the machine, rear parking lights and indicator lights, 2 × LED working lights on cab	
Travel drive		
Hydrostatic travel drive via infinitely variable axial piston motor with directly mounted travel brake valve, two-speed manual gearshift, 4-wheel drive		
Traveling speed 1st gear	max. 3.1 mph	
Traveling speed 2nd gear	max. 11.8 mph	
Turning radius (all-wheel steering)	14'9"	
Slewing drive		
Slewing ring	Internally geared, double-row ball turning ring, greasing via automatic lubrication system	
Drive	2-stage planetary gear with integrated multi-disc brake	
Uppercarriage rotation speed	0–8 rpm	
Swivel lock	Electrically activated	

**for low-regulated markets

TECHNICAL SPECIFICATIONS

Undercarriage		
Front axle	Planetary drive axle with integrated, low-maintenance drum brake, rigidly mounted	
Rear axle	Oscillating planetary drive axle with integrated, low-maintenance drum brake and selectable oscillating lock	
Outrigger	4-point stabilizers, individually operated 2-point stabilizers and support blade, individually operated	
Tires	Forestry tires 600/50 - 22.5	
Brakes		
Service brake	Hydraulic braking system acting on all four wheel pairs	
Parking brake	Electrically operated spring-loaded drum brake at transmission, acting on both front and rear axle	
Hydraulic system		
Axial piston variable displacement pump	With load sensing, coupled with a load-independent flow distribution, allows simultaneous independent control of all work functions.	
Max. Flow rate	81 gpm	
Max. Working pressure	4641 / 5221 psi	
Hydraulic oil tank	72 gal	
Filtration	Flow-optimized return filter, integrated in the oil tank. Filter fineness defined at a beta value β(10) = 200 guarantees 99.5% separation of dirt particles with 10 µm. Very good separation values are already achieved with particle sizes of 3 µm. Generously dimensioned for long operating times.	
Cooling system	Separated high-performance cooler with demand driven, temperature-dependent fan drive and reversible fa	
Cab		
Cab	Infinitely variable hydraulic height-adjustable cabin with sliding door. Reinforced steel structure, soundproofed, heat-insulated panoramic windows for best all-round visibility, front window with roller blind, glass panel in the cabin roof with sliding blind. Heating and air conditioning, separate heat exchangers, fresh and recirculated air filters. Multifunction touch display, bottle holder, paper clip and multiple storage and mounting options. Digital radio (DAB+, USB, Bluetooth and hands-free), USB charging station 5V. Infinitely variable hydraulic height-adjustment with eye level up to 5.3 m above ground	
Air-conditioning system	Automatic air-conditioning. Hot water heating with variable temperature control and 8-speed fan, 8 adjustable air nozzles, 3 defroster nozzles	
Operator's seat	Air-cushioned comfort seat with swinging armrests / joysticks, safety belt, lumbar support and headrest. Enables fatigue-free work due to universal adjustment options for the seat position, seat inclination and the arrangement of the seat cushion in relation to the armrests and joysticks..	
Monitoring	Ergonomically arranged, glare-free multifunction display, multifunction display, automatic monitoring and storage of deviating operating states (including all hydraulic oil filters, hydraulic oil temperature, coolant and charge air temperature, loading of diesel particulate filter, steering), visual and acoustic warning systems. Diagnostic option for the individual sensors via the multifunction display. Rear view and side view camera on the right with separate monitor.	
Sound level	EU Stage V / US Tier 4	EU Stage IIIA / US Tier 3*
	Sound power level (outdoor)	Sound power level (outdoor)
	^{LWA} 97.7 dB(A) (measured) according to directive 2000/14/EC	^{LWA} 99.3 dB(A) (measured) according to directive 2000/14/EC
	^{LWA} 99 dB(A) (guaranteed) according to directive 2000/14/EC	^{LWA} 100 dB(A) (guaranteed) according to directive 2000/14/EC
	Sound pressure level (inside the cabin) according to ISO 6396 standard	Sound pressure level (inside the cabin) according to ISO 6396 standard
Vibrations	^{LpA} 72 dB(A)	^{LpA} 69 dB(A)
	Weighted r.m.s. value of acceleration of upper limbs is below 2.5 m/s² (98 in/s²)	
	Weighted r.m.s. value of acceleration for seat area and feet is below 0.5 m/s² (20 in/s²)	
Certification in accordance with CE guidelines		
Voluntary DGUV type examination		

EQUIPMENT

Diesel engine	Standard	Option
Direct electronic fuel injection / common rail	●	
ECO and Power Mode	●	
Water and charge air cooler	●	
DEF injection, passive regeneration	●	
Advanced automatic idling with engine shutdown function	●	
Engine diagnostic interface	●	
Temperature-controlled fan drive	●	
Engine preheating		●
Undercarriage		
All-wheel drive	●	
All-wheel steering	●	
Low maintenance drum brakes	●	
Rear axle oscillating lock	●	
2-speed powershift transmission		●
2-speed manual transmission	●	
4-point stabilizers	●	
Dozer blade in addition to the 4-point stabilizers		●
2-point stabilizers and support blade		●
Stabilizer cylinders with integrated two-way check valves	●	
Piston rod protection on stabilizer cylinders	●	
Protection guard for drivetrain		●
Tool box	●	
Special paint (customer paint work)		●
Forestry tires 600/50 - 22.5	●	
Uppercarriage		
Separated high-performance cooling system for engine, hydraulics and air-conditioning system	●	
Adjustable reversing fan	●	
Automatic central lubrication system	●	
Rear view camera	●	
2 x side cameras on the right	●	
Service platform	●	
2 rotating beacons on the counterweight		●
Electric refuelling pump		●
Light protection		●
Cab		
Vertically adjustable cabin	●	
Tilttable cab up to 30°		●
Single-pane safety glass (ESG)	●	
Polycarbonate safety screens (front & roof)		●
Sliding window in cab door	●	

EQUIPMENT

Cab	Standard	Option
Cabin with penetration resistant glass front and top (classification P5A)		●
Cabin with bullet-proof glass (classification P8B)		●
Windshield washer system(front windshield)	●	
Washing device for roof window		●
Enlarged roof window	●	
Air-cushioned operator seat with headrest, seatbelt and lumbar support	●	
Seat heating		●
Joystick steering		●
Steering column, height and tilt adjustable	●	
Automatic air conditioning	●	
Auxiliary heating		●
Multifunction display	●	
Bottle holder with cooler	●	
Document net	●	
Protective front and roof guard		●
Voltage converter 12 V		●
Digital radio (DAB+, USB, Bluetooth and hands-free)	●	
12V socket / cigarette lighter		●
Fire extinguisher, dry powder		●
Travel alarm w/ rotating beacons		●
Other equipment		
Close proximity range limiter for dipperstick	●	
Coolant and hydraulic oil level monitoring system	●	
Filter system for attachments		●
Pressure switch 3626/ 4641 psi for attachments	●	
Rupture valves for lifting cylinders		●
Active cyclone prefilter		●
Preheating of hydraulic oil		●
Lubrication of the grab suspension by central lubrication system		●
Basic LED light packages		●
Power LED light packages		●
Basic LED working lights cabin roof front	●	
Basic LED head lights at the front of the machine	●	
Boom cylinder damping system (piston accumulator)		●
Lift cylinder protection		●
Paint color according to customer's request		●
Sample expert report for application road homologation		●
Fuchs Connect telematics system, including 5-year license	●	

CAB

- Fuchs comfort cab
- Tilttable cab up to 30°*
- Large panoramic roof for optimal overhead visibility
- Polycarbonate safety screens *
- Wiper arms and motors out of the field of view
- Automatic climate control

ATTACHMENTS & LOADING EQUIPMENT

- Telescopic stick with a maximum reach up to 49'3"
- Robust loading equipment designed for heavy-duty applications in the timber industry and tree care applications
- Hydraulic preparation for various forestry attachments

UNDERCARRIAGE

- Specially developed for heavy-duty forestry and tree care applications
- Individually controllable extended outrigger, enlarged support plates
- Powerful travel drive
- Forestry tires

Various undercarriage variants:

- 4-point stabilizers
- 2-point stabilizers & parallel guided support plate*

FUCHS SERVICE PLATFORM

- Unique on the market
- Easily accessible, spacious service platform
- Convenient access to engine compartment, main control block, central lubrication system, air filter, tanks, and much more.
- Maintenance work can be completed quickly, safely and comfortably

DRIVE

Diesel engine

- Low emissions thanks to state-of-the-art EU Stage 5 exhaust gas cleaning system
- ROW solutions
- Best in class fuel consumption
- Exhaust system incl. DPFs are optimally protected against mechanical damage

UPPERCARRIAGE

- High-performance cooling systems, with physically separated coolers for water, charge air, hydraulic oil and air conditioning
- Thermostatically controlled cooler
- Highly efficient mobile hydraulics
- Rear view and side camera
- 2 x side cameras on the right



* optionally available



GREAT FEATURES COME STANDARD WITH YOUR FUCHS



ENLARGED SKYLIGHT



EXTENDED OUTRIGGERS



ALL-WHEEL STEERING



FUCHS SERVICE PLATFORM





2 X SIDE CAMERAS ON THE RIGHT



ENLARGED SUPPORT PLATES



SPECIAL OPTIONS – FOR TREE CARE APPLICATIONS

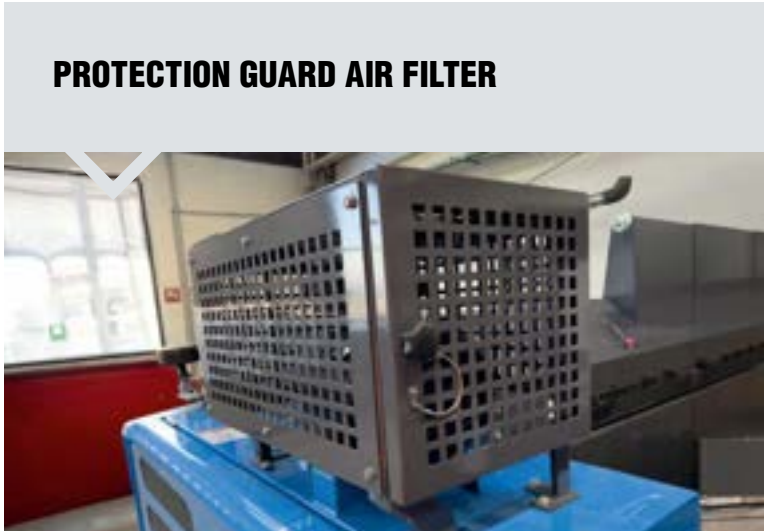
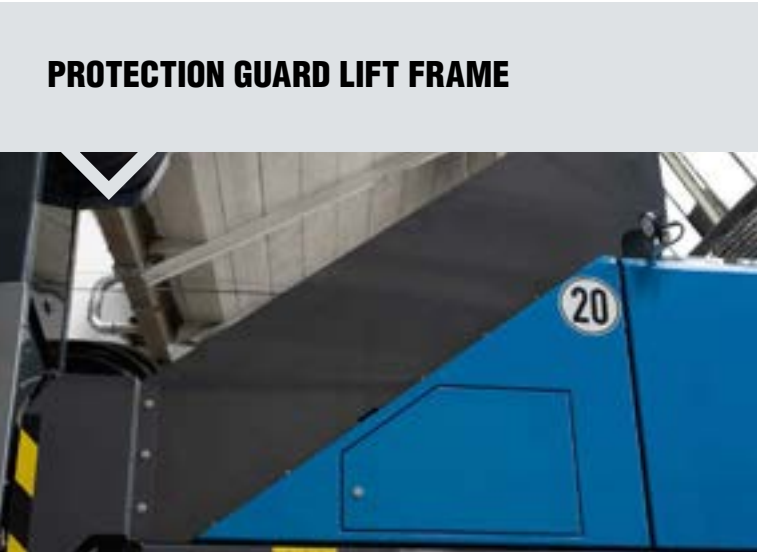


TECHNICAL DIMENSIONS

4-point stabilizers

Side view




all dimensions

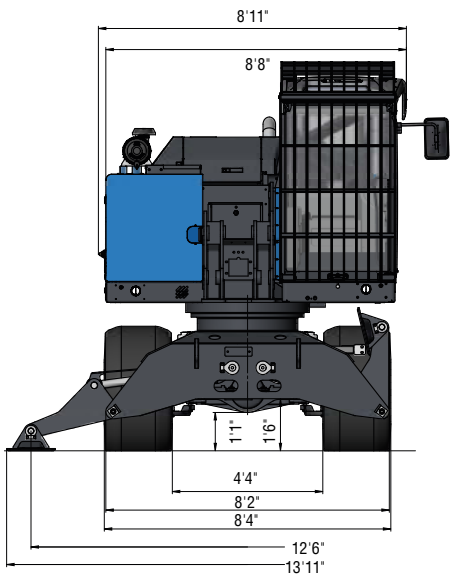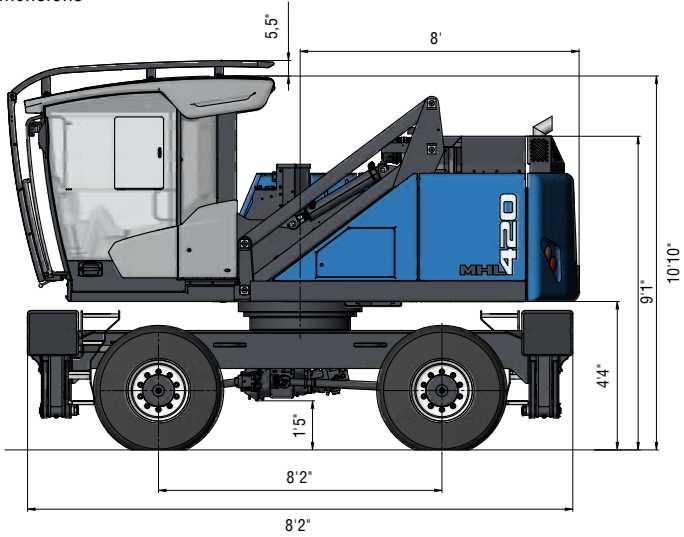

2-point stabilizers and support plate

Side view

all dimensions

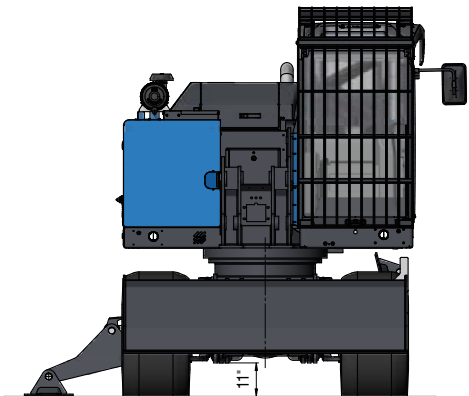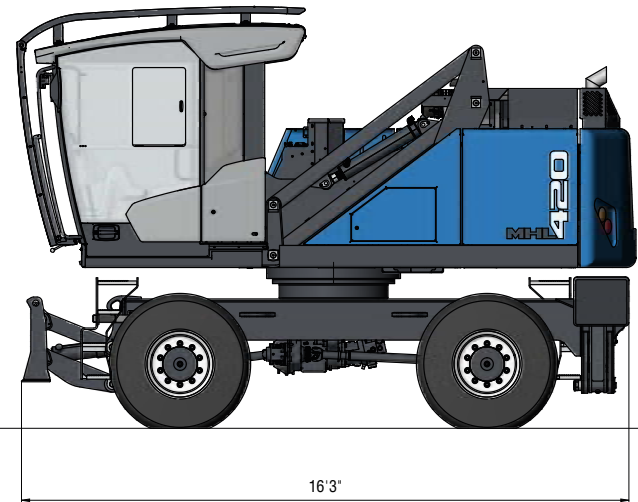


Support blade in addition to 2-point stabilizers

TRANSPORT DIMENSIONS

Side view


all dimensions

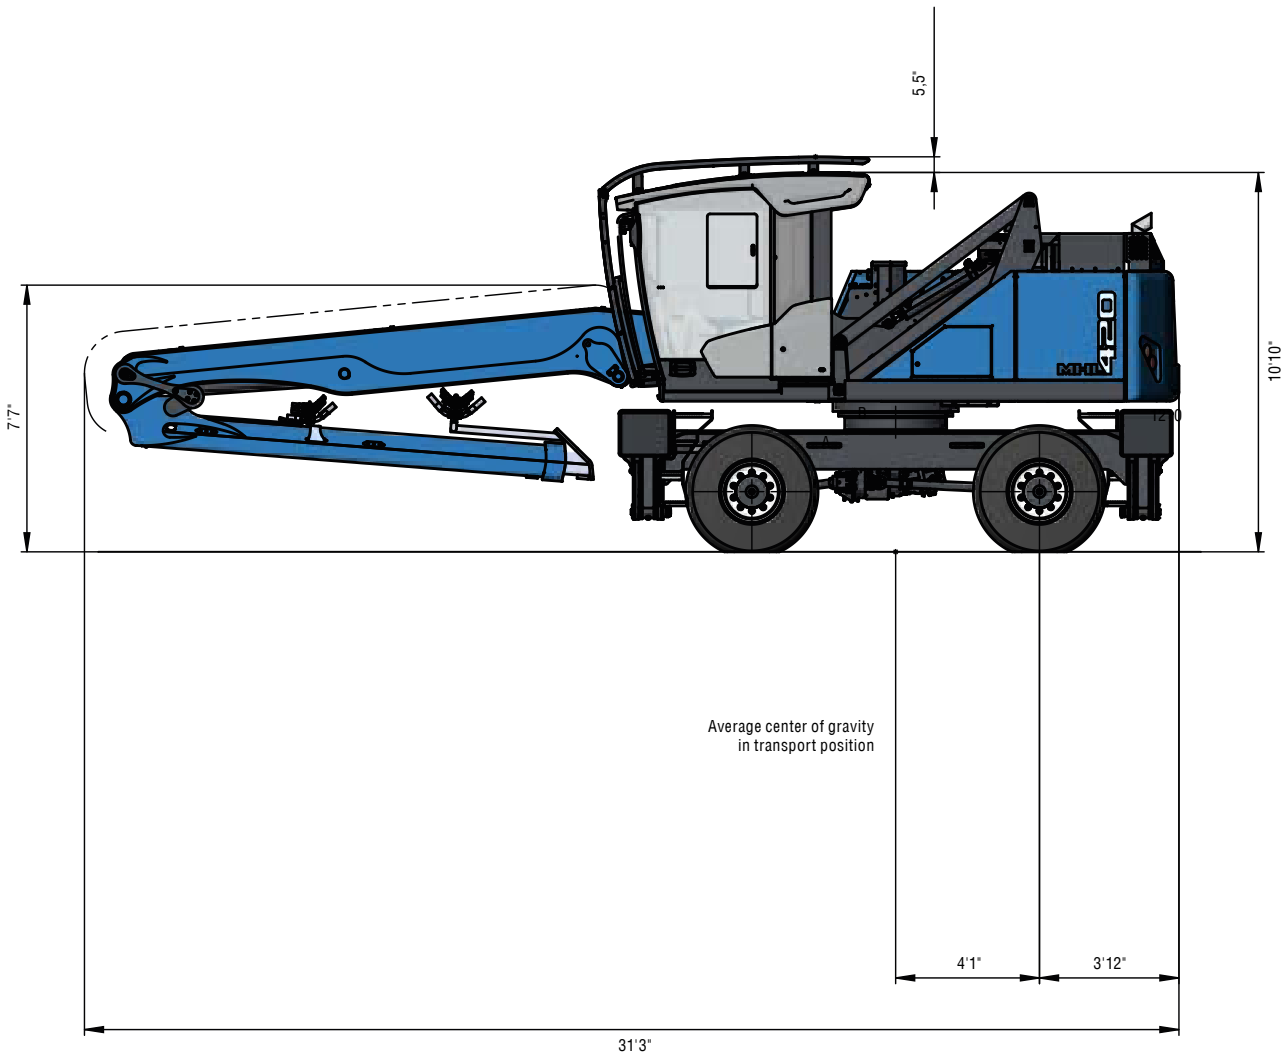

REACH





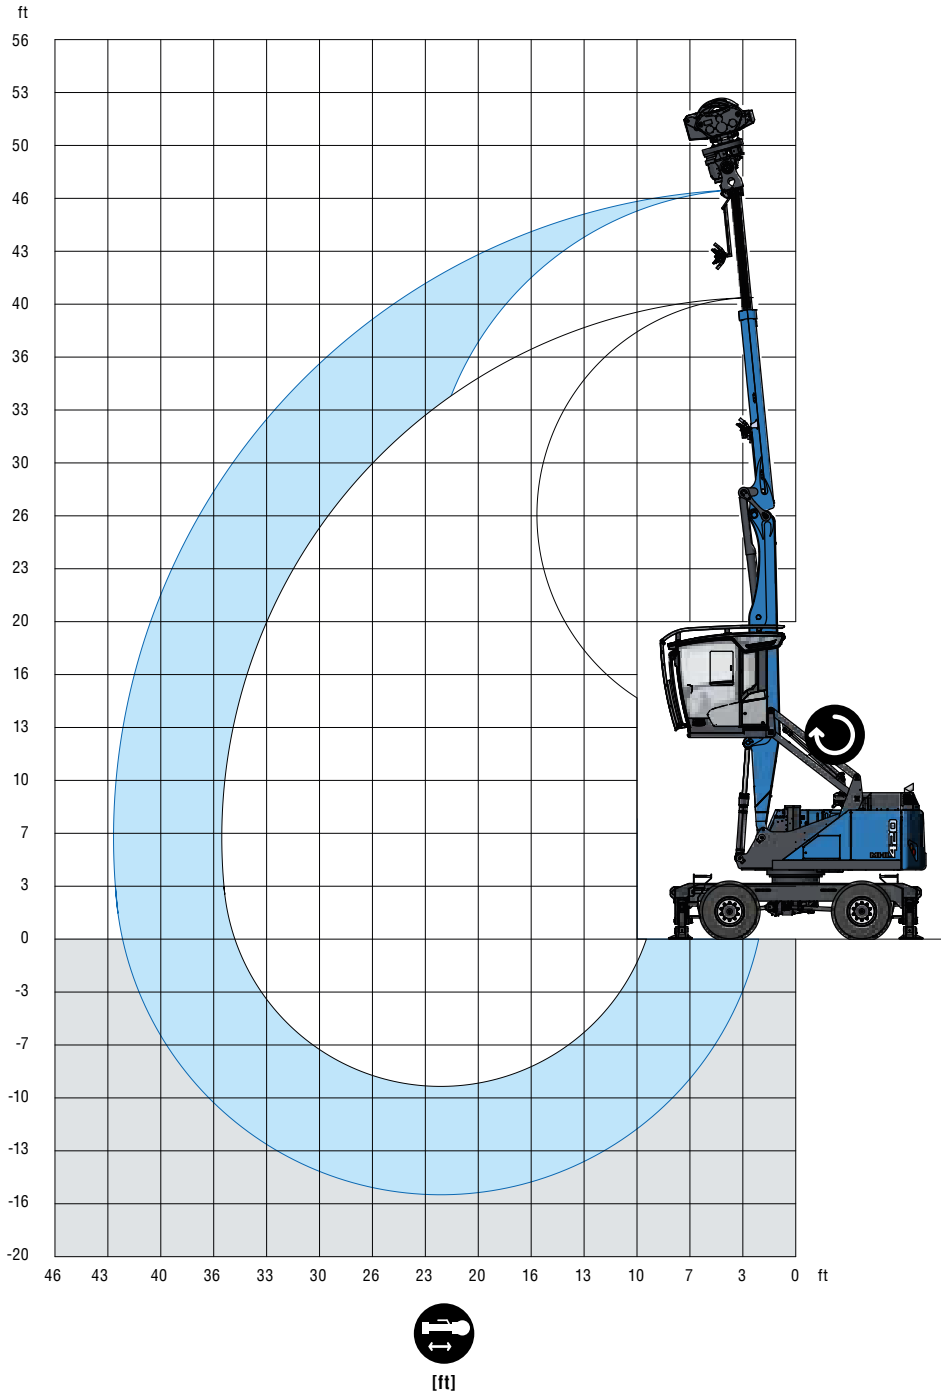












up to 49'3" with telescopic stick

Boom: 20' - Telescopic stick: 13'9"/ 20'4" - Grapple saw



LIFTING CAPACITY

Loading equipment: boom 20', telescopic stick 13'8" / 20'3"

							
height ft	Undercarriage Outrigger	Reach in ft					
		15	20	25	30	35	40
45		13,000° 13,000°					
40			7,400° 7,400°	8,100° 8,100°			
35				6,300° 6,300°	6,300° 6,300°		
30				6,200° 6,200°	5,800° 5,800°	5,900° 5,900°	
25				6,500° 6,500°	6,000° 6,000°	5,500° 5,500°	
20				7,100° 7,100°	6,500° 6,500°	5,700° 5,700°	5,200° 5,200°
15			8,000° 8,000°	8,100° 8,100°	7,400° 7,400°	6,300° 6,300°	5,300° 5,200
10		9,700° 9,700°	10,600° 10,600°	10,000° 10,000°	8,700° 8,100	7,100° 6,400	5,600° 5,200
5		19,100° 19,100°	13,900° 13,900°	11,000° 10,200	8,900° 7,800	7,300° 6,200	5,700° 5,100
0		20,300° 20,300°	14,300° 13,500	11,000° 9,800	8,700° 7,600	6,900° 6,100	5,000° 5,000°
-5		15,600° 15,600°	13,600° 12,900	10,400° 9,500	8,000° 7,400	6,100° 6,000	3,700° 3,700°
-10		12,800° 12,800°	11,700° 11,700°	8,900° 8,900°	6,700° 6,700°	4,600° 4,600°	
-15			8,500° 8,500°	6,500° 6,500°			
max. reach 42'2"							
6							4,400° 4,400°

Recommended attachments on request

- Height
- Reach
- Center of rotation
- 4-point supported
- 2-point supported with blade

The lift capacity values are stated in imperial pounds (lbs) and are valid on the end of the extended telescope stage without attachment. The figures represent 75% of the static tipping load or 87% of the hydraulic lifting force, in accordance with ISO 10567 (marked *). On firm, level ground the values apply to a swing range of 360°. The weights of the attached hoisting equipment (grab, load hook, etc.) must be deducted from the carrying capacity values. The safe working load of the hoisting equipment must be observed. In accordance with EU Standard EN 474-5, hose rupture safety devices on the lift and dipperstick cylinders, an overload warning device, and a table of carrying capacity in the cab are required for hoisting. Hoisting should only be performed when the machine's outriggers are up.



www.terex-fuchs.com

March 2025. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. © Terex Corporation 2025 - Terex, the Terex Crown design, Fuchs and Works For You are trademarks of Terex Corporation or its subsidiaries.

Fuchs USA | 11001 Electron Drive | Louisville, KY 40299 | USA | Phone: +1 502 640 6001 | sales.fuchsus@terex.com

