

# Winglock Swing



**BOON EDAM**

**The focus of this single wing access gate lies in elegant aesthetics for all levels of visitors. Easy on the eye meets easy installation, operation and culminates in an elevated user experience. Bi-directional traffic is effortlessly managed with the intuitive design and features which have been crafted into this sleek model. A substantially reduced footprint means this graceful gate can optimise the available floor space – with affordable elegance.**

#### **Options**

- External control panel
- Stainless Steel and Black edition
- Card reader mounting option

 *your entry experts*




## Dimensions and Specifications

A	B	C	D	E				
Passage Width (mm)	Capacity / Minute*	# of Door Wings	Disabled Access	Type of Traffic	Overall Width (mm)	Door Wing Width (mm)	Door Wing Height (mm)	Overall Height (mm)
915	30	1			958	845	940** / 980	1035

\* Depending on access control system, in one direction

\*\* To match with the Speedlane Swing

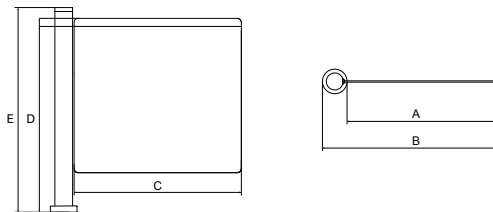

## Access Control Integration

All Boon Edam secured entry solutions can easily be integrated with virtually any access control system. Card readers, fingerprint readers or other authorisation systems can be mounted upon an optional secondary pedestal or column that can be placed in the vicinity of the gate itself. This allows for a more fluid entry process.

## Emergency Egress

The Winglock Swing is fail-safe: in case of emergency the lock and motor will disengage allowing free passage. If back-up power is available it is also possible to ensure the Winglock Swing will automatically open in the exit direction. (Escape route requirements are subject to local regulations).

## BoonTouch

Boon Edam offers a universal control panel to operate its security access solutions remotely from a reception or security desk. This control panel is able to operate any combination of up to 6 security access solutions and is compatible with most of the solutions in our product range. Its user friendly interface allows for each solution to be operated separately or all at the same time. Moreover the BoonTouch will show any alarm situation at the lane directly at the reception or security desk.

## Technical Specifications

Power Supply: 200-240 VAC, 50/60 Hz

### Power Consumption

Operating: 20W

Stationary: 9W

Ambient Temperature: -20°C to +50°C

Weight: 48kg