

MAJOR

- UP TO 300% POWERED PRE-STRETCH—ONE METRE IN FOUR METRES OUT
- TURNTABLE HOME POSITION
- SLOW START AND STOP
- CHOICE OF AUTOMATION/MANUAL MODES
- ADJUSTABLE TOP AND BOTTOM WRAP COUNTS
- ADJUSTABLE TENSION/TURNTABLE AND CARRIAGE SPEEDS
- 180 DEGREE ROTATING CONTRAL BOX
- TROUBLESHOOTING SHOWN ON SCREEN
- MANUAL REINFORCING WRAPPING
- SAFETY SWITCH TO PREVENT FOOT PINCH
- HEIGHT DETECTION BY PHOTOEYE SENSOR
- ADVANCED SOFT WRAPPING
- ONE WAY IDLE ROLLER TO PREVENT WRAPPING TAIL FROM GOING BACK INTO MACHINE AFTER FILM BREAK
- TOUCH SCREEN/PLC CONTROL

SPECIFICATIONS

- STANDARD MAX WRAPPING HEIGHT : 2MTR
- MAXIMUM TURNTABLE WRAPPING SPEED: 12RPM
- MAXIMUM LOADING WEIGHT: 2000KG
- STANDARD TURNTABLE DIAMETRE: 1600MM
- POWER SUPPLY: 240V, 50Hz
- POWER CONSUMPTION: 1.2KW
- AIR CONSUMPTION: 19L/MIN, 6KG

OPTIONS


- WRAP HEIGHT: 2.5, 3.0 MTRS
- LOADING RAMP



▲ No-Thread Film Carriage



▲ Pre-stretch Ratio Selection

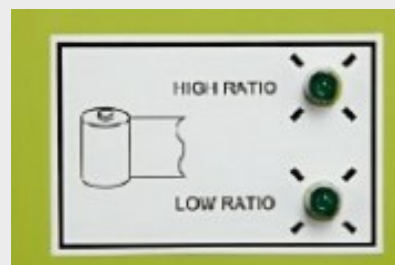

▲ Film Tail Pin Punch



▲ Control Panel

