



Milano 230 Commercial LED downlight



Introducing the Milano commercial LED downlight range. With quality and performance in mind, the Milano commercial LED downlight family offers a wide range of sizes, wattages, beam optics, colours and specifications

Application

Designed completely in house, this IP54 LED downlight is suited to a wide range of applications: Commercial facilities, office areas, hospital wards and corridors, foyers and retail applications.

[CLICK HERE: Learn more about the vandalproof model](#)

Design Specifications

- 230mm Ø Light weight die-cast aluminium body for efficient heat dissipation
- High output CREE SMD LED chips, L90 > 50,000 hours, CRI 90 and 4000K as standard with white trim
- Excellent glare control with set back optical design, 60° beam optic as standard
- Tridonic remote constant current non-dimmable LED driver as standard
- Quick release mounting clips for easy installation or maintenance

Available Options

- Remote Tridonic DALI dimmable driver
- Black, silver trim
- Tuneable white - POA
- 3500K - POA
- Cyanosis COI compliant - POA





Model No. & Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Diameter (mm)
DML232140NWH	Recessed LED downlight 230mm non dimmable	240	21	2103	4000	90	230mm
DML232540NWH	Recessed LED downlight 230mm non dimmable	240	25	2504	4000	90	230mm
DML232940NWH	Recessed LED downlight 230mm non dimmable	240	29	2905	4000	90	230mm
DML233440NWH	Recessed LED downlight 230mm non dimmable	240	34	3405	4000	90	230mm
DML234040NWH	Recessed LED downlight 230mm non dimmable	240	40	4006	4000	90	230mm

Code Methodology: **DML23** = Size | **40** = Wattage | **40** = CCT | **N** = Dimming Type | **WH** = Trim colour

Variants Available:

Wattage - **21** / **25** / **29** / **34** / **40**

CCT - **30** = 3000K / **40** = 4000K / **CY** = Cyanosis

Dimming type - **N** = Non Dim / **D** = DALI

Trim Colour - **WH** = White / **BK** = Black / **SL** = Silver




Due to continued product and technology enhancements, data sourced from salcommercial.net.au shall not form part of any contract and or performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Commercial Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish.



Dimensions

Milano-230-led-commercial-downlight-single-line-drawing

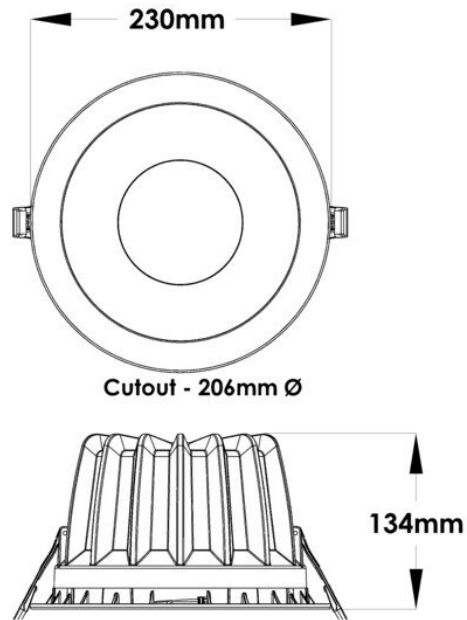

Milano 230mm (DML23)




Photometric Data

Milano 230mm polar curve - Commercial LED downlight


Milano 230

60° beam

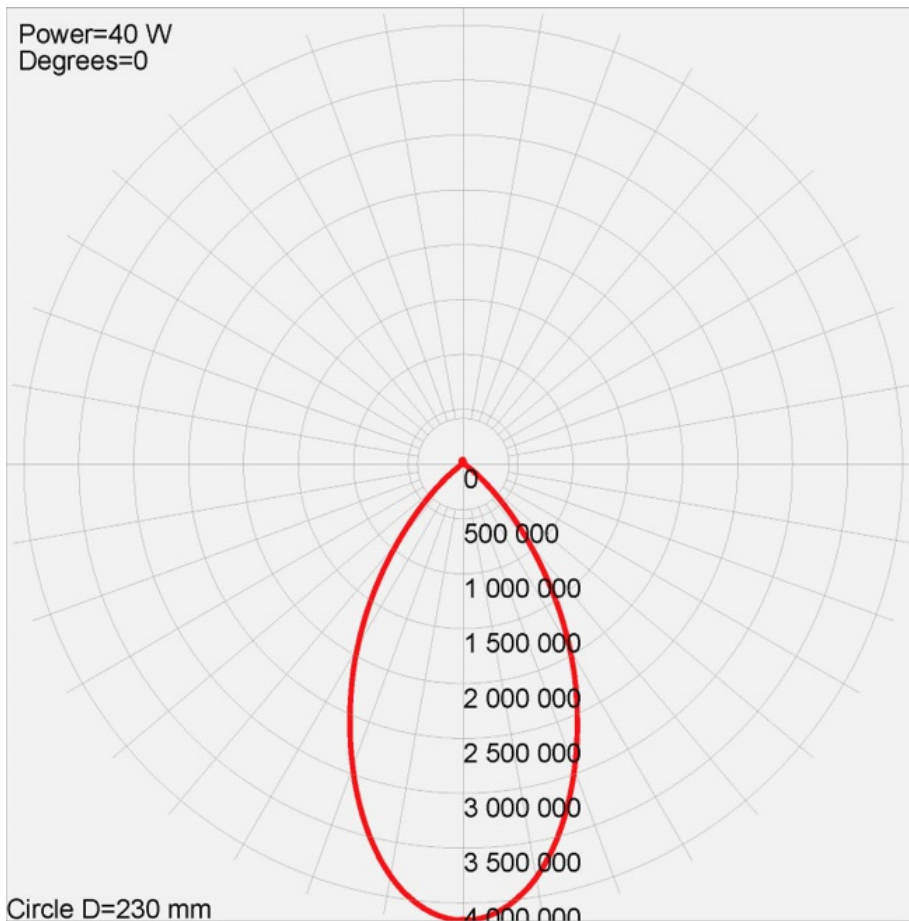

Product Images

Milano 230mm top view - Commercial LED downlight

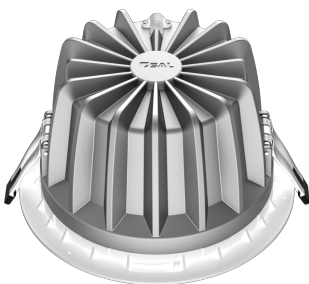

Milano downlight trim options - Commercial LED downlight

