




Bucher CityFlex C40

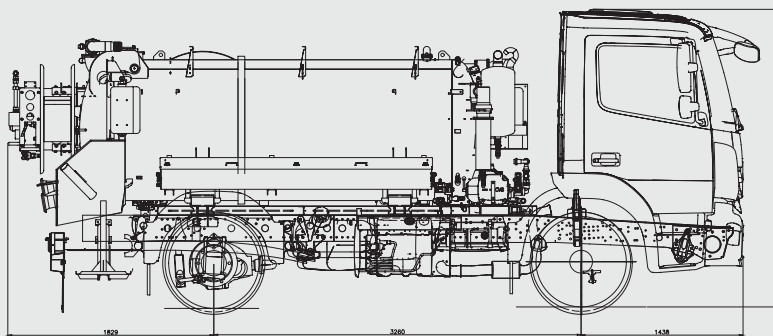

C40 Classic

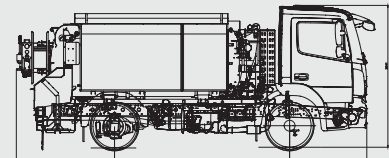

C40 Comfort

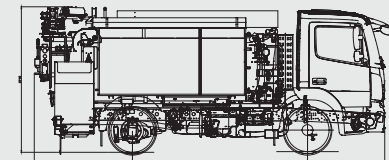

C40 Premium

Dimensions and weight

Length	257 in (6,527 mm)
Width	94 in (2,400 mm)
Height	104-106 in (2,641-2,710 mm)
Wheelbase	128 in (3,260 mm)
GVW	29,762 lb (13,500 kg)
TARE weight	Approx. 14,550 to 17,416 lb (6,600 to 7,900 kg)

Transmission

Power take-off	From gearbox
Jetting pump	Hydraulic driven
Vacuum pump	Hydraulic driven

Engine

Type	M1K
Horse power	231 HP
Emission level	Euro 6
Fuel	Diesel


Chassis

MB Atego	1323K 4x2
Cab type	S-Cab
Mudguards	Plastic
Cyclist protection	One on each side
Protective grilles	On rear lights

Finish

Undercarriage and components	Grey
Cabin/Tank	White
Cabinets and shelves	Aluminium
Paint	Corrosion class C3
Tank: 200-300 µm.	Rest: 100-120 µm
Text and stripping	Invoiced separately

For all small-scale jetting and vacuum tasks in densely populated areas




Controls

Intuitive operation thanks to the control panel and remote control.



Suction cassette (Premium)

Enjoy the practical suction hose w. telescope extension up to 2 m.



Added equipment

Converter & inverter (Premium) for electric gear such as CCTV.



Storage

Special solutions w. light & heat (Premium) keep gear safely stored.

Bucher CityFlex C40

Technical specifications

		C40 Classic	C40 Comfort	C40 Premium
Tank	• Volume	879 UK gal (4 m ³)	879 UK gal (4 m ³)	879 UK gal (4 m ³)
	• Operating pressure	7 psi (0.5 bar)	7 psi (0.5 bar)	7 psi (0.5 bar)
	• Movable partition, hydraulic	✓	✓	✓
	• Suction valves	Top 3" pneumatic / Bottom 4" manual	Top 3" pneumatic / Bottom 4" manual	Top 3" pneumatic / Bottom 4" manual
	• Tank level indicators	✓	✓	✓
High pressure system	• Water filling valve	2", Inst. fire coupling BS336	2", Inst. fire coupling BS336	2", Storz
	• Pump model	Uraca P3-10	Uraca P3-10	Uraca P3-10
	• Pump capacity	28 UK gpm (127 l/min) @ 2,320 psi (160 bar)	28 UK gpm (127 l/min) @ 2,320 psi (160 bar)	28 UK gpm (127 l/min) @ 2,320 psi (160 bar)
	• Hose reel, hydraulic	¾" 164 ft (50 m) + ½" 196 ft (60 m)	¾" 492 ft (150 m)	¾" 492 ft (150 m)
Vacuum system	• Pump model	CVS RSL 400	CVS RSL 400	CVS RSL 400
	• Pump capacity @ free flow	1,264 UK gpm (5,750 l/min)	1,264 UK gpm (5,750 l/min)	1,264 UK gpm (5,750 l/min)
	• Suction cassette hose	÷	÷	3" with 7 ft (2 m) extension
	• Transport reel hose	3" 131 ft (40 m) split in 3 sizes	3" 131 ft (40 m) split in 3 sizes	3" 131 ft (40 m) split in 3 sizes
Controls	• Panel / Remote control	1 pcs. / 1 pcs.	1 pcs. / 1 pcs.	1 pcs. / 1 pcs.
Lights	• Work lamps, LED	4 pcs.	4 pcs.	6 pcs.
	• Flash lights, LED	÷	÷	10 pcs.
	• Beacons, LED	3 pcs.	3 pcs.	4 pcs.
Storage	• Cabinets, drawers, trays	3 pcs. cabinets	5 pcs. cabinets	5 pcs. cabinets, 3 pcs. drawers, 1 pcs. tray
	• Shelves, open box	2 pcs. shelves	÷	1 pcs. open box
	• Special storage	1 pcs. cone holder	1x cone holder, 3x3" pipes, 3x fence	1x cone holder, 3x3" pipes, 3x fence
Others	• Frost protection	÷	÷	2 kW oil burner
	• Hand wash facility	✓	✓	✓
Accessories	• Nozzle set	1/2"	3/4"	1/2"
	• Hose w. couplings	1 x 6 ft (1.75 m) 4" hose	1 x 6 ft (1.75 m) 4" hose	1 x 6 ft (1.75 m) 4" hose
	• Adaptor pieces	3" TW to 3" and 4" Bauer	3" TW to 3" and 4" Bauer	3" TW to 3" and 4" Bauer
	• Cassette suction pipe	÷	÷	3"
	• Cover hooks set	✓	✓	✓
	• Detachable vice	✓	✓	✓
	• End cover safety support	✓	✓	✓
	• Converter for CCTV	24 V to 12 V	24 V to 12 V	24 V to 12 V
Added equipment	• 6 x 12 V supply	÷	÷	✓
	• Inverter for CCTV	÷	÷	24 V to 230 V 1600 W

Bucher Municipal Ltd

Curtis Road, Dorking
Surrey RH4 1XF, UK
Tel. +44 (0) 1306 884 722
Fax: +44 (0) 1306 884151

www.buchermunicipal.co.uk