

NRU-220S Series

NVIDIA® Jetson AGX Orin™ AI NVR for Intelligent Video Analytics

Preliminary

CE FC

Key Features

- Powered by NVIDIA® Jetson AGX Orin™ SoM bundled with JetPack 5.0.2
- 2x 2.5 Gigabit Ethernet + 4x IEEE 802.3at Gigabit PoE+ ports
- 2x front-accessible 2.5" HDD trays
- 1x M.2 2280 M key socket for NVMe SSD
- 2x mini-PCIe sockets for WiFi/ GNSS/ NVMe/ CAN modules
- 1x 3042/ 3052 M.2 B key socket for 4G/5G mobile communication
- 1x isolated RS-485 and 2x RS232 ports
- 8V to 48V wide-range DC input with built-in ignition power control

Contact Neousys

Get Quote

Introduction

NRU-220S series is a one-stop AI NVR real-time inference and video transcoder powered by NVIDIA Jetson AGX Orin. Its fanless design and wide-temperature operation capability makes it ideal for stationary or mobile deployment applications.

Powered by NVIDIA® Jetson AGX Orin™ 32GB/ 64GB system-on-module (SOM), it comprises an Ampere GPU with up to 2048 CUDA cores, 64 Tensor cores, 2x NVDLA 2.0 Engines that offer a total of 275 sparse TOPS (INT8) AI inference and video transcoding capability of up to twenty-two 1080P video streams simultaneously.

NRU-220S offers four 802.3at PoE+ ports sharing 1 Gigabit bandwidth; each port can supply up to 25.5W of power to IP cameras. The additional two 2.5GbE ports is ideal for surveillance applications requiring more IP camera connections, or higher bandwidth connections to the backend. In addition to 64GB eMMC on the Orin module and an M.2 2280 NVMe socket for fast SSD read/write, NRU-220S is equipped with two front-accessible 2.5" SSD trays for storage expansion. It also has two mini-PCIe sockets for CAN/ COM/ WiFi modules and one M.2 B key socket for 4G LTE/5G NR mobile communications.

In addition to the above mentioned connectivity, the system also includes a wide range of NVIDIA AI tools, and modern deep learning frameworks. NRU-220S brings real-time video inference to the edge for surveillance, predictive maintenance, and intelligent transportation system (ITS) applications. Furthermore, with Neousys' unique damping bracket design, ignition power control, and 8-48V wide-range DC power input, NRU- 220S is also ideal for in-vehicle deployment. Last but not least, NRU-220S comes with a derivative model, NRU-222S, incorporating M12 connectors for applications in shock and vibration environments that require extreme rugged connections, such as for agriculture, construction, and mining machinery.

NRU-220S series is Neousys' response to edge AI performance demands in a compact form factor with fanless wide-temperature operation.


Specifications

	NRU-220S	NRU-222S		NRU-220S	NRU-222S
System Core			Storage		
Processor	Supporting NVIDIA® Jetson AGX Orin™ System-on-Module (SOM), comprising NVIDIA® Ampere GPU and Arm Cortex-A78AE CPU		SATA HDD	2x front-accessible 2.5" 7mm SSD	
Memory	32GB/ 64GB LPDDR5 (AGX Orin 32GB/ 64GB) @ 3200 MHz on SOM		M.2 NVMe	1x M.2 2280 M key NVMe socket (PCIe Gen4x2) for NVMe SSD	
eMMC	64GB eMMC 5.1 on SOM		Power Supply		
Panel I/O Interface			DC Input	1x 3-pin pluggable terminal block for 8V to 48V DC input and ignition power control (IGN/ GND/ V+)	1x M12 A-coded 5-pin for 8V to 48V DC input and ignition power control (IGN/ GND/ V+)
Ethernet Port	6x RJ45 with screw-lock	6x M12 X-coded 8-pin	Mechanical		
PoE Capability	IEEE 802.3at PoE+ PSE for Port 3 ~ Port 6, 100W total power budget		System LED	PWR: System carrier board power status OS: Jetson OS boot status IGN: Ignition power signal	
USB	1x USB 3.1 Gen1 port 2x USB 2.0 ports 1x USB Type C (Debug Only)		Dimension	230 mm (W) x 173 mm (D) x 66 mm (H)	
Video Port	1x DisplayPort, supporting 3840x2160 at 60Hz		Weight	TBD	
Serial Port	1x Isolated RS-485 port and 2x RS-232 ports		Mounting	Wall-mount with damping brackets	
CAN bus	2x CAN 2.0 port		Environmental		
Isolated DIO	4-CH isolated DI and 4-CH isolated DO		Operating Temperature	-25°C ~ 70°C with passive cooling (30W TDP mode) *	
Internal I/O Interface			Storage Temperature	-40°C ~ 85°C	
Mini PCI Express	1x full-size mini PCI Express socket (PCIe + USB 2.0) for WiFi 6 or CAN 1x full-size mini PCI Express socket (USB 2.0) for GNSS or 4G LTE		Humidity	10% ~ 90%, non-condensing	
M.2	1x M.2 3042/3052 B key (USB 3.1 Gen 1 + USB 2.0) for LTE/5G module with dual micro SIM support		Vibration	Operating, MIL-STD-810H, Method 514.8, Category 4 (pending)	
			Shock	Operating, MIL-STD-810H, Method 516.8, Procedure I (pending)	
			EMC	CE/ FCC Class A, according to EN 55032 & EN 55035 (pending) EN 50121-3 (EN 50155:2017, Clause 13.4.8) (pending)	

* For sub-zero and over 60°C operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.



Appearance

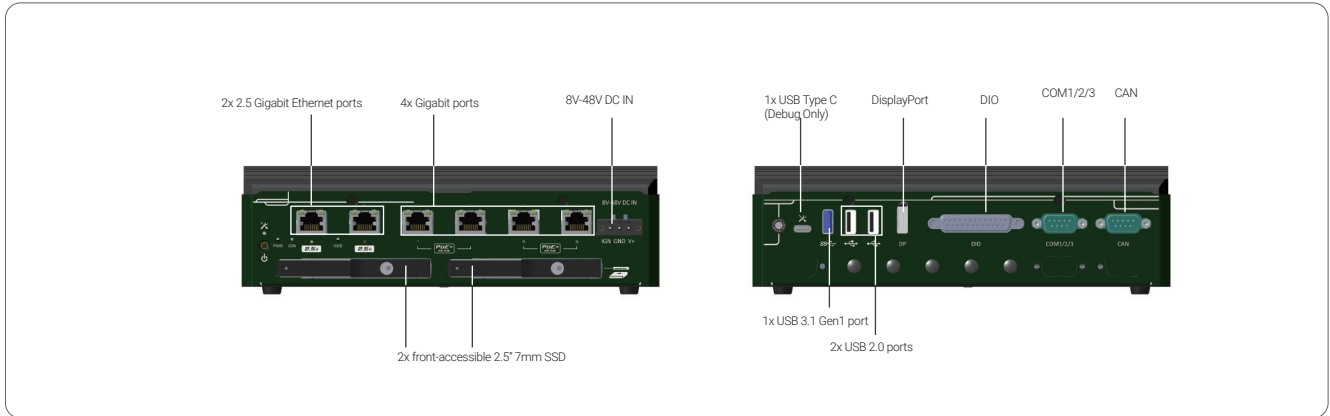

Dimensions



Ordering Information

Model No.	Product Description
NRU-220S	NVIDIA® Jetson AGX Orin™ AI NVR for Intelligent Video Analytics with RJ45 Ethernet
NRU-222S	NVIDIA® Jetson AGX Orin™ AI NVR for Intelligent Video Analytics with M12 Ethernet

Optional Accessories

PA-160W-OW	160W AC-DC power adapter 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C.
PA-120W-OW	120W AC/DC power adapter 20V/6A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C.
AccsyBx-FAN-NRU-100	Fan kit with 92mm x 92mm fan for NRU-220S series