Panda Flowpack WHEN VERSATILITY MEETS RELIABILITY

 Panda is a robust, reliable and versatile machine, with all the main characteristics and specifications to comply with the wide range demand of the market: an interaction of style and functionality.

Panda, the flowpack suitable to fit the high level of customization required, meeting all the needs of a huge variety of small and medium sizes food and non-food products up to a speed of 300 ppm.

100% made in Italy, Panda is the synthesis of more than 50 years of dedication, skills and competence, combining design, technology, reliability, flexibility and solidity.

Panda fits easily into a complete process flow, connecting with reliability the productive cycles to the logistic activities.

The variety of sealing concepts and configurations, attributes an effective response to the very different packaging needs, from the managing of fragile products, to the perishable and fresh products handling.












Bottom Seal

Rotating Sealing Jaws Head



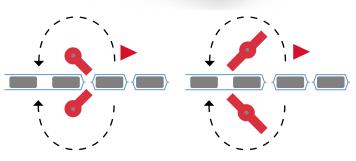

VERSATILITY



Panda, the solution to the several requirements of the market, for a wide range of food and non-food applications and perishable products.

Features:



HIGH SPEED : UP TP 300 PACKAGES PER MINUTE



LARGE VARIETY OF SEALING DEVICES



FOOD GRADE BASIC MATERIALS AND EASY TO SANITIZE DESIGN



FRIENDLY USER AND EASY MAINTENANCE



WIDE RANGE OF CUSTOMIZATIONS




PACKAGING OF SMALL AND MEDIUM SIZE PRODUCTS



Bottom Seal

Super Sealing Jaws Head

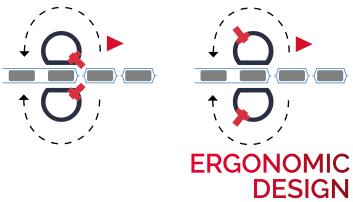

FLEXIBILITY



Panda design based on the concept of flexibility, from regular overwrap to MAP and FlowBag applications: one machine, different means of packaging.



Panda, for easy maintenance and easy cleaning for granting a high level of hygienic standards, essential condition for packaging environments of food products.






Bottom Seal Top Seal

Long Sealing Jaws Head

RELIABILITY AND ROBUSTNESS

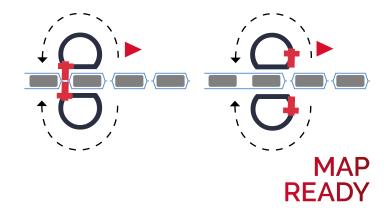



Experience and know how risen over more than 50 years, generated a reliable and solid flowpack, to grant high productive performances.



Panda allows extending life of perishable products through the Modified Atmosphere Packaging, replacing the residual 02 in the package, by flushing inhibitors and inert gasses.



FLOWBAG READY



Panda is available for FlowBag applications with benefit into the meat and cheese industries, assuring a higher degree of hygiene and automation process compared to manual bagging.



Since more than 50 years we design and manufacture in Italy packaging machines and automatic lines for food and non-food industries.

Reliability, functionality and efficiency are key elements of Record's machineries, with a high level of customization to meet the requirements of the demanding markets.


100% made in Italy, technologically up to date and durable over the time, the Record's HFFS can be equipped with a wide range of modular feeders, easy to be integrated in automatic process lines, from primary to the secondary packaging.

Established worldwide: present in any mainland with a large distributors network, Record has installations in any country, achieving customers loyalty through the built knowledge and by offering an high level qualified assistance.

RECORD



Thanks to the know how built through our long experience in the field, we can create complete solutions, integrating the entire packaging process involving the related productive activities and logistics, from distribution and packaging to the forming and closing.

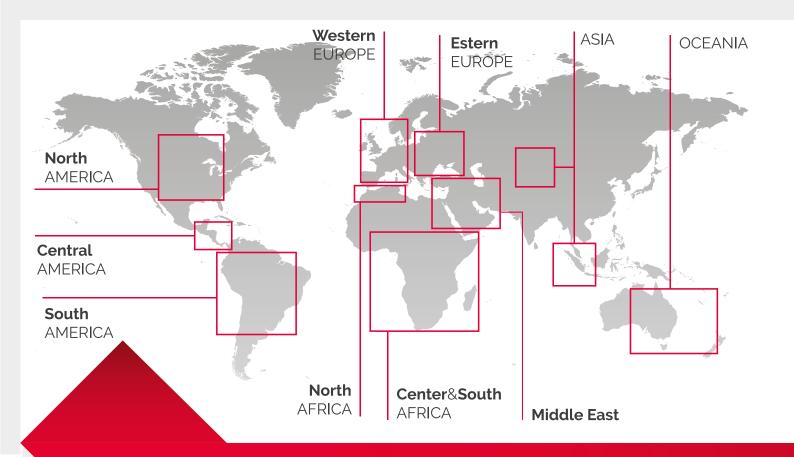

Sales and service NETWORK



RECORD SPA

Via Italia, 46

23846 - Garbagnate Monastero

Lecco - ITALY

Tel: +39 031.850607

Fax: +39 031 850704

Email: info@record.it

Web: www.record.it







A FLEXIBLE AND VERSATILE MULTIPURPOSE FLOWPACK MACHINE



| Panda BS | Rotating Sealing Jaws Head | | | | Long Sealing Jaws Head | Super Sealing Jaws Head | |
|--------------------|--|--|---------------------------------------|--|--|--|---------------------------------------|
| Bottom Seal | Medium | Large | High Speed | On Edge | Medium | Medium | High Speed |
| Machine speed MAX | 150 ppm | 120 ppm | 300 ppm | 130 ppm | 60 ppm | 120 ppm | 250 ppm |
| Product Dimensions | A = 650 mm B = 220 mm C = 160 mm | A = 650 mm B = 320 mm C = 180 mm | A = 300 mm B = 140 mm C = 80 mm | A = 300 mm B = 140 mm C = 110 mm | A = 750 mm B = 290 mm C = 160 mm | A = 650 mm B = 220 mm C = 110 mm | A = 300 mm B = 160 mm C = 80 mm |
| Film width MAX | 730 mm | 930 mm | 430 mm | 630 mm | 730mm | 730 mm | 430 mm |
| Cut-off Length MAX | 750 mm | 750 mm | 400 mm | 400 mm | 850 mm | 750 mm | 400 mm |
| Jaws width | 350 mm | 450 mm | 170 mm | 170/250 mm | 350 mm | 250/320 mm | 190 mm |
| Film Linear Speed | 50 m/min | 50 m/min | 50 m/min | 50 m/min | 30 m/min barrier shrinkable film and laminated | 50 m/min | 50 m/min |





| Panda TS | Long Sealing Jaws Head | | |
|-------------------------------|--------------------------------------|--|--|
| Top Seal | Large | | |
| Machine speed MAX | 60 ppm | | |
| Product Dimensions MAX | A = ∞ mm B = 350 mm C = 200 mm | | |
| Film width MAX | 930 mm | | |
| Cut-off Length _{MAX} | ÷∞ | | |
| Jaws width | 450 mm | | |
| Film Linear Speed | 30 m/min (barrier film) | | |

- Production output is subject to the film quality and product characteristics.
 Layout dimensions and technical data are indicative. We reserve the right to apply modifications at anytime

