



COMMERCIAL LAUNDRY SYSTEM

The Best Solution Commercial Laundry

- Stronger
- Smarter
- Healthier
- More Efficient

TITAN C WASHER



		Non-Heater	Heater
CYLINDER			
Drum Volume	cu.ft (ft)	5.2 (147)	5.2 (147)
Diameter	in. (mm)	24 (610.8)	24 (610.8)
Depth	in. (mm)	20.4 (518.1)	20.4 (518.1)
DIMENSIONS			
Product (WxHxD)	in	29 x 40.8 x 32	29 x 40.8 x 32
	mm	737 x 1,036 x 814	737 x 1,036 x 814
With Door Open	in. (mm)	53 (1,370)	53 (1,370)
Carton (WxHxD)	in	31 x 44.3 x 33.3	31 x 44.3 x 33.3
	mm	788 x 1,125 x 846	788 x 1,125 x 846
Weight (Product/Carton)	lb (kg)	221.8 (100.6) / 248 (112.5)	221.8 (100.6) / 248 (112.5)
SPEED⁰⁾			
Wash	RPM	46	46
Extract (High Speed)	RPM	1,000	1,000
G-force	G	342	342
RATING⁰⁾			
Electric Ratings	V/Hz/A	100-120 / 50 or 60 / 4.2-5 (Heating 8.5-9.0) ¹⁾	-
		220-240 / 50 or 60 / 2.1-2.3 (Heating 9.1-10) ¹⁾	220-240 / 50 or 60 / 13.3-17.5
*CONSUMPTION INDEX⁰⁾²⁾			
Water	gal (l)	18.5-22.5(70-85) ⁴⁾	18.5-21(70-80) ⁴⁾
Electricity	V/kW	100-120 / 0.5(Heating 0.85-1.0) ¹⁾ 220-240 / 0.5(Heating 2.0-2.4) ¹⁾	220-240 / 3.2-3.8
NOISE & CYCLE TIME			
Noise Level (Sound Power)	dB	62	62
Program Duration in Minutes (Default) ⁰⁾	min	36	59 (60°C Course)
SYSTEM & CONTROL			
Inverter Direct Drive Motor		0	0
Heating Element	V/W	100-120 / 1,000 ¹⁾	-
		220-240 / 2,000 ¹⁾	220-240 / 3200
Drain System		BLDC	BLDC
Emergency Stop Button		0 (OPL Only)	0 (OPL Only)
Auto Dosing Interface		0	0
Gyro Sensor		0	0
Damper		4 Friction Dampers	4 Friction Dampers
PROGRAMS⁰⁾			
Program List		Hot*	75°C
		Warm*	60°C
		Cold*	40°C/30°C
		Delicates*	Cold
		Add Super Wash (Card & Coin)/ 20 Custom PGM (OPL)	* Custom PGM ³⁾
EXTERNAL FINISH			
Drum		Stainless Steel	Stainless Steel
CIRCUIT PROTECTION			
PCB Fuse - Main Control Board	amps	12 (220-240V)	12 (220-240V)
PCB Fuse- Filter Assembly	amps	15	15

⁰⁾Dimensions and weights are approximate. ^{*}Design, features, and specifications subject to change without notice.

^{*}Some models may not be available for sale in certain countries. ^{*}Model name may vary by country

^{*}Energy Course available


⁰⁾This specification is different by countries. For the most accurate information, please refer to service manual.

1) Only for tub clean cycle using heater.

2) Based on DOE J2/J1 testing

3) When you press button for 3 seconds, Cold cycle will be changed to Custom PGM. (Cold for coin model, Custom PGM for OPL model)

4) Loads : IEC 6.5kg / Default water level (Non heater : high / Heater : Mid) ^{*}The water consumption can be different according to load and water level because our product measure the water level frequency.

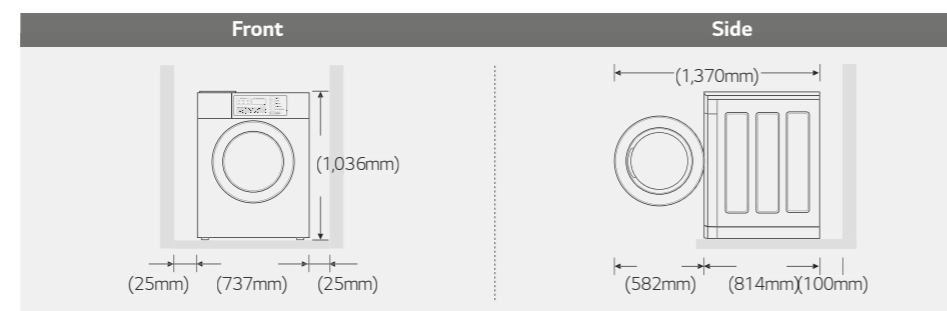

TITAN C DRYER



		Gas	Electricity
CYLINDER			
Drum Volume	cu.ft (ft)	9.0 (254)	9.0 (254)
Diameter	in. (mm)	28.2 (716)	28.2 (716)
Depth	in. (mm)	24.2 (614)	24.2 (614)
DIMENSIONS			
Product (WxHxD)	in	29 x 40.2 x 31.9	29 x 40.2 x 31.9
	mm	737 x 1,022 x 810	737 x 1,022 x 810
With Door Open	in. (mm)	53.2 (1,350)	53.2 (1,350)
Carton (WxHxD)	in	31.5 x 45.6 x 33.8	31.5 x 45.6 x 33.8
	mm	800 x 1158 x 858	800 x 1158 x 858
Weight (Product/Carton)	lb (kg)	150 (68.2) / 167.1 (75.8)	150 (68.2) / 167.1 (75.8)
RATING⁰⁾			
Electric Ratings	V/Hz/A	120/60/5	120 (240)/60/26
		220-240/50/2.4	220-240/50/22.5
		220/60/3	220/60/21
		-	240/50/19.5
CONSUMPTION INDEX⁰⁾			
Electricity	kW	0.35	4.5 ~ 5.4
SYSTEM & CONTROL			
Heating Type		Gas (LNG/LPG) ¹⁾	Electric
Type of Drying		Ventilation	Ventilation
Air Flow	CFM	210	210
Gas Ratings ⁰⁾	kW/BTU	7.4 / 25,000	-
Motor	kW	0.33	0.33
Program Duration in Minutes (Default) ⁰⁾	min	40	40
CONNECTIONS			
Air Outlet Diameter	in. (mm)	4 (100)	4 (100)
Exhaust Airflow Diameter	in. (mm)	4 (100)	4 (100)
PROGRAMS			
Program List		High Temp	High Temp
		Med Temp	Med Temp
		Low Temp	Low Temp
		No Heat	No Heat
EXTERNAL FINISH			
Drum		Stainless Steel	Stainless Steel

⁰⁾Dimensions and weights are approximate. ^{*}Design, features, and specifications subject to change without notice.

^{*}Some models may not be available for sale in certain countries. ^{*}Model name may vary by country

⁰⁾This specification is different by countries. For the most accurate information, please refer to service manual.

1) Gas type depends on country sales model.

Weather Hood Type	Number of 90° Elbows	Maximum length of 4" (10.2cm) diameter rigid metal duct	Maximum length of 4" (10.2cm) diameter flexible metal duct
Recommended	0	65 feet (19.8m)	45 feet (13.7m)
4" (10.2cm)	1	55 feet (16.8m)	35 feet (10.7m)
	2	47 feet (14.3m)	30 feet (9.1m)
	3	36 feet (11.0m)	25 feet (7.6m)
4" (10.2cm)	4	28 feet (8.5m)	20 feet (6.1m)
	Use Only for Short Run Installations	0	55 feet (16.8m)
2-1/2" (6.35cm)	1	47 feet (14.3m)	27 feet (8.2m)
	2	41 feet (12.5m)	21 feet (6.4m)
	3	30 feet (9.1m)	17 feet (5.2m)
	4	22 feet (6.7m)	15 feet (4.5m)

