



PRODUCT ADVANTAGES

- Easy-to-use electronic controls with 3 cycles - 75, 150 & 180 seconds
- Digital temperature gauges
- Suitable for all dish & glass washing applications. Useable chamber height of 440mm. Able to wash 1/1 GN pans when using optional open ended tray racks
- Low 2.3 litres per cycle rinse volume dish / glasswasher
- Fully enclosed 4 sided hood design - avoiding loss of energy / steam
- Optimum hygienic - deep drawn tank with coved corners (no welds) and SELF-CLEANING CYCLE
- Polypropylene wash and stainless steel rinse arm with patented WIDE ANGLE FAN nozzle to maximise wash & rinse performance
- Wash pump inlet strainer to ensure machine reliability
- Includes chemical dispensers, fill hose, power lead / plug & pump-out drain for quick & easy installation
- Includes 1 x plate rack & 1 x cutlery holder
- WATERMARK approved
- NOT SUITABLE FOR USE WITH REVERSE OSMOSIS SYSTEMS
- MADE IN GERMANY

TECHNICAL DATA

| | |
|---|---------------------------------------|
| Wash tank temperature | 55 - 65°C |
| Rinse water temperature (booster tank) | Minimum 82°C |
| Low temp cut-out (thermostop) activated | Yes |
| Cycle times | 1. 75sec. 2. 150sec. 3. 180sec. |
| Water consumption | 2.3 litres |
| Tank capacity | 21 litres |
| Tank heating | 2.5 kW |
| Power supply | 240/50/1 - 15 A |
| Booster loading | 2.6 kW |
| Total loading | 3.2 kW |
| Pump capacity | 0.4 kW |
| Loading height | 440 mm |
| Bench to bench - internal dimension | 628 mm |

*Thermostop guarantees required temperatures with cold water, the actual cycle times extend accordingly.


For corner operation we recommend to make the right side of the machine accessible for service.

For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or a HOBART HYDROLINE water treatment system.


INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058

DIMENSIONAL DRAWING

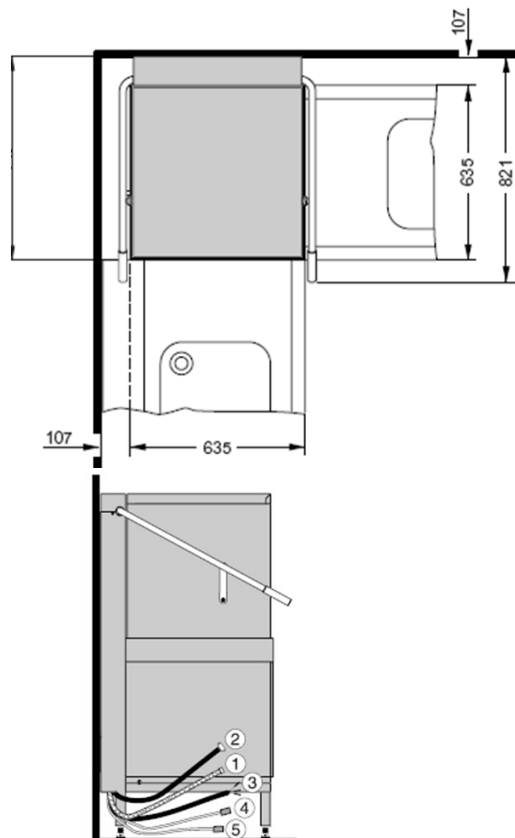

| | | |
|---|--|----------------|
| A | | ø 50 mm dia |
| B | | ø 3/4" ss hose |
| C | | 240/50/1 |

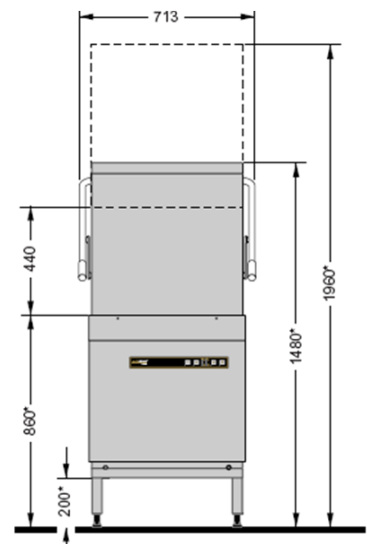

CONNECTIONS

| | |
|-------------------------------|-----------------------------|
| ① Drain hose | 2,000 mm ID 20 / OD 25 |
| ② Supply hose | 2,000 mm R 3/4" |
| Required flow rate | 5 l/min |
| Flow pressure | 2.0 - 6 bar (200 to 600kPa) |
| Max. supply water temperature | 60 °C |
| ③ Power cord | 2,500 mm |
| Supply hose for | |
| ④ Detergent | 2,000 mm |
| ⑤ Rinse aid | 2,000 mm |