

HIGH-SPIN HYGIENIC BARRIER WASHER-EXTRACTORS

1H180 18KG 1H240 24KG 1H280 28KG

FEATURES

- · Freestanding, high spin
- · Complete stainless steel cabinet
- · Stainless steel drum and tub
- · Aries Elite Fully programmable
- · Patented soap hopper
- · Large drain valve (Ø 76 mm)
- Easy access to all important parts from all sides
- · Large door opening for easy loading & unloading
- · Automatic door positioning
- · Liquid soap connection

OPTIONS

- · USB plug (on the side panel)
- · Liquid soap pumps
- · Water recovery option incl. second drain valve
- · Steam heating version
- · Water sample tap
- · Aries Assist
- Second display
- · Weighing system





SmartWAVe automatically determines the absorption ability of the load at the start of the cycle, resulting in optimized water levels throughout the cycle.
















			T	
	IH180	IH240	IH280	
DRUM				
CAPACITY 10:1 (KG)	18	24	28	
CAPACITY 9:1 (KG)	20	27	31	
VOLUME (L)	180	240	280	
DRUM DIAMETER (MM)	750	750	750	
NUMBER OF DRUMS	1	1	1	
NUMBER OF LOADING DOORS	1	1	1	
NUMBER OF UNLOADING DOORS	1	1	1	
DRUM SPEED				
WASH SPEED (RPM)	42	42	42	
EXTRACTION SPEED (RPM)	939	939	914	
G-FACTOR	370	370	350	
PROGRAMMER				
ARIES ELITE	standard	standard	standard	
CABINET				
STAINLESS STEEL	standard	standard	standard	
HEATING				
ELECTRICAL (KW)	12/18	18	21,9	
STEAM (BAR)	3-8	3-8 3-8		
CONNECTIONS				
ELECTRICAL	STD: (C)380-415/50/60/3 OPT-NC: (Q)200-240/50/60/3 - (X)200-240/50/60/1 (only available for boiler fed and steam heating) - (P)380-415/50/60/3-(N)440-480/50/60/3			
WATER INLET (MM)	STD: 3 x 3/4" OPT-NC : 2 x 3/4"	STD: 3 x 3/4" STD: 3 x 3/4" OPT-NC: 2 x 3/4" OPT-NC: 2 x 3/4"		
STEAM INLET (MM)	13 (1/2")	13 (1/2")	13 (1/2")	
TRANSPORT DATA				
GROSS WEIGHT (KG)	485	515 550		
NET WEIGHT (KG)	430	460	460 490	
DIMENSIONS H x W x D (MM)	1610 x 1010 x 1235	1610 x 1310 x 1235	1610 x 1240 x 1235	

	А	В	С	D		F
IH180	900	1145	1455	655	1423	850
IH240	1020	1145	1455	675	1423	970
IH280	1130	1145	1455	670	1423	1080
	width	depth	height			

IH180	325	376	
IH240	325	496	
IH280	325	496	
	height	width	

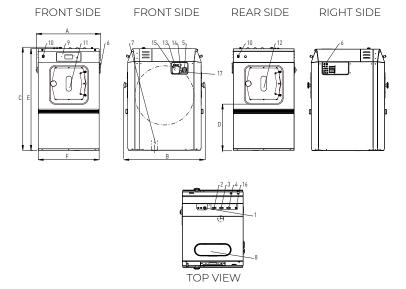

- 1 Electrical connection
- Hot water
- Cold water hard
- Cold water soft
- Main switch
- 6 Liquid soap connection
- Drain
- Soap dispenser
- 9 Control panel
- 10 Button CENTRALSTOP
- 11 Loading door
- 12 Unloading door
- 14 USB port
- 15 Electrical connection to liquid soap pumps
- 16 Steam supply
- 17 Aries Assist connection

