

OPERATOR'S MANUAL


INCLUDING: OPERATION, INSTRUCTION, INSTALLATION, MAINTENANCE AND PARTSBOOK




IMPORTANT: READ THIS MANUAL CAREFULLY BEFORE INSTALLING, OPERATING OR SERVICING THIS TOOL.

HYDRAULIC HOCK CUTTER AND DEHORNER "HC-3"



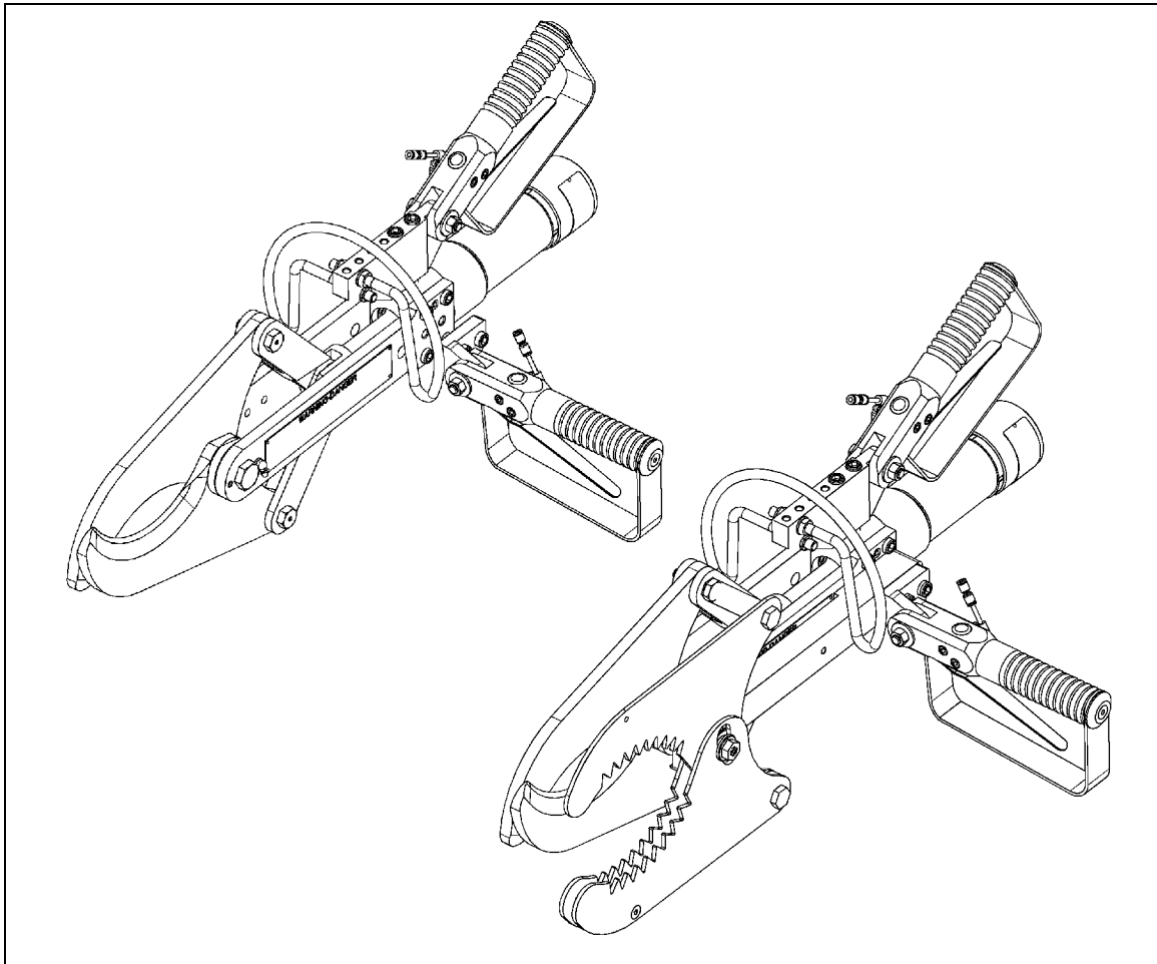









TOOL DATA

MODEL: HC-3
ASSEMBLY No: 6540100
TYPE: AIR/HYDRAULIC OPERATED
NET WEIGHT: 40 LBS (18 KG)
HYDRAULIC PRESSURE: 2000 P.S.I. MAXIMUM
INLET AIR PRESSURE: 90 P.S.I. (6-7) BARS



| | |
|--|---|
|  WARNING | = Hazards or unsafe practices which could result in severe personal injury, death or substantial property damage. |
|  CAUTION | = Hazards or unsafe practices which could result in minor personal injury, product or property damage. |
|  NOTICE | = Important installation, operation or maintenance information. |

OPERATING AND SAFETY INSTRUCTIONS

-  **WARNING** DO NOT OPERATE THIS TOOL UNTIL YOU HAVE READ AND UNDERSTOOD THE SAFETY INSTRUCTIONS AND OPERATING MANUALS.
-  **WARNING** DO NOT OPERATE THIS TOOL UNTIL YOU HAVE RECEIVED TRAINING IN THE HANDLING, OPERATION AND USE OF THIS TOOL.
-  **WARNING** STOP USING A MALFUNCTIONING OR DEFECTIVE TOOL IMMEDIATELY. REPORT ANY PROBLEMS OR DEFECTS TO YOUR SUPERVISOR FOR REMOVAL OF THE TOOL FROM SERVICE.
-  **WARNING** DO NOT ATTEMPT TO REPAIR THE TOOL YOURSELF.
-  **WARNING** DO NOT ALLOW UNAUTHORIZED PERSONS TO USE TOOL.
-  **WARNING** REMOVE AND DISCONNECT POWER FROM THE TOOL WHEN TOOL IS LEFT UNATTENDED OR IS NOT IN USE.
-  **WARNING** NEVER TIE DOWN, BYPASS, ALTER OR MODIFY THE ACTIVATING SWITCHES OR TRIGGERS OF THIS TOOL.
-  **WARNING** NEVER MAKE ALTERATIONS OR MODIFICATIONS TO THIS TOOL.
-  **WARNING** BE CONSTANTLY AWARE AND ALERT FOR UNSAFE CONDITIONS AND REPORT THEM IMMEDIATELY TO YOUR SUPERVISOR.
-  **WARNING** NEVER PLACE YOUR HAND OR ANY PART OF YOUR BODY IN THE CUTTING PATH OF THE TOOL.
-  **WARNING** NEVER ALLOW ANYONE ELSE TO PLACE THEIR HANDS OR ANY PART OF THEIR BODY IN THE CUTTING PATH OF THE TOOL.
-  **WARNING** DO NOT ACTIVATE CONTROL SWITCHES OR TRIGGERS OF THIS TOOL UNLESS YOU INTEND TO TEST OR OPERATE THIS TOOL.
-  **WARNING** DO NOT USE THIS TOOL FOR ANY PURPOSE OTHER THAN IT'S INTENDED PURPOSE.
-  **CAUTION** WHEN OPERATING THIS TOOL WEAR THE PROTECTIVE GEAR AND SAFETY EQUIPMENT SUPPLIED TO YOU.
-  **WARNING** THE NOISE EMISSION (SOUND PRESSURE LEVEL) AT THE WORKSTATION MAY EXCEED 80 dB (A). EAR AND SOUND PROTECTION GEAR IS REQUIRED.

OPERATING INSTRUCTIONS

⚠ WARNING ONLY TRAINED PERSONNEL ARE TO OPERATE THIS TOOL.

1. TO ENSURE TOOL IS OPERATING PROPERLY, PERFORM FOLLOWING STEPS AT START OF EACH SHIFT:
 - MAKE SURE TOOL MOVES UP AND DOWN FREELY WHILE HANGING FROM BALANCER OVERHEAD.
 - WITH POWER TO TOOL TURNED ON, TEST TRIGGER FOR PROPER OPERATION.
 - DEPRESS EACH TRIGGER SEPARATELY. TOOL SHOULD NOT ACTIVATE. DEPRESS BOTH TRIGGERS. TOOL SHOULD ACTIVATE.
 - IF TOOL HAS "ANTI-TIE DOWN" OPTION, BOTH TRIGGERS MUST BE DEPRESSED SIMULTANEOUSLY FOR TOOL TO ACTIVATE.
2. TO PERFORM WORK, HOLD TOOL FIRMLY AT BOTH HANDLES. SQUEEZE TRIGGERS TO ACTIVATE TOOL.
3. POSITION TOOL AND PERFORM CUTTING OPERATION.


MAINTENANCE

⚠ WARNING ONLY TRAINED AND QUALIFIED PERSONNEL ARE TO PERFORM MAINTENANCE AND SERVICE TO THIS TOOL.

1. MAKE ALL NECESSARY LINE CONNECTIONS TO THE TOOL.
2. AN AIR FILTER-REGULATOR-LUBRICATOR (PART NO. 7200030) MUST BE INSTALLED IN AIR SUPPLY FOR EACH TOOL.
3. FILL LUBRICATOR WITH KENTMASTER AIR MIST OIL (PART NO. 7903050). SET DRIP RATE ACCORDING TO INSTRUCTIONS SUPPLIED. TURN ADJUSTMENT ON SIGHT FEED DOME TO INCREASE/DECREASE OIL DELIVERY. MONITOR THE DEVICE BEING LUBRICATED AND READJUST IF NEEDED.
4. TOOL REQUIRES 90 P.S.I. AIR PRESSURE.

SERVICE

1. KEEP GOOD RECORDS OF ALL SERVICE ACTIVITY AND INCLUDE TOOL IN PREVENTIVE MAINTENANCE PROGRAM.
2. USE ONLY GENUINE KENTMASTER REPLACEMENT PARTS TO ASSURE PROPER PERFORMANCE OF TOOL.
3. CONTACT THE KENTMASTER SUPPLIER NEAREST YOU FOR PARTS AND CUSTOMER SERVICE INFORMATION.

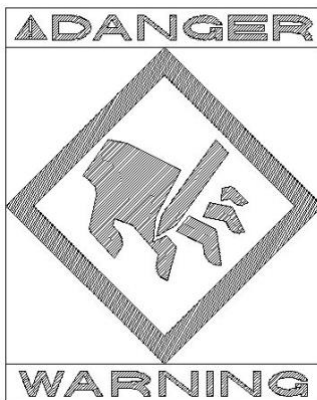

BLADE REMOVAL AND CLEANING.

⚠ WARNING ALWAYS DISCONNECT POWER SUPPLY FROM TOOL BEFORE INSTALLING OR REMOVING BLADE FROM TOOL.

⚠ WARNING ALWAYS WEAR WIRE MESH GLOVES WHEN INSTALLING OR REMOVING BLADE FROM TOOL.

1. REMOVE BOLTS, NUTS AND BUSHING (ITEM NO. 1, 2, 3, 4 AND 5, FIG. NO. 1).
2. REMOVE BLADE (ITEM NO. 6, FIG. NO. 1).
3. CLEAN BLADES WITH SOAP AND WATER.
4. SHARPEN OR REPLACE BLADES WHEN NECESSARY.
5. REASSEMBLE IN REVERSE ORDER.
6. **FILL WITH GREASE (KENTMASTER GREASE – NO. 790307) AT (4) FITTINGS (F) BEFORE USING TOOL.**

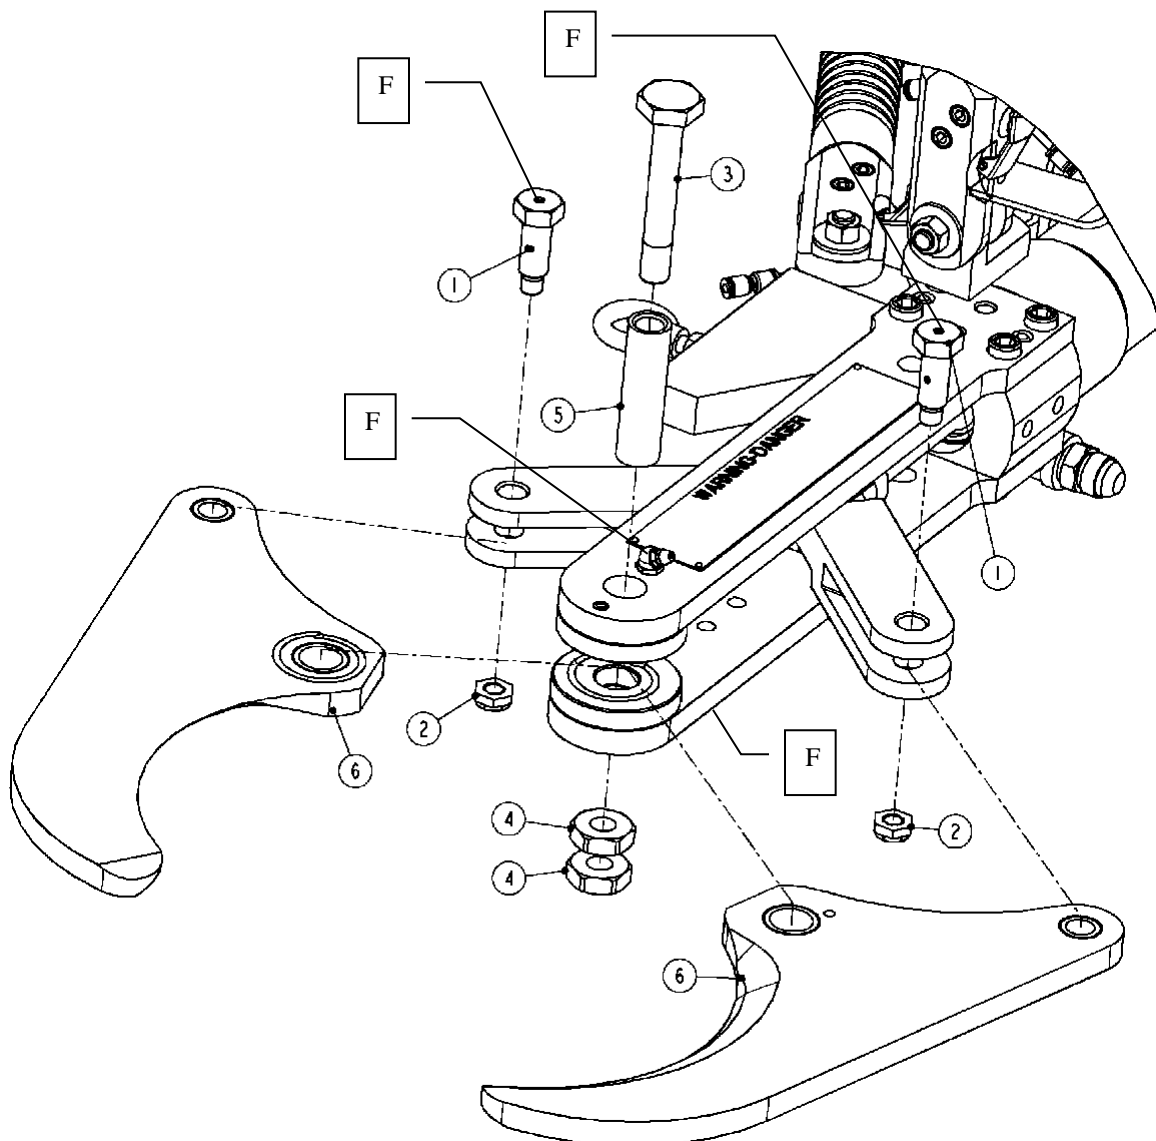


Figure 1 MODEL HC-3 – BLADE REPLACEMENT

PARTS BOOK

HC-3, HOCK CUTTER AND DEHORNER


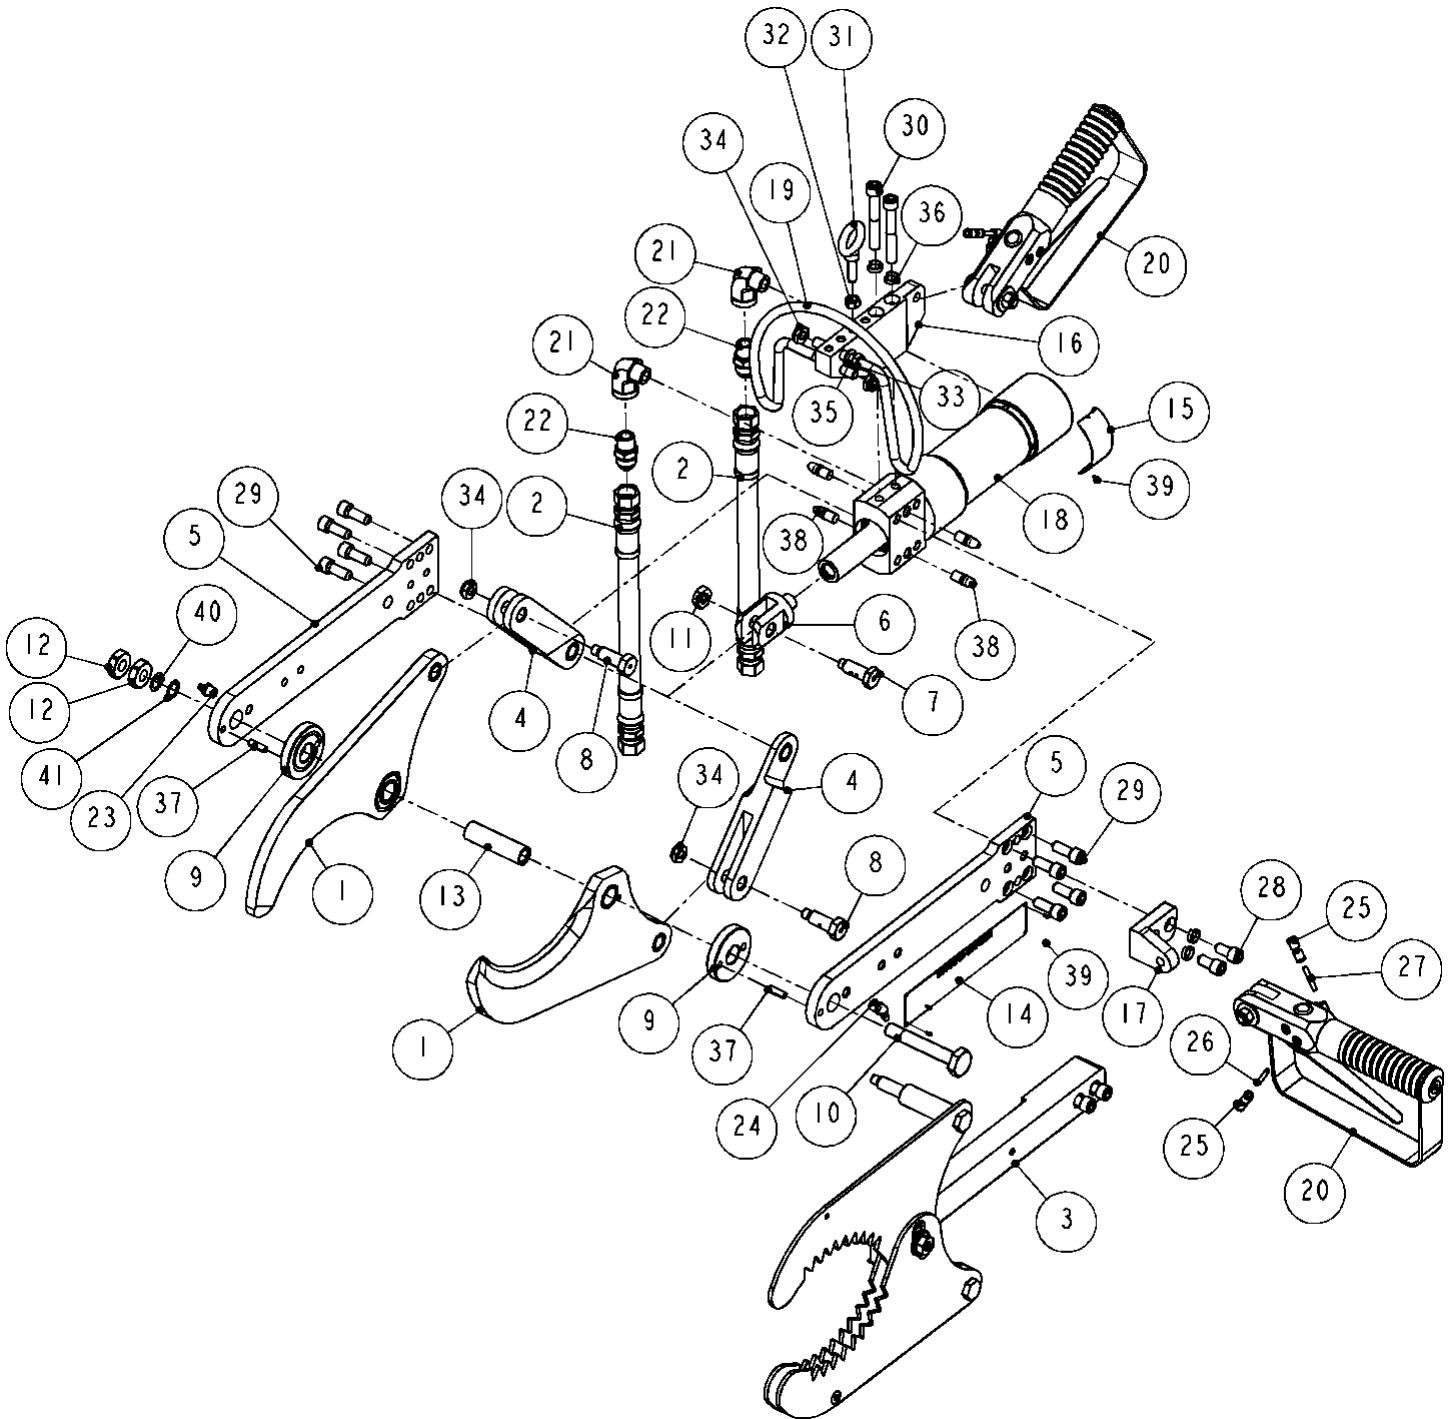


Figure 2 MODEL "HC-3" – MAIN ASSEMBLY

| 6540100: HC-3, HOCK CUTTER AND DEHORNER | | | |
|--|---------------|---------------------------------------|------------|
| ITEM | PART # | DESCRIPTION | QTY |
| 1 | 6541190 | BLADE w/ BUSHINGS | 2 |
| 2 | 7303500 | HYDRAULIC HOSE - OPTIONAL | 2 |
| 3 | 6541840 | LEG HOLDER ASSEMBLY - OPTIONAL | 1 |
| 4 | 6541010 | CONNECTING LINK | 2 |
| 5 | 6541020 | SIDE BAR | 2 |
| 6 | 6541030 | CLEVIS | 1 |
| 7 | 6541040 | PIN, CLEVIS | 1 |
| 8 | 6541050 | PIN | 2 |
| 9 | 6541060 | SPACER | 2 |
| 10 | 6541070 | BOLT | 1 |
| 11 | 6541090 | NUT | 1 |
| 12 | 6541110 | NUT | 2 |
| 13 | 6541120 | SLEEVE | 1 |
| 14 | 6541250 | PLATE | 1 |
| 15 | 6541380 | NAME PLATE | 1 |
| 16 | 6541430 | BRACKET - HANGER, HANDLE | 1 |
| 17 | 6541620 | BRACKET | 1 |
| 18 | 6542100 | HYDRAULIC CYLINDER | 1 |
| 19 | 6542450 | HANGER | 1 |
| 20 | 6600530 | AIR HANDLE | 2 |
| 21 | 7000420 | ELBOW | 2 |
| 22 | 7012190 | MALE CONNECTOR | 2 |
| 23 | 7016100 | LUBE FITTING | 1 |
| 24 | 7016120 | LUBE FITTING | 1 |
| 25 | 7037860 | UNION | 4 |
| 26 | 7300710 | RED AIR TUBE | 2 |
| 27 | 7300720 | GREEN AIR TUBE | 2 |
| 28 | 8215060 | SCREW | 2 |
| 29 | 8215080 | SCREW | 8 |
| 30 | 8215220 | SCREW | 2 |
| 31 | 8463070 | SHOULDER EYE BOLT - OPTIONAL | 1 |
| 32 | 8500130 | NUT - OPTIONAL | 1 |
| 33 | 8500190 | NUT | 1 |
| 34 | 8504870 | NUT | 4 |
| 35 | 8506160 | WASHER | 1 |
| 36 | 8506660 | WASHER | 4 |
| 37 | 8614120 | PIN | 2 |
| 38 | 8622520 | DOWEL PIN | 4 |
| 39 | 8640130 | DRIVE SCREW | 6 |
| 40 | 8705020 | WASHER | 1 |
| 41 | 8705030 | WASHER | 1 |

Figure 3 BOM FOR MODEL "HC-3"


HC-3, REPLACMENT BUSHINGS FOR BLADES AND LINKS

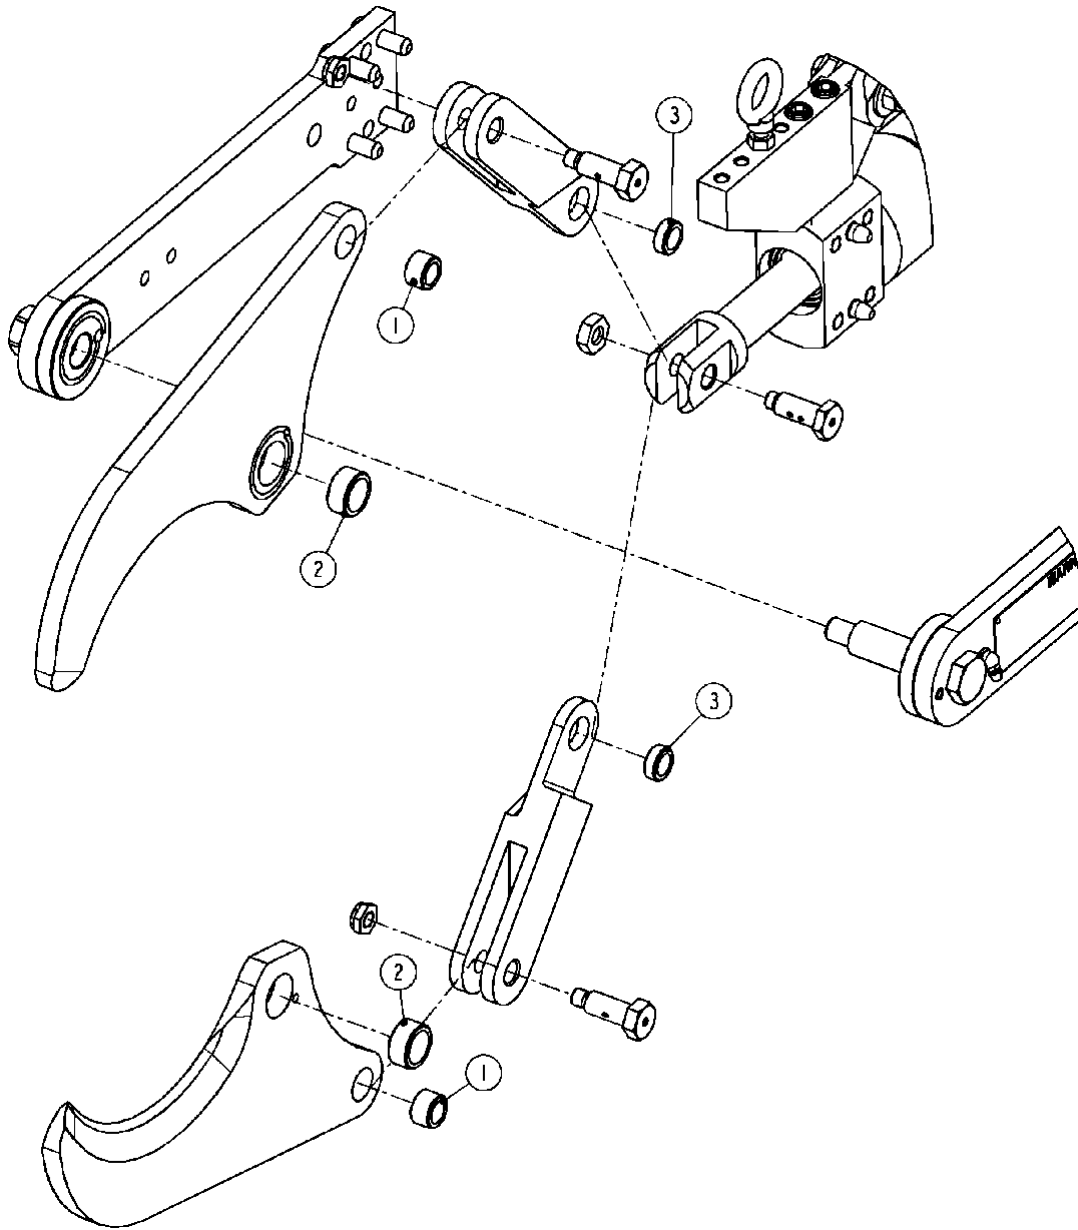


| | | | |
|--|---------|--------------------------|-----|
| 3 | 6541180 | BUSHING, CONNECTING LINK | 2 |
| 2 | 6541170 | BUSHING, BLADE, LARGE | 2 |
| 1 | 6541160 | BUSHING, BLADE, SMALL | 2 |
| ITEM | PART | DESCRIPTION | QTY |
| BUSHINGS USED WITH BLADES AND LINKS | | | |

Figure 4 HC-3, BUSHINGS FOR BLADES AND LINKS

HYDRAULIC CYLINDER ASSEMBLY

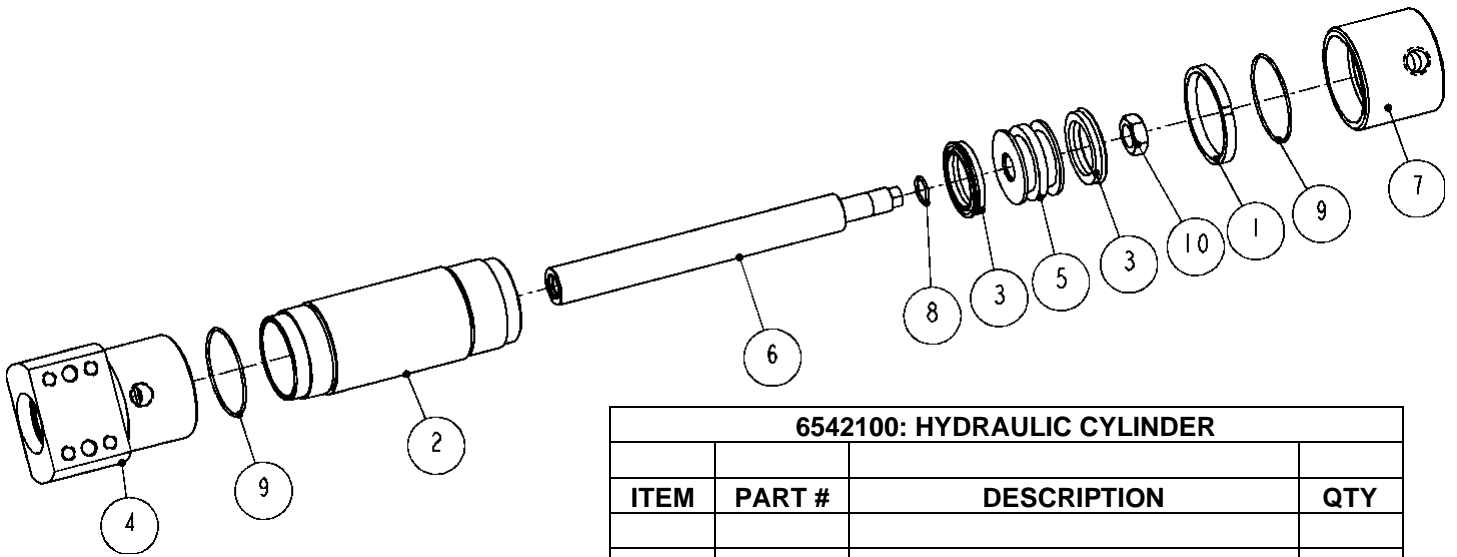


| 6542100: HYDRAULIC CYLINDER | | | |
|-----------------------------|---------|-----------------------|-----|
| ITEM | PART # | DESCRIPTION | QTY |
| 1 | 6532010 | NUT | 1 |
| 2 | 6532020 | BODY, CYLINDER | 1 |
| 3 | 6532070 | U-CUP, PISTON | 2 |
| 4 | 6541470 | ROD AND HEAD ASSEMBLY | 1 |
| 5 | 6542010 | PISTON | 1 |
| 6 | 6542020 | ROD | 1 |
| 7 | 6542040 | HEAD | 1 |
| 8 | 7680160 | O-RING | 1 |
| 9 | 7680350 | O-RING | 2 |
| 10 | 8500540 | NUT | 1 |

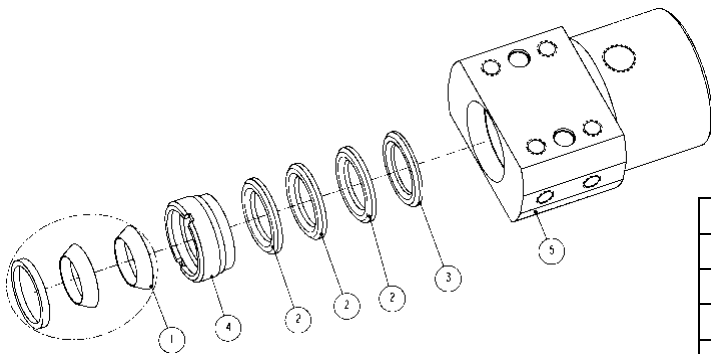

| 6541470: ROD AND HEAD ASSEMBLY | | | |
|--------------------------------|---------|------------------------|-----|
| ITEM | PART # | DESCRIPTION | QTY |
| 1 | 6512110 | SEAL GUARD - 3 PC. SET | 1 |
| 2 | 6512140 | PACKING ROD | 3 |
| 3 | 6512150 | ADAPTOR, PACKING | 1 |
| 4 | 6541450 | NUT, PACKING | 1 |
| 5 | 6541460 | HEAD, ROD END | 1 |

Figure 5 HYDRAULIC CYLINDER ASSEMBLY


HANDLES

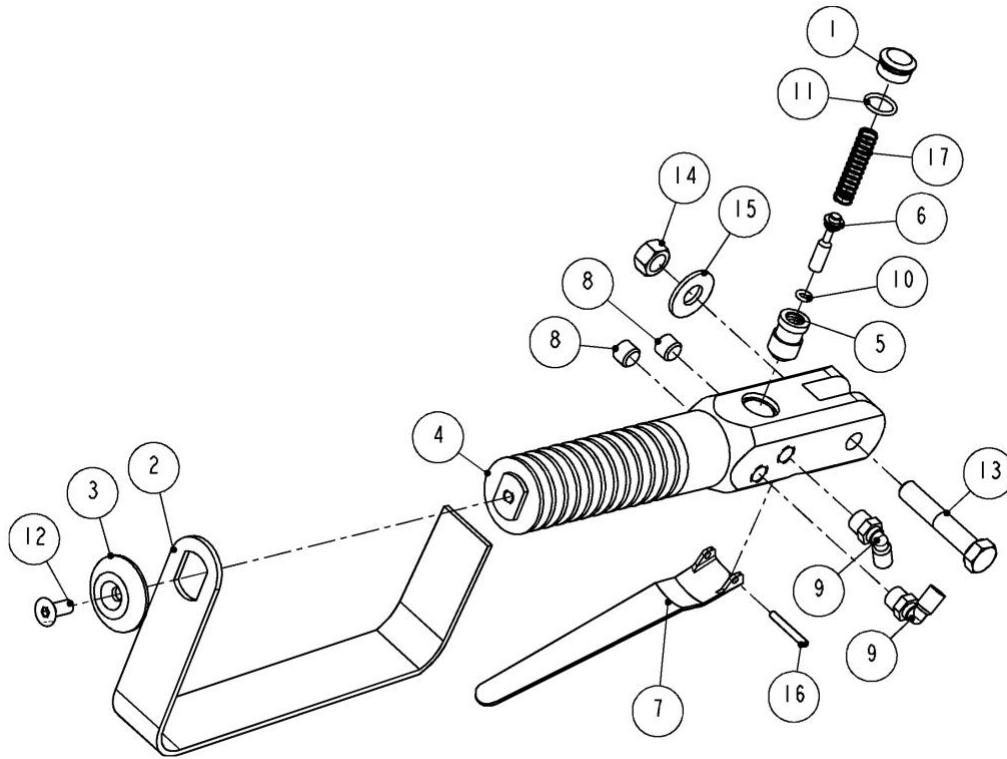

| 6600530: AIR HANDLE | | | |
|----------------------------|---------|-------------|-----|
| ITEM | PART # | DESCRIPTION | QTY |
| 1 | 6300770 | VALVE PLUG | 1 |
| 2 | 6541690 | GUARD | 1 |
| 3 | 6541720 | RETAINER | 1 |
| 4 | 6600340 | HANDLE | 1 |
| 5 | 6600350 | BUSHING | 1 |
| 6 | 6600360 | VALVE STEM | 1 |
| 7 | 6600500 | LEVER | 1 |
| 8 | 7000010 | PLUG | 2 |
| 9 | 7036510 | ELBOW | 2 |
| 10 | 7680080 | O-RING | 1 |
| 11 | 7680140 | O-RING | 1 |
| 12 | 8241050 | SCREW | 1 |
| 13 | 8415160 | SCREW | 1 |
| 14 | 8500150 | NUT | 1 |
| 15 | 8505160 | WASHER | 1 |
| 16 | 8620080 | PIN | 1 |
| 17 | 8890010 | SPRING | 1 |

Figure 6 AIR HANDLE


LEG HOLDER

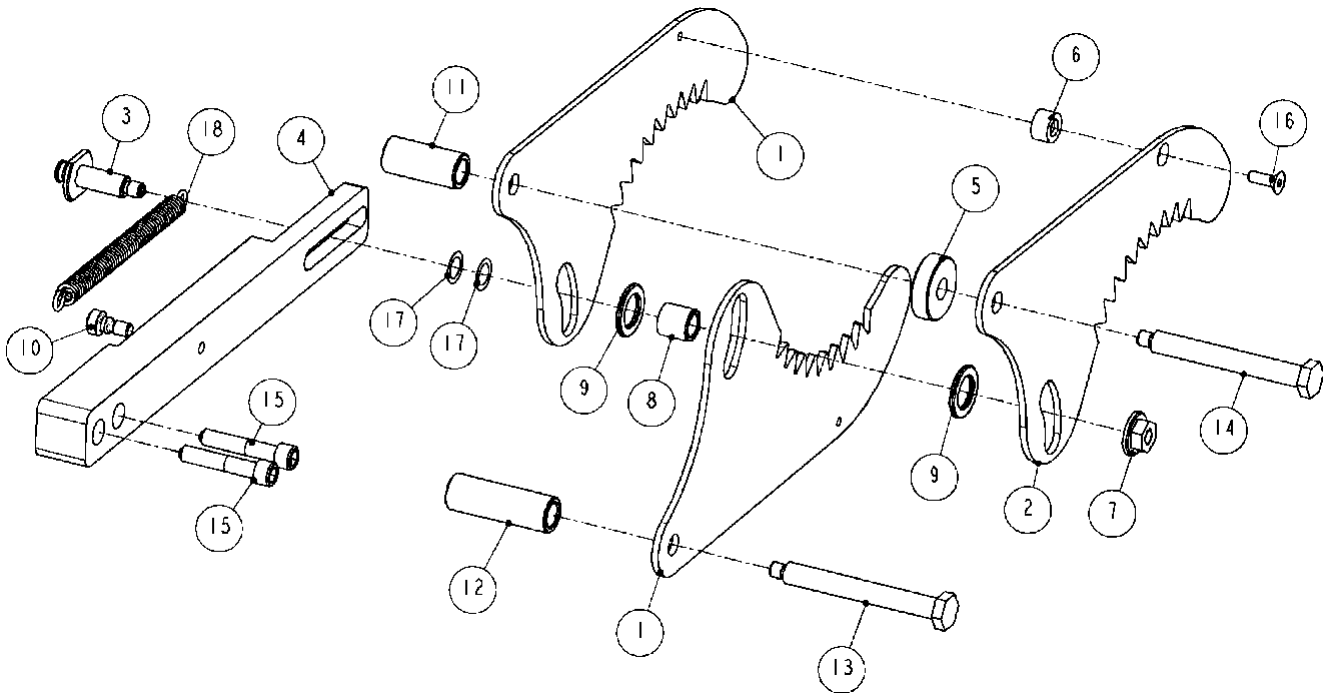

| 6541840: LEG HOLDER ASSEMBLY - OPTIONAL | | | |
|---|---------|---------------|-----|
| ITEM | PART # | DESCRIPTION | QTY |
| 1 | 6541730 | JAW, INSIDE | 2 |
| 2 | 6541740 | JAW, OUTSIDE | 1 |
| 3 | 6541770 | PIN, JAW | 1 |
| 4 | 6541780 | FRAME | 1 |
| 5 | 6541790 | SPACER | 1 |
| 6 | 6541800 | SPACER | 1 |
| 7 | 6541810 | NUT | 1 |
| 8 | 6541820 | SPACER | 1 |
| 9 | 6541830 | SPACER | 2 |
| 10 | 6541850 | SCREW | 1 |
| 11 | 6541860 | SLEEVE, SHORT | 1 |
| 12 | 6541870 | SLEEVE, SHORT | 1 |
| 13 | 6541880 | BOLT - TOP | 1 |
| 14 | 6541890 | BOLT - BOTTOM | 1 |
| 15 | 8215160 | SCREW | 2 |
| 16 | 8241060 | SCREW | 1 |
| 17 | 8705010 | WASHER | 2 |
| 18 | 8895000 | SPRING | 1 |

Figure 7 LEG HOLDER

LEG HOLDER INSTALLATION

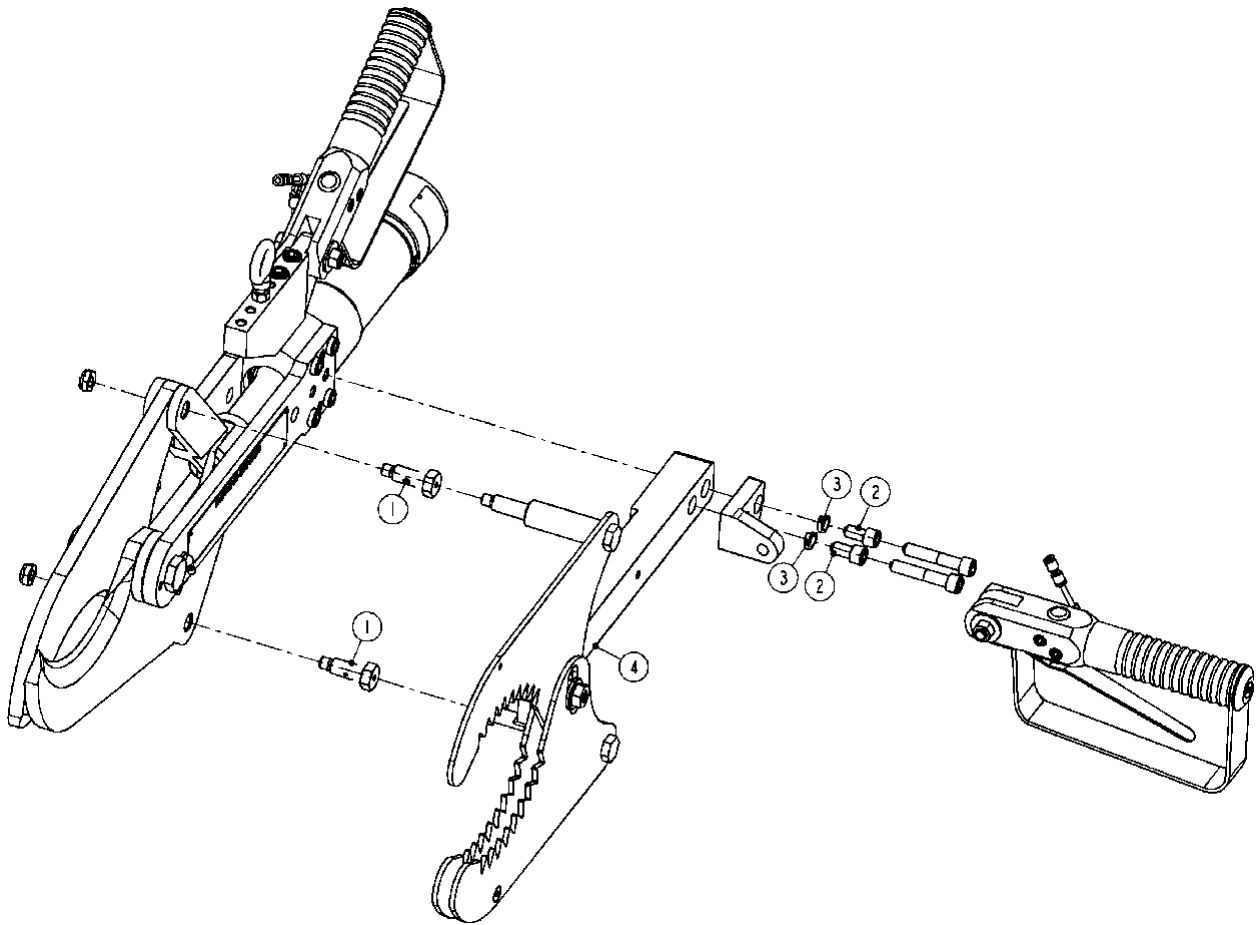

REMOVE ITEMS #1, #2, #3. INSTAL LEG HOLDER, ITEM #4 AS SHOWN.

Figure 8 LEG HOLDER INSTALLATION

TUBING DIAGRAM

HC-3 TUBING DIAGRAM WITHOUT ANTI-TIE DOWN OPTION

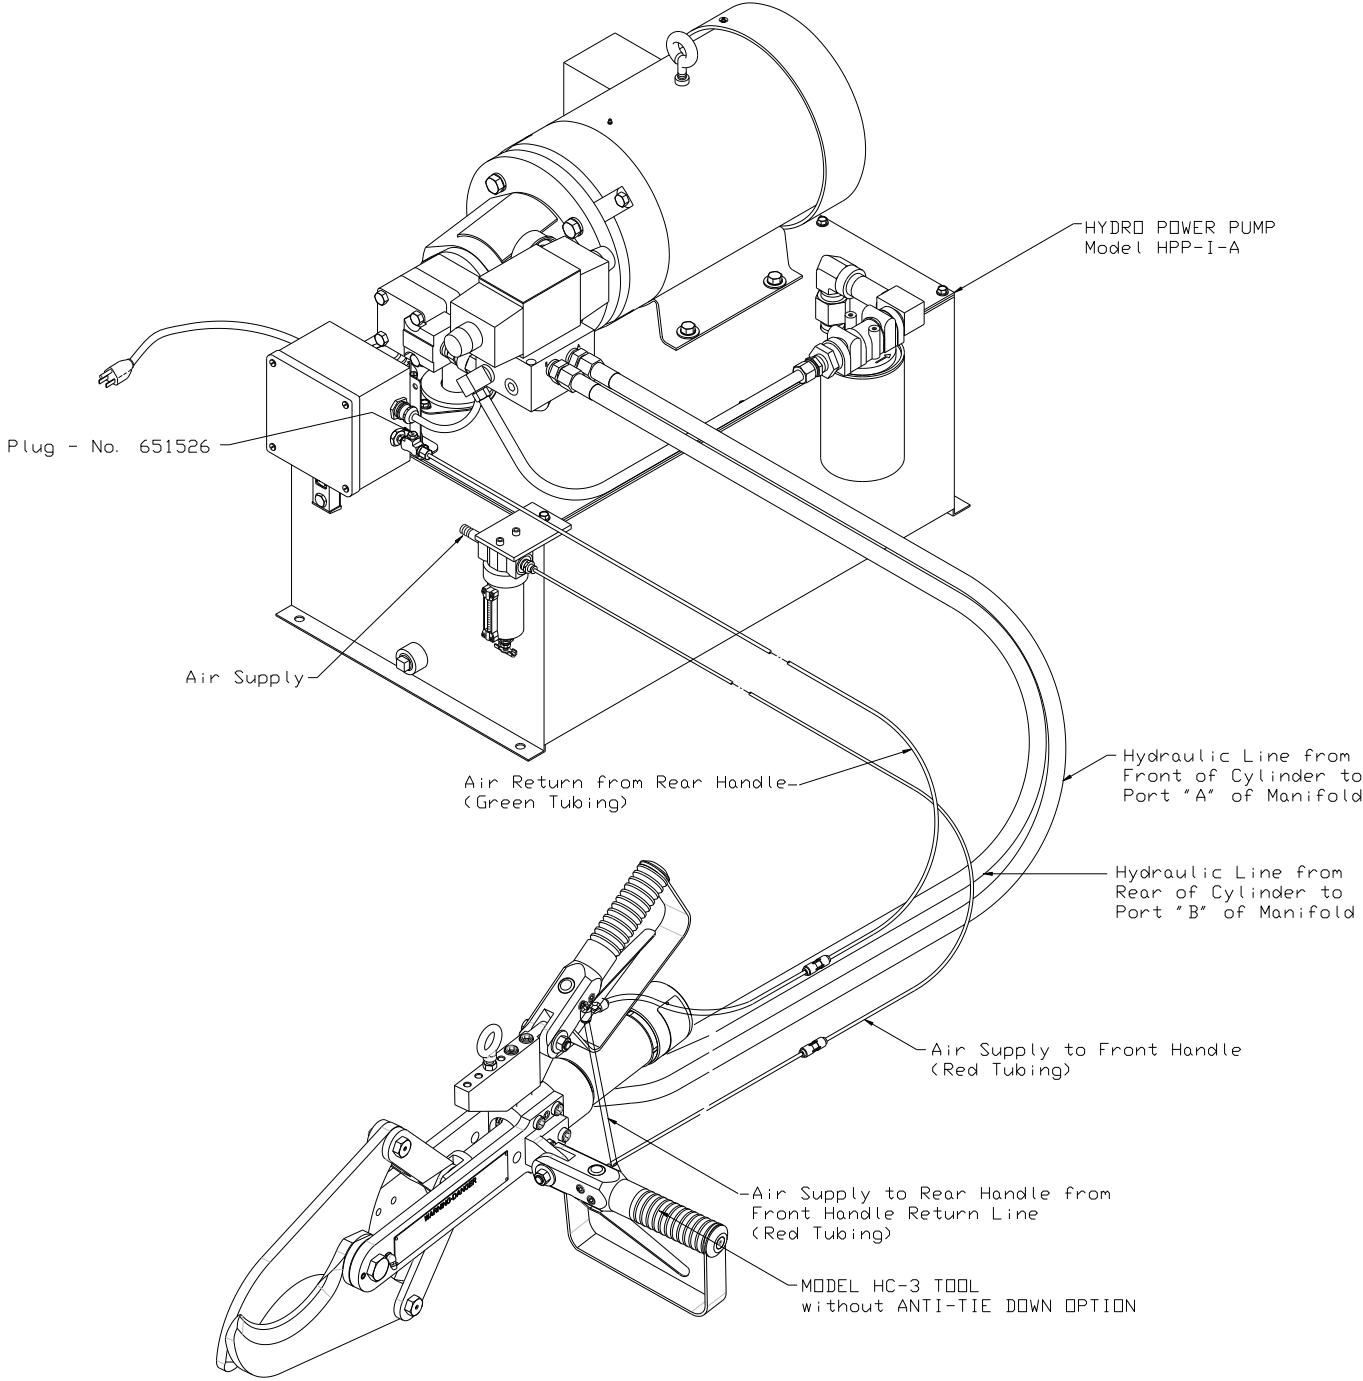


Figure 9 HC-3 TUBING DIAGRAM WITHOUT ANTI-TIE DOWN

HC-3 TUBING DIAGRAM WITH ANTI-TIE DOWN OPTION

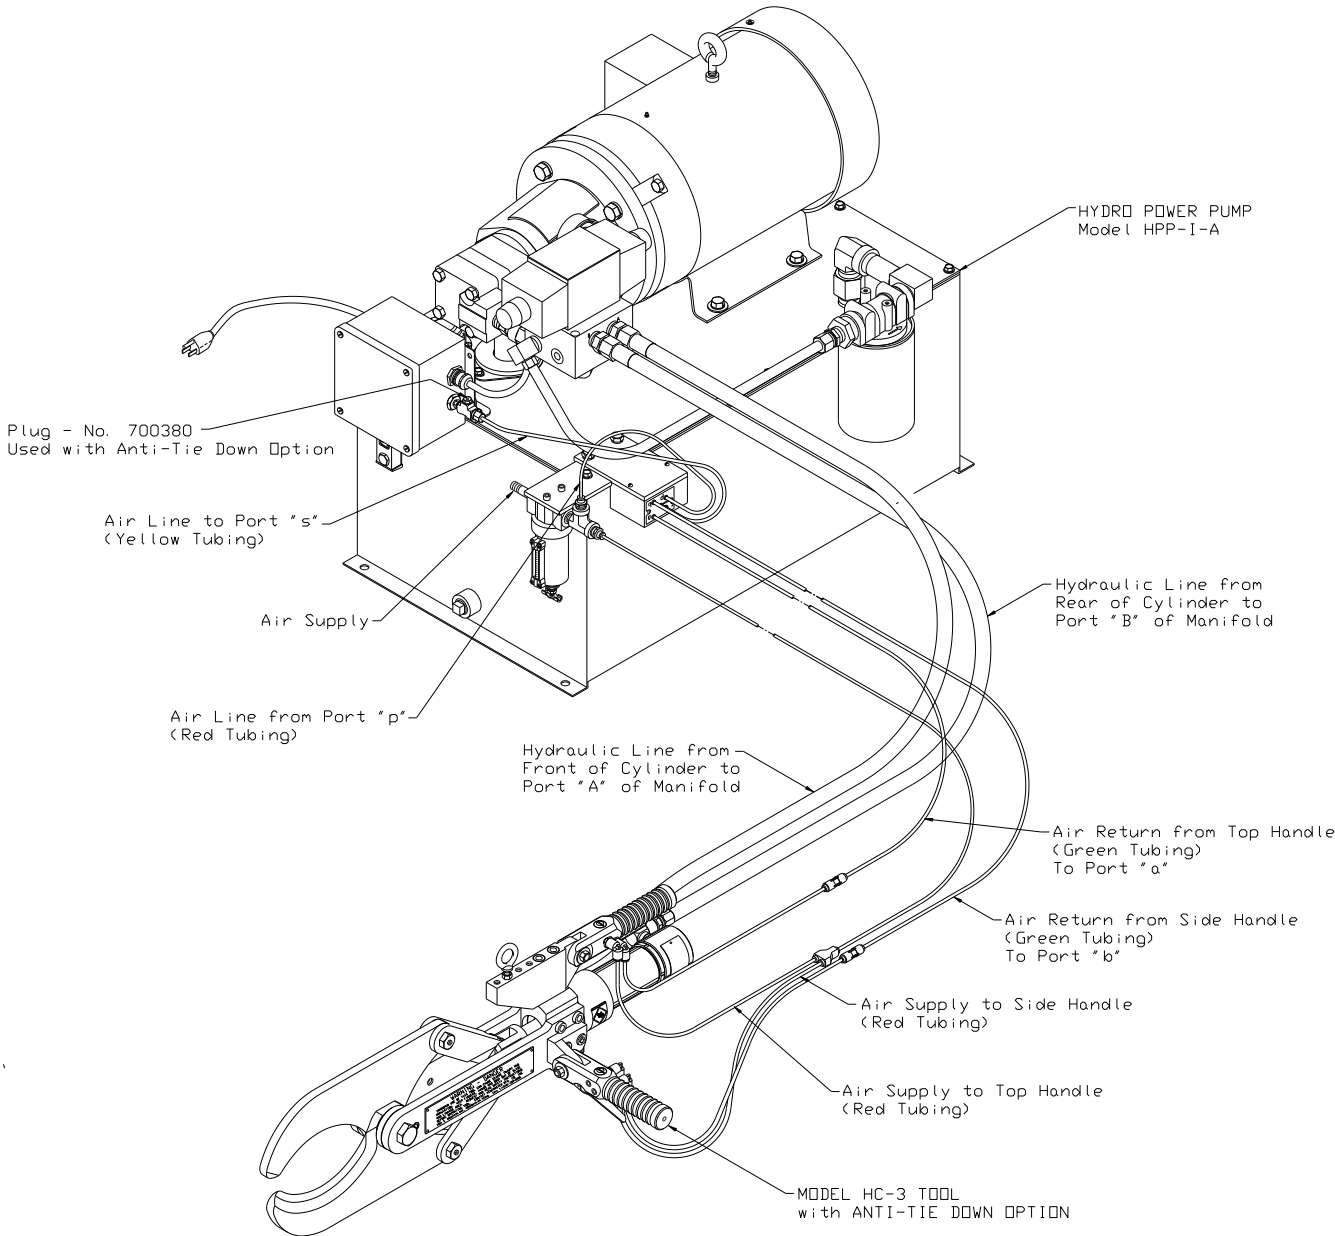
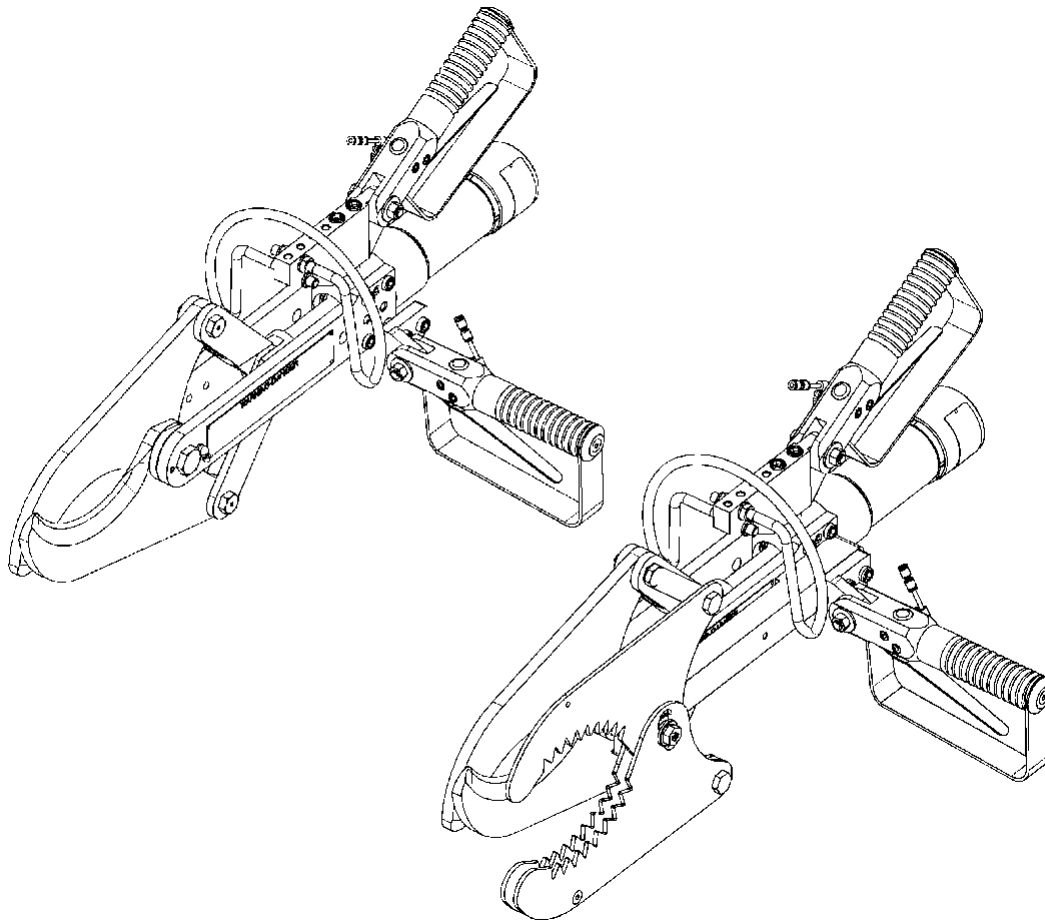


Figure 10 HC-3 TUBING DIAGRAM WITH ANTI-TIE DOWN

[ENGLISH]

GENERAL INFORMATION**MODEL****“HC-3” HYDRAULIC HOCK CUTTER AND DEHORNER****SERVICE CENTERS**

KENTMASTER EQUIPMENT (AUST)
 UNIT 2/24 CENTRAL COURT
 HILLCREST, QUEENSLAND, 4118
 AUSTRALIA


☎ TELEPHONE: +61 7 3806 8400
 FAX: +61 7 3806 7933
 E-MAIL: sales@kentmaster.com.au

KENTMASTER MFG. CO., INC.
 1801 SOUTH MOUNTAIN AVE.
 MONROVIA, CALIFORNIA 91016
 UNITED STATES OF AMERICA

☎ TELEPHONE: (626) 359-8888
 FAX: (626) 303-5151

NOTICE TO EMPLOYER AND PURCHASER OF TOOL
NOTICE TO SAFETY DIRECTOR

You have purchased a powerful tool that, if misused, can cause severe injury and harm to your employees. You must instruct your employees in the safe and proper use of this tool and to follow the safety procedures and instructions that have been supplied by the manufacturer of this tool. Please follow the following instructions.

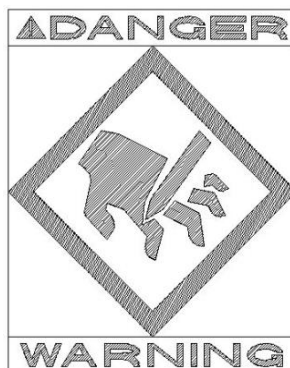

1. Instruct tool operators to test the tool each day before using it to be sure it does not malfunction. Remove and repair any tool that malfunctions.
2. Instruct tool operators to immediately stop using a tool that malfunctions or is defective.
3. Instruct personnel to immediately remove all tools that malfunction. Be sure to disconnect tool from power supply.
4. Instruct all personnel to stay clear of tool, and not to stand or walk in front of, or next to tool when in use.
5. Point out to all personnel the dangers related to the misuse of tool and the importance of following safety procedures and instructions.
6. Do not make, or allow others to make, alterations or modifications to this tool. Replace all lost or illegible labels.
7. Follow all safety, installation and maintenance instructions provided with this tool. Establish proper safety procedures in accordance with local and national requirements to prevent accidental energizing of tool that can cause injuries.
8. If this tool is sold or change in ownership takes place, you must provide the new owner all safety instructions, notices and maintenance instructions you were originally provided. You can obtain additional copies of the instructions from Kentmaster, free of charge upon request.
9. Give copies of instructions to:
 - (A) Tool Operators**
 - (B) Maintenance Supervisor**
 - (C) Clean-up Supervisor**

GENERAL INFORMATION

COVERING: SAFETY PRECAUTIONS AND PLACING INTO SERVICE HYDRAULIC HOCK CUTTER AND DEHORNER

READ THIS MANUAL CAREFULLY BEFORE INSTALLING, OPERATING OR SERVICING THIS TOOL

IT IS THE RESPONSIBILITY OF THE EMPLOYER TO PLACE THIS INFORMATION INTO THE HANDS OF THE OPERATOR.

PLACING INTO SERVICE



WARNING

= Hazards or unsafe practices which could result in severe personal injury, death or substantial property damage.



CAUTION

= Hazards or unsafe practices which could result in minor personal injury, product or property damage.



NOTICE

= Important installation, operation or maintenance information.



WARNING

Installation, adjustment repair and maintenance of this tool must be made by trained and qualified personnel.



WARNING

Always disconnect power supply from tool before:

- (A) Installing or removing blade from tool.
- (B) Making repairs or adjustments to the tool.
- (C) performing maintenance or cleanup work.

DECLARATION OF CONFORMITY**DECLARATION OF CONFORMITY**DECLARATION DE CONFORMITE -DECLARACION DE CONFORMIDAD- ERKLARUNG BEZUGLICH EINHALTUNG DER VORSCHRIFTEN
DICHIARAZIONE DI CONFORMITA . CONFORMITEITSVERKLARING**MANUFACTURED BY:**FABRIQUE PAR:
FABRICADA POR:
HERGESTELLTVON:
FABBRICATO DA:
VERVAARDIGD DOOR:**KENTMASTER MFG CO., INC.**
1801 SOUTH MOUNTAIN AVE.
MONROVIA, CALIFORNIA 91016
UNITED STATES OF AMERICA
TELEPHONE (626) 359-8888 FAX (626) 303-5151**TYPE / SERIES: HYDRAULIC HOCK CUTTER AND DEHORNER**TYPE / SERIE:
TIPO / SERIE:
TYP / SERIE:
TIPO / SERIE:
TYPE / SERIE:**MODEL: HC-3**MODELE:
MODELO:
MODELL:
MODELLO:
MODEL:**SERIAL NO. RANGE: XXXXX**

N SERIE: • GAMA DE No. DE SERIE: • SERIEN-NR.-BEREICH: • NUMERI DI SERIE: • SERIENUMMERS:

This product complies with the following European Community Directives:Ce produit est conforme aux directives de la Communauté européenne suivantes:
Este producto cumple con las siguientes Directrices de la Comunidad Europea:
Dieses Produkt erfüllt die folgenden Vorschriften der Europäischen Gemeinschaft:
Questo prodotto e conforme alle seguenti direttive CEE:
Dit produkt voldoet aan de volgende EG-richtlijnen:**89/392/EEC, 91/368/EEC, 93/44/EEC, 93/68/EEC****The following Standards were used to verify compliance with the Directives:**Les normes suivantes ont été utilisées pour vérifier la conformité avec les Directives:
Las siguientes Normas se usaron para verificar el cumplimiento de las Directrices:
Folgende Normen wurden angewandt, um Erfüllung der Vorschriften zu bestätigen:
Per verificare la conformità del prodotto alle direttive sono stati usati i seguenti standard:
De volgende normen zijn gebruikt om naleving van de richtlijnen te bevestigen:**EN 292****Approved by:**_____
RALPH KARUBIAN MONROVIA, CA. U.S.A
(Engineering Manager) (Directeur technique) (gerente de ingenieria) (verantwortlicher Konstruktionsleiter) (Responsabile tecnico) (ondersteunend technisch mangar)**Date: AUG - 1 - 1995**

Kentmaster Worldwide Location

Kentmaster Equipment (Aust) PTY.LTD.

Unit 2,24 Central Court

Hillcrest, Qld. 4118

Australia

Telephone: (07) 3806-8400

Fax: (07) 3806-7933

Australia@Kentmaster.com.au

Kentmaster do Brasil, Ltda.

Av. Dr. Joao Teodoro No. 805

Bairro De Vila Rezende

13405-240 Piracicaba, SP,

Brazil

Telephone #1: (019) 3 413 3113

Telephone #2: (019)983-4973

Fax: (019) 3 413 3113

Brazil@Kentmaster.com

Kentmaster (IRL) LTD.

Benamore, Dublin Road.

Roscrea,

CO, Tipperary,

Ireland

Telephone: (353) 0505-23292

Fax: (353) 0505-23299

Ireland@Kentmaster.com

Kentmaster Equipment (NZ) LTD.

5 Cooper Street

Havelock North

New Zealand

Telephone #1: (64) 6 8777 857

Telephone #2: 0800 KENTMASTER

Fax: (64) 6 8777 858

NewZealand@Kentmaster.com

Kentmaster South Africa (PTY) LTD.

Johannesburg - S. Africa

Unit 54 Sunnyrock Park

Sunrock Close, Germiston

South Africa

Telephone: (27) 11-455-3748

Fax: (27) 11-455-3749

SouthAfrica@Kentmaster.com

Kentmaster (UK) LTD.

Unit 16 Avonbank Ind. Centre

West Town Rd, Avonmouth-Bristol,

BS11 9DE

England

Telephone: (44) 117-923-5035

Fax: (44)-117-932-9010

UK@Kentmaster.com

Kentmaster Mfg. Co., Inc.

1801 South Mountain Ave.

Monrovia, CA, 91016

USA

Telephone #1: (626) 359-8888

Telephone #2: (800) 421-1477

Fax: (626) 303-5151

info@Kentmaster.com

Kentmaster Omaha

4417 South 139th Street

Omaha, NE, 68137

USA

Telephone #1: (402) 896-3355

Telephone #2: (800) 367-3181

Fax: (402) 896-3311

Omaha@Kentmaster.com

INDEX

| | |
|--|-----------|
| OPERATING AND SAFETY INSTRUCTIONS | 2 |
| OPERATING INSTRUCTIONS | 3 |
| MAINTENANCE | 3 |
| SERVICE | 3 |
| PARTS BOOK | 5 |
| HC-3, HOCK CUTTER AND DEHORNER | 5 |
| HC-3, REPLACEMENT BUSHINGS FOR BLADES AND LINKS | 7 |
| HYDRAULIC CYLINDER ASSEMBLY | 8 |
| HANDLES | 9 |
| LEG HOLDER | 10 |
| LEG HOLDER INSTALLATION | 11 |
| TUBING DIAGRAM | 12 |
| HC-3 TUBING DIAGRAM WITHOUT ANTI-TIE DOWN OPTION | 12 |
| HC-3 TUBING DIAGRAM WITH ANTI-TIE DOWN OPTION | 13 |
| GENERAL INFORMATION | 16 |
| DECLARATION OF CONFORMITY | 17 |
| <i>Kentmaster Worldwide Location</i> | 18 |
| INDEX | 19 |
| FIGURES - INDEX | 19 |

FIGURES - INDEX

| | |
|--|----|
| Figure 1 MODEL HC-3 – BLADE REPLACEMENT | 4 |
| Figure 2 MODEL “HC-3” – MAIN ASSEMBLY | 5 |
| Figure 3 BOM FOR MODEL “HC-3” | 6 |
| Figure 4 HC-3, BUSHINGS FOR BLADES AND LINKS | 7 |
| Figure 5 HYDRAULIC CYLINDER ASSEMBLY | 8 |
| Figure 6 AIR HANDLE | 9 |
| Figure 7 LEG HOLDER | 10 |
| Figure 8 LEG HOLDER INSTALLATION | 11 |
| Figure 9 HC-3 TUBING DIAGRAM WITHOUT ANTI-TIE DOWN | 12 |
| Figure 10 HC-3 TUBING DIAGRAM WITH ANTI-TIE DOWN | 13 |