




Capacity	Accuracy	Part number
5Klb	N3	H9C-N3-5K-9.3B
10Klb	N3	H9C-N3-10K-9.3B
20Klb	N10	H9C-N10-20K-9.3B
30Klb	N10	H9C-N10-30K-9.3B
40Klb	N10	H9C-N10-40K-9.3B
50Klb	N10	H9C-N10-50K-9.3B
60Klb	N10	H9C-N10-60K-9.3B
75Klb	N10	H9C-N10-75K-9.3B
100Klb	N10	H9C-N10-100K-9.3B
150Klb	N10	H9C-N10-150K-9.3B
200Klb	N3	H9C-N3-200K-9.3B
250Klb	N3	H9C-N3-250K-9.3B

Accuracy Class	OIML R60 C3	NTEP	L	N3	Temperature effect on zero (%FS/10)	0.018	0.025
Rated output (mV/V)	3.0±0.003				Temperature, Compensated ()	-10~+40	
Combined error (%FS)	0.02				0.03	Temperature, Operating ()	-35~+65
Non-linearity (%FS)	0.017				0.03	Excitation, Recommended (V)	5-12(DC)
Non-repeatability (%FS)	0.01				Excitation, Max.(V) 18(DC)		
Creep (%FS/30min)	0.02				0.03	Safe Overload (%FS)	150
Input Resistance ()	700±7				Ultimate Overload (%FS) 300		
Output Resistance ()	700±7				Protection Class IP 67		
Insulation Resistance (M)	5000(50VDC)				Cable Length (m) 9.3		
Zero Balance (%FS)	1.0				Cable spec 4-wire shielded PU cable φ5mm(5K-20K), φ8mm(30K-250K)		
Temperature effect on span (%FS/10)	0.014				0.02		

Connections Red Input(+) Black Input(-) Green Output(+) White Output(-) Transparence (Shield)

Outline Dimensions in mm(inches)

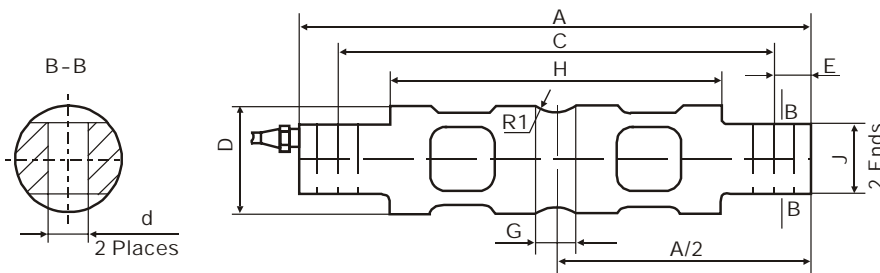

Capacity(Klb)	A	C	H	G	D	J	d	R1	E
5-10	206.2 (8.12)	174.6 (6.88)	133.1 (5.24)	15.7 (0.62)	43.2 (1.70)	28.4 (1.12)	16.7 (0.66)	R12.7 (0.50)	15.7 (0.62)
15-20	206.2 (8.12)	174.6 (6.88)	133.1 (5.24)	21.3 (0.84)	49.5 (1.95)	28.4 (1.12)	16.7 (0.66)	R12.7 (0.50)	15.7 (0.62)
30-75	260.4 (10.25)	215.9 (8.50)	165.1 (6.50)	25.4 (1.00)	76.2 (3.00)	60.2 (2.37)	26.9 (1.06)	R25.4 (1.00)	22.4 (0.88)
90-100	285.8 (11.25)	241.3 (9.50)	190.2 (7.49)	31.0 (1.22)	88.9 (3.50)	63.5 (2.50)	26.9 (1.06)	R38.1 (1.50)	22.4 (0.88)
150	285.8 (11.25)	241.3 (9.50)	190.2 (7.49)	31.0 (1.22)	99.1 (3.90)	71.1 (2.80)	26.9 (1.06)	R38.1 (1.50)	22.4 (0.88)
200-250	408.9 (16.10)	330.3 (13.00)	254.0 (10.00)	31.7 (1.25)	136.6 (5.38)	116.8 (4.60)	39.6 (1.56)	R50.8 (2.00)	39.4 (1.55)

Dual shear beam