


### AF Series – ABAC™ Pumps

### Stationary – 415 Volt

Our industrial range of stationary air compressors available from 4 to 10Hp using pumps from the world's largest air compressor manufacturer, ABAC SpA, offering reliable, affordable units with full after sales service. Air compressor tanks made to Australian Standard AS1210. ABAC two stage pumps are far more efficient than single stage pumps where required pressure is 100psi and above.

- ◆ Efficient two stage, Italian made ABAC pump.
- ◆ Cast iron cylinder and crankshaft.
- ◆ Two stage, 175psi\* if required.
- ◆ Intercooler & aftercooler for cooler, drier air.
- ◆ Condor auto stop/start pressure switch.
- ◆ Guard design for fan forced cooling.
- ◆ Less power usage - cheaper to run.
- ◆ Motor overload protection.
- ◆ Full range of spare parts available.
- ◆ Warranty.
  - 12 months.

160psi High Pressure\*

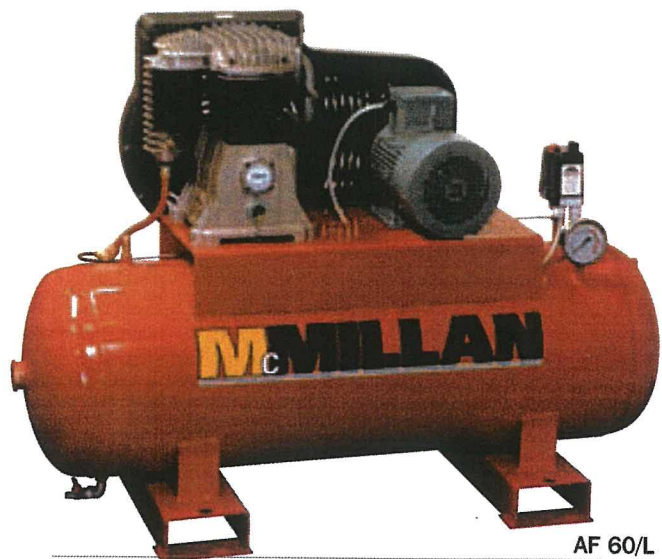

Dimensions (mm)	Length	Width	Height	Weight (kg)
AF 49	1,070	450	890	100
AF 59	1,500	430	930	125
AF 60	1,500	430	960	134
AF 60/L	1,500	620	1,095	209
AF 70	1,500	620	1,139	235

Product Code	Displacement CFM	L/min	Free Air Delivery CFM	L/min	Motor Hp	Tank Litres	Pump Model	Cylinders
AF 49	18.0	509	14.8	419	4.0	125	B4900	2 Stage Hi Pressure
AF 59	23.0	651	18.4	521	5.5	150	B5900	2 Stage Hi Pressure
AF 60	29.2	826	23.3	659	7.5	150	B6000	2 Stage Hi Pressure
AF 60/L	29.2	826	23.3	659	7.5	250	B6000	2 Stage Hi Pressure
AF 70	42.7	1,208	34.2	968	10.0	250	B7000	2 Stage Hi Pressure

\*175psi is the maximum recommended top pressure  
 These models are factory set to 160psi top pressure unless otherwise specified

CFM x 28.3 = Litres per minute  
 Displacement & FAD calculated at 100psi.  
 Specifications/configuration may change at any time without notice.

For improved air quality please consider our Refrigerated Dryers and Filters.