
## specifications

## Refrigeration

## **TMF650N-A Series**

ActiveCore Series, 1 Door (Glass), Upright Freezer

Project:

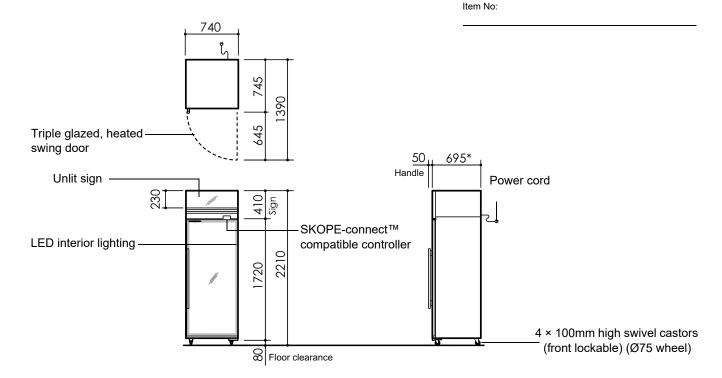

CABINET

Door 1 × self-closing, triple glazed, single Low-E film, heated, lockable, argon

filled, toughened safety glass swing door (hinged RH)

Internal door opening 1 × door openings: 1570mm high × 620mm wide

5 × adjustable height wire shelves: 625mm wide × 470mm deep Shelves

Sign

Material Powdercoat galvanised steel

PERFORMANCE

Max. ambient temp. 40°C

-21°C to -18°C (adjustable with SKOPE-connect™ -26°C to -12°C) Temperature range Standard: ≤63.5 dB(A)

Noise measurement Hush Mode: ≤61.5 dB(A)

**GEMS** class L1

GEMS energy consumption 10.47 kWh/24h

GEMS annual running cost \$1,146 p.a.(@, \$0.30/kWh)

**ELECTRICAL** 

Electrical safety climate class 5

Interior side lighting 1 × 1400mm, 15W LED

Power cord Supplied with 10 Amp plug and 2.3m lead Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 5.5 Amps (includes unit 3.5 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect™ compatible)

Connectivity interface Bluetooth

Refrigeration system Top mounted, integral, removable ActiveCore freezer cartridge

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2021 SKOPE Industries Limited

(UTHDNI-0043)

R290 / 107g (natural refrigerant) Refrigerant

920 Watts (4500rpm) Nominal capacity 440 Watts/520 Watts Heat rejection (Avg./Peak) No plumbing required

## **DIMENSIONS** External Internal Height 2210mm 1570mm Width 740mm 640mm Depth 745mm 554mm Floor area $0.55m^{2}$ Weight 170kg 610L Volume

Depth 695mm excludes removable door handle and door

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Тор	300mm
Sides	Not required
Back	10mm
Bottom	Not required



Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673 Email: skope@skope.com, Website: www.skope.com





PSS0689 Rev. 1.1 Nov. 2021