

## Electric Towing Tug – 1600kg Capacity – Compact Cart & Bin Mover with Swinging Hitch

The KMT-UT160 Electric Towing Tug is a compact and powerful solution for safely moving loads up to **1600kg** in hospitals, airports, warehouses, factories, retail stores and industrial facilities. Designed to reduce manual handling effort, this battery-powered tug is ideal for moving carts, trailers, hoppers, bins and other wheeled equipment.

Featuring a powerful 24V / 1200W drive motor, compact dimensions and a swinging hitch system, the KMT-UT160 provides excellent manoeuvrability in confined areas while delivering increased towing capacity compared to smaller electric tugs.

The ergonomic handle controls, automatic braking system and adjustable hitch design provide operators with safe, controlled and efficient load movement throughout the workplace.

### Features

#### Powerful 24V DC Drive Motor:

- 1200W high-torque motor provides reliable performance for towing heavier loads.

#### Enhanced Safety Features:

- Emergency stop buttons located on the handle and rear of the unit.
- Electromagnetic disc brake with automatic dead-man safety function.
- Manual brake release lever for emergency use.

#### Ergonomic Control Handle:

- Forward/reverse operation.
- Speed adjustment.
- Horn function.
- Battery level display.

#### Battery & Charging:

- Includes two 12V / 45Ah batteries.
- External 24V / 8A charger included.

#### Flexible Swinging Hitch System:

- Adjustable pin hitch plate.
- Side-to-side swinging hitch arm.
- Optional attachments available.

#### Compact Manoeuvrable Design:

- 785mm turning radius.
- Suitable for narrow aisles and confined work areas.




Visit [www.mitaco.com.au](http://www.mitaco.com.au) for more photos and details

## Specifications

|                |        |           |
|----------------|--------|-----------|
| Model          |        | KMT-UT160 |
| Rated Capacity | (kg)   | 1600      |
| Driving Motor  | (V/W)  | 24/1200   |
| Travel Speed   | (km/h) | 0-4       |
| Battery        | (V/Ah) | 2×12/45   |
| Charger        | (V/A)  | 24/8      |

|                |      |                  |
|----------------|------|------------------|
| Turning Radius | (mm) | 785              |
| Drive Wheel    | (mm) | 300×125          |
| Rear Wheel     | (mm) | 100×32           |
| Front Wheel    | (mm) | 100×50           |
| Overall Size   | (mm) | L1080×W650×H1055 |
| Net Weight     | (kg) | 185              |

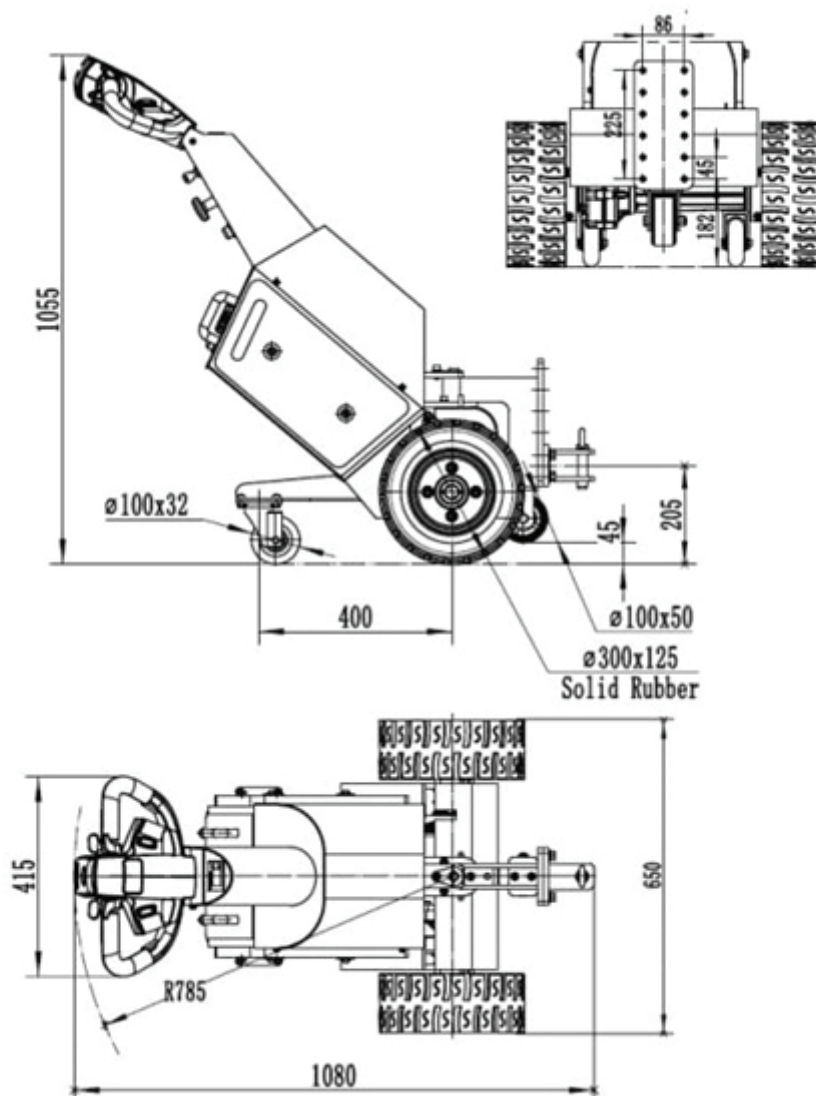

Mitaco has national sales and distribution capabilities, our sales office and warehouse is located in Brisbane. Large inventory holdings enable fast-track dispatch of stock orders. This combined with an easy to use online ordering system makes the delivery of stocked products simple, fast and reliable.