




PREMIUM JET PRESSURE PUMPS

PRJ SERIES

The PRJ Premium Series of pressure pumps are of superior quality construction and efficiency giving real power savings to the owner. They are suitable for the supply of water to the house and garden. Quiet running and reliable, ideal for suburban areas. Suitable for Drinking Water - tested to AS4020 for Potable Water.



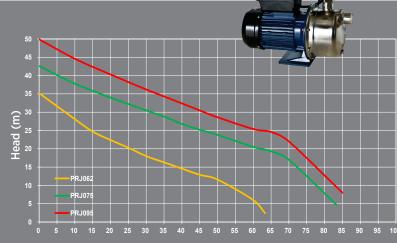

Flow (Litres/Minute)

APPLICATIONS

- Domestic water supply, irrigation & transfer
- Rain to Mains backup system for new housing
- Water storage tank pump set
- Pressure boosting

FEATURES & BENEFITS

- Power saving, high efficiency design, uses up to 50 % less power than many alternatives.
- Automatic pressure controller gives consistent pressure supply with run-dry protection
- Special function pressure controller that automatically checks for water every 24 hours after a run-dry event
- Tested to AS4020 for potable water
- Suction lift up to 8m depth (with foot valve)
- Quick-plug connection on pressure controller
- Maximum liquid temperature 60°C

CONSTRUCTION

- Stainless steel housing & impeller
- Noryl diffuser, jet & venturi, brass barrel union
- 316 stainless shaft
- Carbon/ceramic mechanical seals for reliability
- Motor IP55 with insulation class F
- RPC22ADSQP pressure controller (code: 8379)

AVAILABLE WITH 18L PRESSURE TANK SWITCH & GAUGE											
CODE	MODEL	SIZE (mm)									
8096.PTS	PRJ062	365 x 280 x 650									
8119.PTS	PRJ075	365 x 280 x 690									
8126.PTS	PRJ095	420 x 280 x 700									
 Reliable XMP12 pressure switch Does not have run dry protection Suitable for use with generators 											

CODE	MODEL -	POWER 240V		RATED		MAXIMUM		SUCTION	NO. OF	CABLE	INLET	OUTLET	SIZE
		AMPS	WATTS	FLOW (L/MIN)	HEAD (M)	FLOW (L/MIN)	HEAD (M)	LIFT	TAPS	LENGTH	(MM)	(MM)	LXWXH (MM)
8096	PRJ062	2.5	370	25	20	62	35	8m	4-6	3m	25 FBSP	25 MBSP	365 x 170 x 375
8119	PRJ075	5	750	45	25	76	42	8m	5-8	3m	25 FBSP	25 MBSP	365 x 190 x 395
8126	PRJ095	6	1000	45	30	85	50	8m	7-12	3m	25 FBSP	25 MBSP	420 x 190 x 410