LTEE5A Commercial Washer/Dryer



10 KG FRONT LOAD WASHER AND STACKED 9 KG ELECTRIC DRYER

Features and Benefits

- Low water consumption of only 44.3 litres per wash on a standard cycle with NO options with full wash completed in 30 minutes.
- Pre-Wash and extra rinse option for heavily soiled loads.
- Energy saving 'High Speed Extract' spin cycle of 1,200 rpm producing 'G' forces in excess of 440 for greater water removal, resulting in reduced drying times and associated energy savings.
- 100% front service dryer.

SPECIFICATIONS

DIMENSIONS			
CAPACITY	10 kg washer, 9 kg dryer		
WIDTH	683 mm		
DEPTH	704 mm		
HEIGHT	1,986 mm		
NET WEIGHT	177 kg		
OPERATION			
WASHER CYCLES	6 Cycles, 3 Soil Levels.		
DRYER CYLES	6 Cycles, 3 Fabric Temperatures		
LIGHTS CONTROLS	Yes & Timer Display		
ACTIVATION	Electronic E MECH		
WATER TEMPERATURE	Hot, warm or cold		
MOTOR WASHER SPIN	1 hp, variable speed		
SPEED WASHER	500 - 1,200 rpm, variable speed		
WATER USE WASHER	44.3 litres / wash standard cycle		
HEAT INPUT DRYER	4,000 w		
CONSTRUCTION			
DRUM WASHER	Stainless steel		
OUTER BOWL WASHER	Stainless steel		
OUTER CABINET	Steel		
DRUM DRYER	Galvanised steel		



LTEE5A Commercial Washer/Dryer



TECHNICAL SPECIFICATIONS


UTILITIES		
10 AMP SINGLE PHASE 240 V 50 HZ		
10 AMP CIRCUIT-BREAKER REQUIRED		
1.8 M POWER CORD		
HOT AND COLD WATER CONNECTIONS REQUIRED		
1.2 M HOT AND COLD WATER HOSES SUPPLIED		
WATER SUPPLY HOSE TAP ENDS ¾ BSP THREADS		
MAX HOT WATER CONSUMPTION 31 LITRE / CYCLE (INC PRE-WASH)		
MAX WATER CONSUMPTION 74.2 LITRE / CYCLE		
MAX POWER DRAW 750 W / HR		
DRAIN: 610 - 914 MM UPSTAND, 50 MM DIAMETER		
WATER SUPPLY PRESSURE BETWEEN MAX 820 KPA/MIN 140 KPA		

A=1678mm	F=203mm	K=683mm	P=38mm
B=1477mm	G=391mm	L=*1184mm	Q=*333mm
C=597mm	H=*938mm	M=*1986mm	
D=213mm	I=*368mm	N=52mm	

O=704mm

J=*813mm

UTILITIES DRYER		
20 AMP SINGLE PHASE	240 V 50 Hz	
20 AMP	circuit-breaker required	
1.8 M	Power Cord	
FLUE DIAMETER	102 mm (4 in)	
AIR FLOW	85 litres / second	
MAX POWER DRAW	4,000 w / hour	
OPTIONAL	Right or left side venting	
SHIPPING DIMENSIONS		
WEIGHT	193 kg	
HEIGHT	2,032 mm	
WIDTH	737 mm	
DEPTH	832 mm	
	1.25 m³	

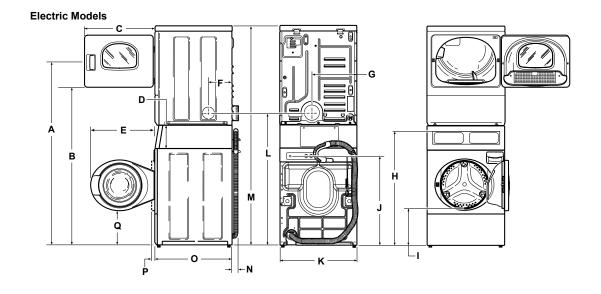

WESTERN AUSTRALIA

E=610mm

7/15 Walters Drive
Osbourne Park WA 6017
T: 08 9445 7744
enquiry@speedqueenwa.com.au

NEW SOUTH WALES & ACT

245 Rawson Street Auburn NSW 2144 T: 02 9748 2155 enquiry@speedqueenlaundry.com.au

SOUTH AUSTRALIA & NT

385-387 Main North Road Enfield SA 5085 T: 08 7095 0336 sa@speedqueenlaundry.com.au

QUEENSLAND

2/18 Gravel Pit Road
Darra QLD 4076
T: 07 3376 3869 *Home retail
qld@speedqueenlaundry.com.au

^{*}For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice.