

TUMBLE DRYERS

DX
RANGE

DX 55

55KG

DX 77

77KG

DX 90

90KG



FEATURES

- Controls:
 - Dual Digital Control or OPL Micro
- Gas, Steam heating, Electrical heating (DX55)
- Large door opening for easy loading and unloading (Ø 68cm)
- Galvanized drum
- Radial airflow
- Standard reversing drum
- Self-cleaning lint screen
- Preheating of intake air

OPTIONS

- Stainless steel drum
- Stainless steel front panel with black painted door
- Residual moisture control Sensodry+®:
 - lower energy and utility costs
 - lower linen replacement costs
- SafeTech™ Fire Suppression System



FAST DRYING



LOW ENERGY
CONSUMPTION




LARGE DOOR
OPENING

senso.dry+

SafeTech™

GET AHEAD IN LAUNDRY

TYPE		DX55	DX77	DX90
CAPACITY				
Capacity	kg	55	77	90
Drum volume	l	1020	1410	1660
Drum diameter	mm	Ø 1120	Ø 1290	Ø 1290
AIRFLOW				
Airflow	l/s	660	1010	1010
DRYING AVERAGE				
Gas heating	g/min	979	1401	1673
Electric heating	g/min	698	-	-
MOTOR				
Fan	kW	1,1	1,1	1,1
Drive	kW	1,1	1,1	1,1
GAS HEATING				
Energy	kBTU/h	270	395	425
Electrical connection		3x 200-240V/50-60Hz, 3x 440-480V/50-60Hz, 3x 380-415V/50-60Hz		
Gas connection	NPT	1"	1"	1"
EXHAUST				
	Ø /mm	254	305	305
DIMENSIONS				
Size H×W×D	mm	2175×1170×1270	2390×1345×1315	2390×1345×1505
Net weight (E, G, S)	kg	565, 555, 605	- , 635, 705	- , 705, 770
TRANSPORT DATA				
Packed (foil) H×W×D	mm	2290×1220×1820	2510×1320×1870	2510×1320×2070
Gross weight (foil,E,G,S)	kg	600, 585, 635	- , 670, 740	- , 740, 805
Packed (crate) H×W×D	mm	2310×1350×1890	2550×1530×1950	2550×1530×2140
Gross weight (crate,E,G,S)	kg	675, 660, 710	- , 755, 825	- , 825, 895

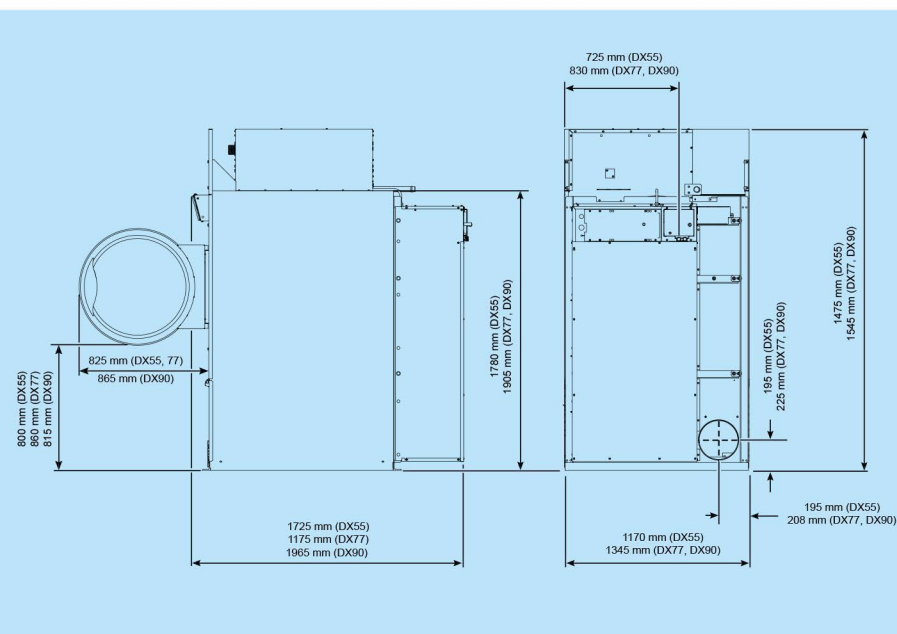

VISIT OUR WEBSITE www.totalce.com.au
CALL US ON **1300 355 769**