# MLT-X735



**AGRICULTURAL HANDLING solutions** 





# A PASSION FOR **FARMING**



As partners to the farming industry for more than 20 years, we know your business is demanding, and on today's modern farm the materials handling plays an important part in the daily farm handling jobs, so you can be sure you'll be able to find within our farming range **THE** MANITOU you need.

The MLT-X 735 rough terrain telehandler is the ideal choice for **performance**. Its impressive capabilities enable you to carry out all your farm handling tasks:

animal feed, harvesting work, bulk loading and unloading,

Arable, dairy and livestock farmers, cereal growers, cooperatives and agricultural contractors will appreciate the qualities of this machine. More than just a handling solution, MANITOU offers you a product which both looks good and is comfortable to use: inside and outside have been cleverly designed to satisfy you. The MLT-X 735 benefits from innovations such as: JSM®\*, Evolution cab,

In short you gain in both **comfort** and **productivity**.

When you choose MANITOU, you can count on a fork lift truck for long term durability. You also benefit from the package of services provided by your dealer: after-sales service, servicing and maintenance contracts, on-site repairs and financing solutions, etc.

Why all this? Because, like you, we take pleasure in a job well done!







# PERFORMANCE ON YOUR FARM

## **Up to 3.5 T**:

The dimensions and wheelbase of the MLT-X 735 mean that loads of up to 3.5 T can be handled in complete safety.

## 6.90 m:

The boom of your MLT lets you carry loads up to 6.90 m in height.

## **24** inch:

The agricultural profile tyres give your machine total adhesion on all types of terrain.



#### You choose

The MLT-X 735 comes with an up to 124 HP engine coupled to a four-speed manual gearbox and a variable flow rate pump up to 150 l/min.



## Style and design

Because you appreciate machines that look good, the design of the MLT-X 735 has been carefully worked on. Its style is marked by delicate lines and slender shapes... you're hooked straight away.

## **Goes anywhere**

Agricultural profile tyres, high ground clearance (44 cm) and an impressive tractive effort will ensure you can work on the most difficult ground conditions. The MLT-X 735 has been developed to help you manage your everyday farm duties.



## YOU FEEL GOOD...



Farming has changed a lot, handling as well.

The interior of the MLT leaves nothing to be desired with its superb bodywork. The driving position has been **ergonomically designed** for maximum comfort. It is fitted with a cloth seat and the fully adjustable steering column can be adapted to suit. Ventilation outlets, sun visor, roof screen, etc. all help to provide you with a comfortable working environment.

Exclusive to MANITOU, **JSM**® lets you control all movements with one hand safely and effortlessly: raising and lowering the boom, crowding and tilting, auxiliary service for operating attachments and also forward/reverse direction of travel. You always keep one hand on the steering wheel to maintain full control of your MLT.

Low noise levels are achieved through the full **soundproofing** of the cab (only 76 dB) and the insulation of the engine compartment.

The dashboard has an analogue display which gives all the information you need during your working day: hour meter, speed, oil temperature, fuel level, etc.

For still more comfort, the Evolution cab gives you all the space you need to feel comfortable throughout the working day.








# **EACH TO THEIR OWN STYLE**

Reacting to customer choice is a MANITOU principle. That's the reason you **can choose between** 3 levels of finish: **Classic**, **Premium** and **Elite**.

Because all your requirements are important, MANITOU provides you with complete peace of mind in all versions of the MLT.





In the **Classic** version, your comfort is increased by:

- Mechanical cloth seat
- Radio player



You are not just opting for a MANITOU, but for **your** MANITOU... The **Premium** finish is differentiated by a number of practical and innovative items:

- Pneumatic cloth seat
- CD/MP3 car radio
- Air conditioning
- Attachment line decompression system: Easy Connect System



The **Elite** version offers a top specification model:

- · Low-frequency pneumatic cloth seat with heating
- Bluetooth car radio
- Air conditioning
- Boom suspension
- Attachment line decompression system: Easy Connect System
- Self-cleaning pre-filter
- Radiator auto cleaning system

# **DESIGNED TO OPTIMISE POWER** AND FUEL **EFFICIENCY**



Each telehandler must have a suitable power unit to give you the best engine/machine torque: too little power and you lose efficiency, too much power could increase consumption to no effect.

The MLT-X 735 is supplied with a PERKINS stage 3A engine, 4.4I, up to 124 HP, four cylinder turbo engine. Providing you with the capacities required and an ideal power/weight ratio, this engine will support you in everything you do.

All the major components of your machine (power unit, transmission, axles, hydraulics and tyres) are combined in such a way as to optimise the power produced by your engine.



## **Up to 124 HP:**

The Perkins engine offers an ideal power/weight ratio. The 124 HP available provide you with efficient daily fuel consumption.

## 4-speed gearbox:

You will find the gearbox suited to your needs: 4-speed mechanical.





# YOU WILL HAVE TIME TO SPARE

**Save yourself time** to concentrate on what matters - that's MANITOU's philosophy when it comes to handling: fast working cycles and driver comfort are good examples.

**For maximum efficiency,** MANITOU offers you a machine which is simple to use. **Quick and easy to learn** (JSM®, controls perfectly placed), your machine is the solution to all your farm handling duties.

**Manoeuvrability is essential!** With your MLT-X 735, you will be able to do even more work: the more time you spend at the wheel the more your efficiency will be increased.

Your productivity and safety is greatly enhanced by a wide range of attachments which increases the performance and overall utilisation of your machine. The development of our machinery with approved accessories optimises your work cycles while respecting all relevant industry standards. An extensive choice of

attachments from bale clamp, buckets, manure forks, feeding bucket and sweepers... MANITOU is with you to meet all your needs.



## **Loading comparison data**



Sources: Data MANITOU

## Up to 150 I/min:

The hydraulic pump of your MLT, combined with the JSM®, delivers a maximum flow rate of 150 I/min for quick and accurate movements.

#### 4 x 4 x 4:

4 wheel drive and 4 wheel steer = manoeuvrability for getting out of all situations.

## YOU ARE SAFE

#### **SORRY, WE DON'T DESIGN TOYS**

Our **design department**, employing more than 200 engineers and technicians, have specialised in the design of agricultural telehandlers **for more than 20 years**. With more than 50 registered patents, our knowledge and expertise with regard to the structure of the machine offers you reliability and durability. A fully comprehensive testing procedure and «best practice» methods are applied to ensure quality manufacturing at all levels, utilising all the latest modern technology.

Specialists in agriculture, MANITOU develop their product range with the customer in mind, selecting components to suit the most arduous farm handling needs, **your machine like the MANITOU company is 100% dedicated to agriculture**: the tyres, transmission and even the cooling system have been logically chosen and assembled.



#### **YOU ARE PROTECTED**

Your working environment must above all be a safe area.

The excellent **stability** of the MLT-X 735 combined with the aggravating movement arrestor allows you to handle maximum loads up

to 3.5 tonnes with complete


confidence.

Your **safety** is further reinforced by the presence detector located in the seat. Travel movements are only allowed when you are sitting in the driving seat.

The cab has been especially designed to protect you. Satisfying ROPS/FOPS\* requirements, withstanding rolling over, heavy objects falling and therefore prevents distortion to the cab.

A large window area, lateral engine, low boom pivot as well as the high seating position gives you 360° visibility guaranteeing both your own safety and that of everyone around you.

\* ROPS: rollover protection structure FOPS: falling objects protection structure

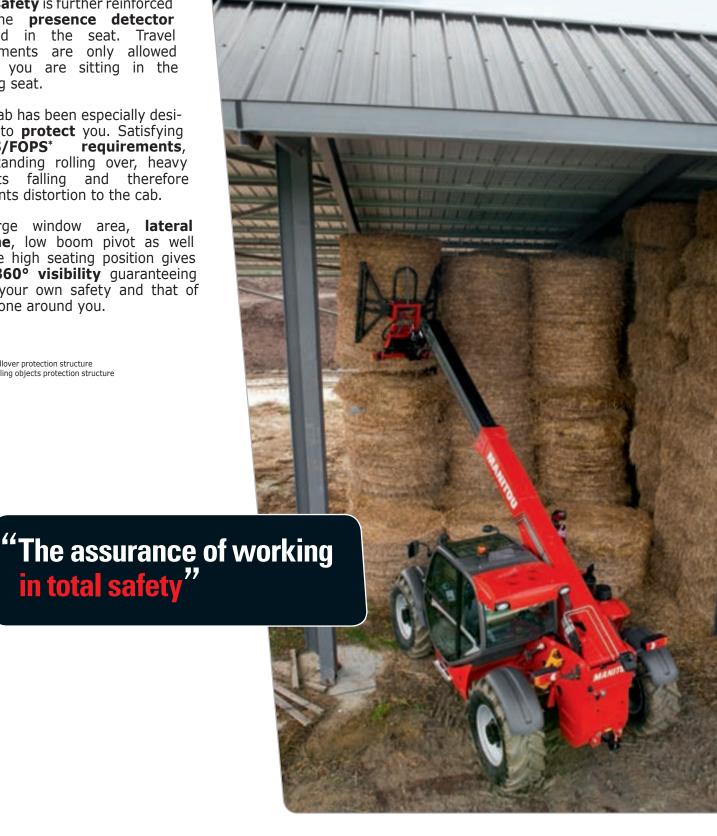

# **SEE FURTHER**

#### OFFERING YOU MADE-TO-MEASURE SERVICES

The close proximity of a network of experts at your service.

Your local MANITOU dealer is dedicated to providing a first class after sales back up. The know-how, experience and commitment of MANITOU, at more than 500 dealers throughout the world, ensure you will have professional support on a daily basis.

**Lease and Finance Solutions.** Your MANITOU dealer is your best partner to assist you in your financialplanning. Manitou Finance offer a fully flexible choice of financial solutions.

**Maintenance and after-sales service:** so that your telehandler is operational all year round, your dealer can offer you maintenance contracts suited to your budget and your needs. You will reduce your usage costs and have the guarantee of your equipment being regularly monitored. MANITOU is committed to maintaining your productivity on a daily basis.



A financial contract allowing you to be aware in advance of the technician's labour and travel costs for preventive maintenance of your machine (parts and supplies not included in the contract.



Maintenance contract which includes the totality of the cost of preventive maintenance for your machine -labour, travel, supply of consumables needed for periodic maintenance.




You can sign up for an extension of guarantee of 12 or 24 months.



A simple and flexible fleet-management system (with or without geolocation) to keep track with precision of the utilisation of your machine.



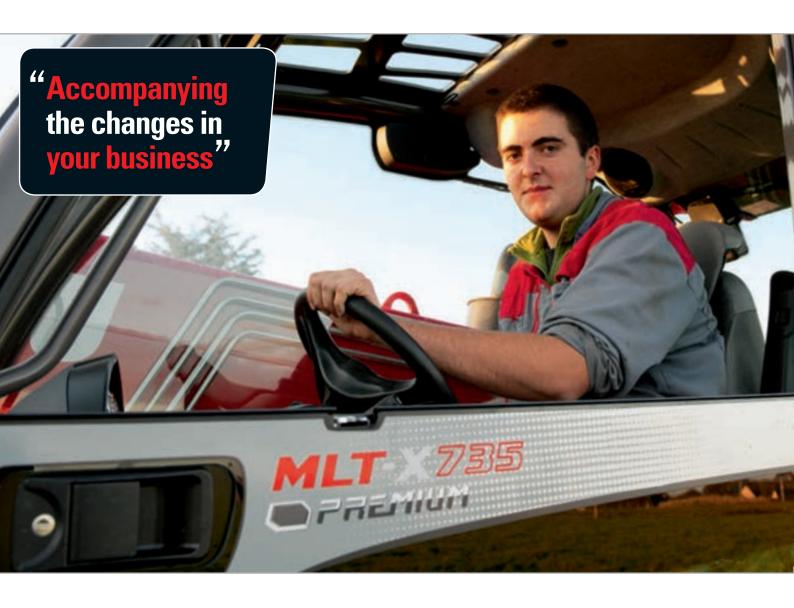

#### REDUCE YOUR ECOLOGICAL FOOTPRINT

From the design stage of your machine, MANITOU does everything to **respect the environment**.

Our Ancenis production site, certified **ISO 14001**\*, guarantees that environmental standards are included from the design stage of the product up to the delivery of the machine to your business. Daily routine procedures include the selection of the least polluting components, selective sorting, treatment of special wastes and quite simply daily vigilance (energy, paper savings, etc.).

The optimum management of the engine speed according to the power demanded **minimises your consumption** and your polluting emissions, thus reducing the impact of the use of your MLT on the environment.

<sup>\*</sup> ISO 14001: international environmental management standard which lays down requirements relating to the implementation of an environment management system.

# **YOU CHOOSE**


Standard and optional equipment	<b>■</b> CLA55IC	PREMIUM	<b>■</b> <i>LITE</i>
Tuner car radio	•	-	-
CD/MP3 car radio	0	•	-
Bluetooth car radio	0	0	•
Air conditioning	0	•	•
Low-frequency pneumatic cloth seat	0	0	-
Cloth seat	•	-	-
Pneumatic cloth seat	0	•	-
Self-cleaning pre-filter	0	0	•
Easy Connect System	0	•	•
Suspension of the boom - «CRC» Confort Ride Control	0	0	•
Reversible fan AUTOCLEAN SYSTEM (Self cleaning pre-filter included)	0	0	•

Standard

O Option

- Not available

#### A selection of attachments available:

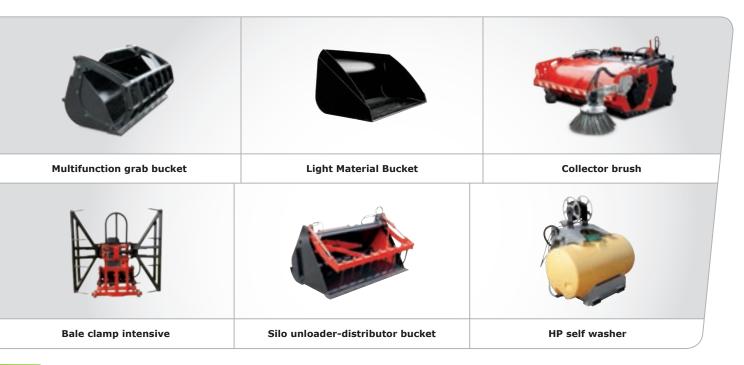



# MLT-X735


		MLT-X 735 TLSU	MLT-X 735-120 LSU	
	<b>Lifting capacity</b> at 500 mm from fork heels	350	3500 kg	
	Break-out force	3600 daN	3700 daN	
	Lifting height	6.9	90 m	
	Time: laden/unladen (in sec)			
	Lifting	7.30/7.50	6.70/7.30	
	Lowering	5.60/5.60	4.80/4.60	
	Extension	8.20/8.30	7.10/7.30	
	Retraction	6.60/6.80	5.70/5.50	
	Crowd	3.20	2.00	
	Dump	2.70	2.30	
0	Tyres	460/	460/70 R24	
Л	Forks (mm)			
	Length x width x thickness	1200 x	125 x 45	
	Carriage rotation	1	46°	
U	Braking		disk brake with oil bath ront and rear axles	
	PERKINS STAGE III A engine	1104D-44TA	1104E-44TA	
	Cubic capacity	4 cyl. Turb	oo/4400 cm <sup>3</sup>	
	Power at 2200 rpm (ISO/TR 14396)	101 HP/74.5 kW	124 HP/91 kW	
	Max. torque at 1400 rpm (ISO/TR 14396)	410 Nm	490 Nm	
	Injection	di	rect	
	Cooling	water		
	Transmission	torque converter		
	Gearbox	Power	rshuttle	
	Number of gears (forward/reverse)	4	1/4	
	Max. travel speed	35	kph*	
	Hydraulics	110 l/min - 270 bar	150 l/min - 270 bar	
	Piston pump	variable cubic capacity	electronically controlled variable cubic capacity	
	Control valve	D	DIC	
F	Capacities			
	Hydraulic oil	1.	135 l	
	Fuel	120		
	Unladen weight (with forks)	7075 kg	7100 kg	
	Width overall	2.4	10 m	
	Height overall	2.30 m		
	Length overall	4.87 m		
	Turning radius (outer wheels)	3.77 m		
	Ground clearance	0.44 m		
	Drawbar pull	up to 8770 daN		
	Noise at driving position (LpA)	79 dB		
	Environmental noise (LwA)	106 dB		
	Vibration to whole hand/arm	< 2.5 m/s <sup>2</sup>		

#### Maximum height reach: 1.03 m

As per standard EN 1459 annex B











mm		
Α	1200	
В	2810	
С	1191.4	
C1	1287	
D	4790.4	
D1	4886	

D2	4165
E	5990.4
F	1935
F1	1935
G	450
G1	435
G2	435

I	789
J	980
K	1260
L	45
N	1715
0	125
P2	38°

P3	53°
R	3685
S	7714.9
Т	3575
U1	2295
U2	2545
٧	4885

V1	1310
V2	3918.5
W	2402
Υ	12.5°
Z	133.7°

This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508 RCS Nantes



#### Your nearest **MANITOU** dealer:

