


EXIT AIR TEMPERATURE : 25°C

HUMIDITY: 60%

AIR FLOW RATE: 105 m³/h

HEAT RECOVERY PER HOUR: 6 kWh
 (VALUES CALCULATED ON THE BASIS OF THE SHORTEST CYCLE)

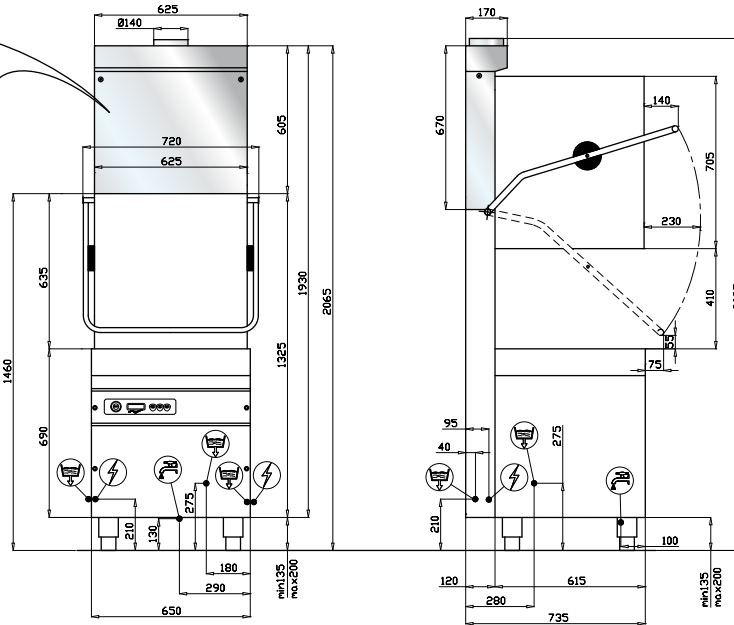

	WATER CONNECTION 3/4" GAS
	DRAIN PIPE Ø 24mm
	ELECTRICAL SUPPLY

TECHNICAL DATA					
EXTERNAL DIMENSIONS					
width	720 mm				
depth	735 mm				
height	2095 mm				
WEIGHT(basic version)	145 kg				
VOLTAGE	400V 3N 50Hz				
POWER REQUIRED	10490 W				
WATER HARDNESS	<8 °F				
WATER CONDUCTIVITY	> 200 µS/cm				
INLET WATER PRESSURE	200-400 kPa				
CROCKERY DIMENSIONS					
plates diameter	410 mm				
trays max. dimension	GASTRONORM 1/1 (530x325)				
RACK DIMENSION	500X500 mm				
RACK EQUIPMENT	2XC40 - 1XC44 - 2X15060				
WASHING CYCLES (sec)	1 (50)	2 (90)	3(120)	4(180)	5(300)
WATER SUPPLY 10°C					
racks/h(*) ⁽¹⁾	55	40	30	20	12
WATER CONSUMPTION / CYCLE	2,6 L				
BOILER CAPACITY	15 L				
BOILER HEATING ELEMENT	9000 W				
RINSING TEMPERATURE (SET)	85°C				
TANK CAPACITY	42 L				
TANK HEATING ELEMENT	2700 W				
TANK TEMPERATURE (SET)	55°C				
PUMPS POWER washing / rinsing	1490 (800 L/min***)/250 W				
DRAIN PUMP (optional)	25 W (40 L/min***)				
NOISE	66.4±0.7 dB(A)				

(*) STANDARD TERMOSTOP

(***) MAXIMUM FLOW RATE

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.