

Modular Super-Flake Ice Machine up to 600 Kg/24h.

Other models in this range:
MF 46 - MF 47 - MF 58 Split
MF 59 Split - MF 66 - MF 68 Split
MF 69 Split - MF 86 - MF 88 Split




Features

- Modular Superflake ice machine, production up to 600 kg in 24 hours
- Hermetic compressor
- Choice of air, water or remote air-cooled condensers
- Stainless steel auger and freezing cylinder (evaporator)
- Equipped with an electronic control board
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of ice (85% dry)
- Long-lasting stainless steel ball-bearings
- Double protection - electronic rotation sensor and drive coupling-on gear motor and gear reducer
- Low- water sensor protection on refrigeration and gear motor system
- Optical ice level sensor for machine shut down
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics
- Side panels are removable on all four sides to ease maintenance and after-sales service operations
- PS plastic top cover
- Reduced height to ease installation
- CFC Free R-404A Refrigerant

Optional Features (special order):

- UV lamp for bacterial control
- Anti-scale, anti-algae water filtration system

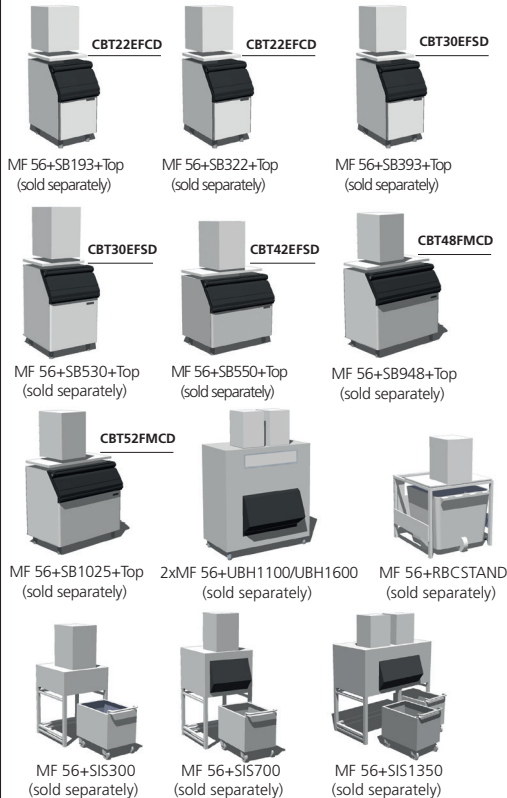

MF 56 Technologies



						 [WxDxH mm] 538X663X790
		10°: 10°C		21°: 15°C		
MF 56 AS		600 [kg]	1323 [lbs]	540 [kg]	1190 [lbs]	[WxDxH inches] 213/16 x 261/8 x 311/8
MF 56 WS		600 [kg]	1323 [lbs]	560 [kg]	1234 [lbs]	
MF 56 ASR		600 [kg]	1323 [lbs]	540 [kg]	1190 [lbs]	
				 [v/Hz/ph] 230/50/1 also available in 230/60/1	 R 404 A	

Super-flake ice, extruded just below 0° Celsius, retains only 15-18% of residual water, making it relatively dry and compact.



Residual water content 15%

This product qualifies for the following listings:



2 Years Warranty

Subject to certain limitations and exclusions


Certified ISO 9001

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Modular Super-Flake Ice Machine up to 600 Kg/24h.

Other models in this range:
MF 46 - MF 47 - MF 58 Split
MF 59 Split - MF 66 - MF 68 Split
MF 69 Split - MF 86 - MF 88 Split

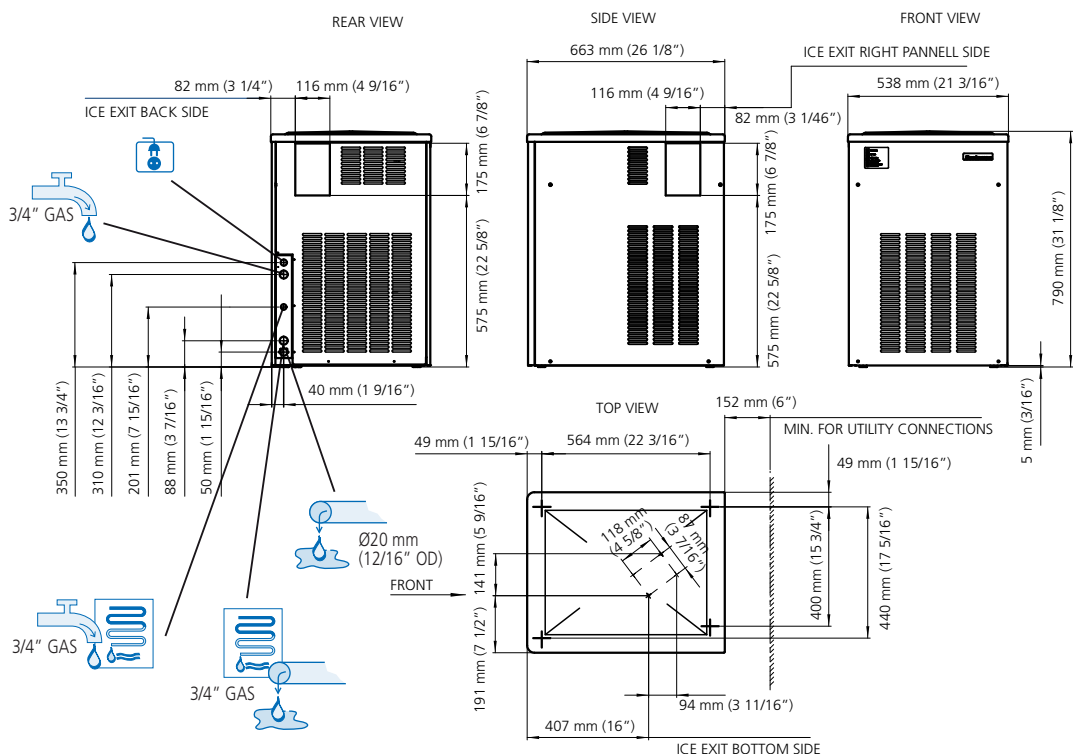

MF 56 AIR COOLED

MF 56 WATER COOLED

°C / °F	50° / 10°				60° / 15°				70° / 21°				90° / 32°																						
	10°	600	560	520	440	kg	50°	1323	1234	1146	970	lbs	21°	580	540	500	420	kg	70°	1278	1190	1102	926	lbs	32°	500	470	440	380	kg	90°	1102	1036	970	838
38°	410	390	370	330	kg	100	904	860	816	727	lbs																								

°C / °F	50° / 10°				60° / 15°				70° / 21°				90° / 32°																						
	10°	600	570	540	480	kg	50°	1323	1256	1190	1058	lbs	21°	590	560	530	470	kg	70°	1300	1234	1168	1036	lbs	32°	580	550	520	460	kg	90°	1278	1212	1146	1014
38°	570	540	513	450	kg	100	1256	1190	1131	992	lbs																								



(in 230/50/1 specs)



Minimum	Maximum
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
-10%	+10%
1 BAR 14 psi	5 BAR 70 psi

	Ice Type	Capacity [Btu/h] [W]	Ice Size [Ømm ²]	Power [W]	FUSE	Energy [kWh] - 100 Kg	Water [l/h]	Water [gal/h]	Weight [kg] [lbs]	Dimensions [kg] [lbs]
MF 56 AS	Air Cooled	17152 5030	3x1.5	2000	16 A	10,2	18	4,8	94 207	103 227
MF 56 WS	Water Cooled	17152 5030	3x1.5	2000	16 A	8,7	185	49	94 207	103 227
MF 56 ASR	Air Cooled	17152 5030	3x1.5	2000	16 A	10,2	18	4,8	88 194	97 213

IMPORTANT NOTICE:

Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com