

**8a Jade – Sandwich & Preparation Counter with Canopy Blown Air Well**

**Jade – SC**

**Features:**

- Designed for 43°C ambient environment
- Adjustable electronic controller with digital temperature display
- Square glass canopy
- Refrigerated blown air over and under ALL pans – maximizes food holding capacity and refrigeration efficiency
- Polycarbonate sliding lids over blown air well
- Fully enclosed stainless steel well under food pans – prevents food from dropping into cabinet
- Polypropylene cutting board (10mm thick)
- One plastic coated shelf per door
- Forced air refrigeration system contained in a removable cassette for easy servicing and maintenance
- Auto defrost
- Waste heat recovery vaporiser
- Self closing doors with easy to clean handles
- 304 stainless worktop
- Swivel and brake castors
- Anti corrosive evaporator coil coating
- Hermetique compressor



MODEL	HJ1SCBA	HJ2SCBA	HJ3SCBA
Capacity	250 litres 10 x 1/6 x 100mm deep Pans	500 litre 18 x 1/6 x 100mm deep Pans	750 litre 24 x 1/6 x 100mm deep Pans
<b>Finish: White Colorbond® interior and exterior with stainless steel internal floor, pan and preparation area*</b>			
Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wt-refrigeration Watts (nom.)	<b>HJ1SCBA</b> 160/3.8/600	<b>HJ2SCBA</b> 210/4.8/750	<b>HJ3SCBA</b> 240/4.8/980
<b>Finish: Stainless Steel interior and exterior*</b>			
Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wt-refrigeration Watts (nom.)	<b>HJ1SCBASS</b> 160/3.8/600	<b>HJ2SCBASS</b> 210/4.8/750	<b>HJ3SCBASS</b> 240/4.8/980


\*Refer notes page 26

Gas: Self-contained fridge R134a@-5C SST  
Remote units R404a (others available)  
Electrical lead length 1.5m min. 240V 50Hz  
Heat rejection self-contained units: Fridge 1.4xWr

Options (see p. 26)



- Stainless steel shelf 
- Locking tabs 
- Cylindrical locks 
- Right Hand services 
- Pan modules 

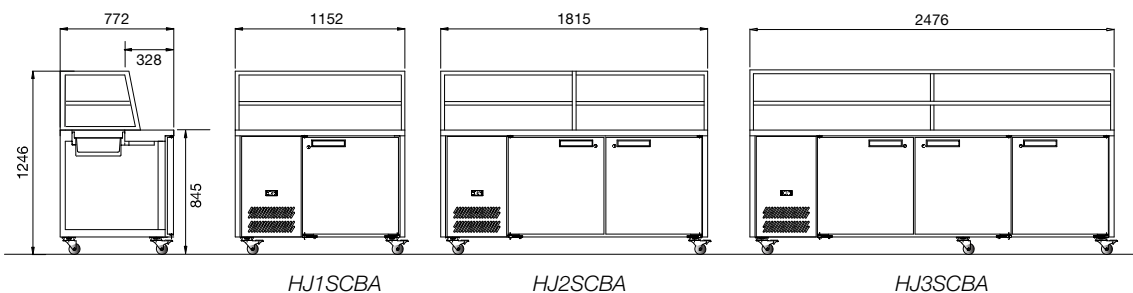

Prices do not include GST. Prices and specifications are subject to change without notice.